

NACOmatic

Effective: 17-December-2009

Expires: 11-February-2010

Your Ad Here

~80,000 Page views/month

Contact:

Doug Ranz

248-318-0011

NACOmatic@hotmail.com

Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

40G	=>	40
44A	=>	55
AVQ	=>	60
AZC	=>	31
BXK	=>	27
CFT	=>	30
CGZ	=>	29
CHD	=>	29
CMR	=>	64
DGL	=>	33
DMA	=>	32
DUG	=>	34
DVT	=>	51
E37	=>	53
E60	=>	34
FFZ	=>	47
FHU	=>	36
FLG	=>	35
GCN	=>	40
GEU	=>	38
GYR	=>	39
HII	=>	43
IFP	=>	28
IGM	=>	42
INW	=>	65
IWA	=>	53
LGF	=>	42
LUF	=>	43
MZJ	=>	45
NYL	=>	66
OLS	=>	48
P01	=>	26
PAN	=>	49
PGA	=>	48
PHX	=>	52
PRC	=>	54
RQE	=>	65
RYN	=>	61
SAD	=>	55
SDL	=>	56
SEZ	=>	57
SJN	=>	55
SOW	=>	58
TUS	=>	62
TYL	=>	59

GENERAL INFORMATION

This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the National Aeronautical Charting Office, FAA, Department of Transportation, Silver Spring, Maryland 20910. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: <http://nfdc.faa.gov/portal/airportchanges.do>

FAA, Aeronautical Information Services, ATO-R, Rm. 626
800 Independence Ave., SW
Washington, DC 20591
Telephone 1-866-295-8236
Fax 202-267-5322
Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

	Airport Information	Airspace Information*
Effective Date	Cut-off date	Cut-off date
17 Dec 09	4 Nov 09	15 Oct 09
11 Feb 10	30 Dec 09	10 Dec 09
8 Apr 10	24 Feb 10	4 Feb 10
3 Jun 10	21 Apr 10	1 Apr 10
29 Jul 10	16 Jun 10	27 May 10
23 Sep 10	11 Aug 10	22 Jul 10

*Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Charting Office, ATO-W
SSMC-4 Sta. #2335
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our web site at www.naco.faa.gov.
See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Charting Office
Distribution Division, ATO-W
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at www.naco.faa.gov
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized FAA Chart Agent

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertical line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

TABLE OF CONTENTS

General Information.....	Inside Front Cover
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
Arizona	22
California	62
Colorado	200
Nevada	239
New Mexico.....	261
Utah	287
City/Military Airport Cross Reference	310
Seaplane Landing Areas	311
Special Notices.....	312
Regulatory Notices	331
FAA and National Weather Service	
Telephone Numbers	332
Key to Aviation Weather Reports	333
Air Traffic Facilities Telephone Numbers	335
Air Route Traffic Control Centers	337
Flight Service Station Communication Frequencies	339
Flight Standards District Offices.....	342
Routes/Waypoints	
Low Altitude Directional Routes	343
High Altitude Preferred Routes.....	344
High Altitude Directional Routes	349
Q-Routes.....	350
Tower Enroute Control Routes	353
RNAV Routing Pitch and Catch Points	365
VFR Waypoints.....	376
VOR Receiver Check	384
Parachute Jumping Areas	389
Aeronautical Chart Bulletins	392
Supplemental Communication Reference	403
Airport Diagrams	409
National Weather Service (NWS) Upper Air Observing Stations	544
Enroute Flight Advisory Service (EFAS)	Inside Back Cover

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

AAF	Army Air Field	byd	beyond
AB	Airbase	C	Commercial Circuit (Telephone)
abv	above	CGAF	Coast Guard Air Facility
ACC	Air Combat Command; Area Control Center	CGAS	Coast Guard Air Station
acft	aircraft	CIV	Civil
ADCC	Air Defense Control Center	clsd	closed
AER	approach end rwy	comd	command
AFB	Air Force Base	CONUS	Continental United States
AFHP	Air Force Heliport	CSTMS	Customs
afld	airfield	ctc	contact
AFOD	US Army Flight Operations Detachment	ctl	control
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	dalgt	daylight
AFSS	Automated Flight Service Station	Dec	December
AG	Agriculture	DIAP	DoD Instrument Approach Procedure
A-GEAR	Arresting Gear	DoD	Department of Defense
AGL	above ground level	DSN	Defense Switching Network (Telephone)
AHP	Army heliport	dspld	displaced
ALS	Approach Light System	durn	duration
alt	altitude	eff	effective
AMC	Air Mobility Command	emerg	emergency
ANGS	Air National Guard Station	EOR	End of Runway
apch	approach	ETA	Estimated Time of Arrival
Apr	April	ETD	Estimated Time of Departure
APU	Auxiliary Power Unit	exc	except
ARB	Air Reserve Base	extd	extend
arpt	airport	FBO	fixed-base operator
ARS	Air Reserve Station	Feb	February
AS	Air Station	fld	field
ASDE-X	Airport Surface Detection Equipment—Model X	FLIP	Flight Information Publication
ASU	Aircraft Starting Unit	flt	flight
ATC	Air Traffic Control	flw	follow
Aug	August	Fri	Friday
AUW	All Up Weight (gross weight)	FSS	Flight Service Station
avbl	available	GA	glide angle
bcn	beacon	GCA	Ground Controlled Approach
blo	below	GS	glide slope
		haz	hazard
		HQ	Headquarters

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

hr	hour	npi	non precision instrument
IAP	Instrument Approach Procedure	NS ABTMT	Noise Abatement
ICAO	International Civil Aviation Organization	NSTD	nonstandard
IFR	Instrument Flight Rules	ntc	notice
ILS	Instrument Landing System	obsn	observation
IM	Inner Marker	Oct	October
IMG	Immigration	OLF	Outlying Field
incr	increase	opr	operate, operator, operational
indef	indefinite	ops	operations
ints	intensity	OTS	out of service
invo	in the vicinity of	ovrn	overrun
IMC	Instrument Meteorological Conditions	PAEW	personnel and equipment working
Jan	January	pat	pattern
JASU	Jet Aircraft Starting Unit	p-line	power line
JOAP	Joint Oil Analysis Program	PMSV	Pilot-to-Metro Service
JOSAC	Joint Operational Support Airlift Center	POL	Petrol, Oils and Lubricants
JRB	Joint Reserve Base	PPR	prior permission required
Jul	July	PRM	Precision Runway Monitoring
Jun	June	PTD	Pilot to Dispatcher
Kt	Knots	RAMCC	Regional Air Movement Control Center
LAA	Local Airport Advisory	req	request
LAHSO	Land and Hold Short Operations	rgt tfc	right traffic
lbs	pounds	RON	Remain Overnight
ldg	landing	rqr	require
lgt	lighted	rstd	restricted
lgts	lights	RSRS	reduced same runway separation
LMM	Compass locator at Middle Marker ILS	rw	runway
LOC	Localizer	Sat	Saturday
LOM	Compass locator at Outer Marker ILS	SELF	Strategic Expeditionary Landing Field
ltd	limited	Sep	September
MACC	Military Area Control Center	SFA	Single Frequency Approach
Mar	March	sfc	surface
MCAF	Marine Corps Air Facility	SFRA	Special Flight Rules Area
MCAFL	Marine Corps Auxiliary Landing Field	SOAP	Spectrometric Oil Analysis Program
MCAS	Marine Corps Air Station	SOF	Supervisor of Flying
MCB	Marine Corps Base	SPB	Seaplane Base
med	medium	SR	sunrise
METRO	Pilot-to-Metro voice call	SS	sunset
Mil	military	std	standard
min	minute	Sun	Sunday
MLS	Microwave Landing System	svc	service
MM	Middle Marker of ILS	tfc	traffic
Mon	Monday	thld	threshold
MP	Maintenance Period	Thu	Thursday
MSL	mean sea level	tkf	take-off
MSAW	minimum safe altitude warning	tmpry	temporary
NAAS	Naval Auxiliary Air Station	tran	transient
NADC	Naval Air Development Center	Tue	Tuesday
NADEP	Naval Air Depot	twr	tower
NAEC	Naval Air Engineering Center	twy	taxiway
NAES	Naval Air Engineering Station	UC	Under Construction
NAF	Naval Air Facility	USA	United States Army
NALCO	Naval Air Logistics Control Office	USAF	United States Air Force
NALO	Navy Air Logistics Office	USCG	United States Coast Guard
NALF	Naval Auxiliary Landing Field	USN	United States Navy
NAS	Naval Air Station	V	Defense Switching Network (telephone, formerly AUTOVON)
NAWC	Naval Air Warfare Center	VFR	Visual Flight Rules
NAWS	Naval Air Weapons Station	VIP	Very Important Person
ngt	night	VMC	Visual Meteorological Conditions
NOLF	Naval Outlying Field	Wed	Wednesday
Nov	November	wx	weather

DIRECTORY LEGEND

SAMPLE

① CITY NAME
 ② AIRPORT NAME (ALTERNATE NAME) (LTS) (KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20' JACKSONVILLE
 ③ 200 B S4 FUEL 100 OX 1 TPA-1000(800) AOE Class IV, ARFF Index A NOTAM FILE ORL Not insp. COPTER
 ④ ⑤ ⑥ ⑦ ⑧ ⑨ H-46, L-19C IAP, DIAP, AD

⑩ RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
 S-90, D-160, DT-300 PCN 80 R/B/W/T HIRL CL
 RWY 18: LDIN. MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
 Thld displcd 300'. Trees. Rgt tfc. 0.3% up.
 RWY 36: ALSF1. 0.4% down.
 RWY 09-27: H6000X150 (ASPH) MIRL
 RWY 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T

⑪ LAND AND HOLD SHORT OPERATIONS
 LANDING HOLD SHORT POINT DIST AVBL
 RWY 18 09-27 6500
 RWY 36 09-27 5400

⑫ RUNWAY DECLARED DISTANCE INFORMATION
 RWY 18: TORA-12004 TODA-12704 ASDA-11704 LDA-11504
 RWY 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704

⑬ ARRESTING GEAR/SYSTEM
 RWY 18 → HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
 BAK-14 BAK-12 (B) (1087') HOOK E5 (74' OVRN) ← RWY 36

⑭ MILITARY SERVICE: A-GEAR E-5 connected on dep end, disconnected on
 apch end. JASU 3(AM32A-60) 2(A/M32A-86)

⑮ ⑯ FUEL J8(Mil) (NC-100, A) FLUID W SP PRESAIR LOX
 OIL O-128 TRAN ALERT Avbl 1300-0200Z†, svc limited weekends.

⑰ ⑱ AIRPORT REMARKS: Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute
 Jumping. Deer invov arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service
 (ADCUS) avbl.

⑲ MILITARY REMARKS: ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15
 minutes prior to ldg and after dep. Limited tran parking.


⑳ WEATHER DATA SOURCES: AWOS-1 120.3 (202) 426-8000. LLWAS.

㉑ COMMUNICATIONS: SFA ATIS 127.25 273.5 (202) 426-8003 UNICOM 122.95 PTD 372.2
 NAME FSS (ORL) on arpt. 123.65 122.65 122.2
 NAME RCO 112.2T 112.1R (NAME RADIO)
 ㉒ NAME APP/DEP CON 128.35 257.725 (1200-0400Z†)
 TOWER 119.65 255.6 (1200-0400Z†) GND CON 121.7 GCO 135.075 (ORLANDO CLNC) CLNC DEL 125.55
 NAME COMD POST (GERONIMO) 311.0 321.4 6761 PMSV METRO 239.8 NAME OPS 257.5

㉓ AIRSPACE: CLASS B See VFR Terminal Area Chart.

㉔ RADIO AIDS TO NAVIGATION: NOTAM FILE ORL. VHF/DF ctc FSS.
 (H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
 (H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
 HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
 ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
 ASR/PAR (1200-0400Z†)

㉕ COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.
 HELIPAD H1: H100X75 (ASPH)
 HELIPAD H2: H60X60 (ASPH)
 HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.
 187 TPA 1000(813)
 WATERWAY 15-33: 5000X425 (WATER)
 SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of
 arpt not visible from twr and are required to ctc twr.



All bearings and radials are magnetic unless otherwise specified.
 All mileages are nautical unless otherwise noted.

All times are Coordinated Universal Time (UTC) except as noted.

All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.

The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).
















10

SKETCH LEGEND







RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane,	
Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways ..	






MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions ..	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

















VORTAC ...		VOR	
VOR/DME ..		NDB	
TACAN		NDB/DME	

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1) Negative symbology, e.g., (A1) (V) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 ..	
(A1) Approach Lighting System ALSF-1 ..	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALSR and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(V) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar ..	
(F) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Nav aids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	N	Navy
AF	US Air Force	NAF	Naval Air Facility
ANG	Air National Guard	NAS	Naval Air Station
AR	US Army Reserve	NASA	National Air and Space Administration
ARNG	US Army National Guard	P	US Civil Airport Wherein Permit Covers
CG	US Coast Guard		Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

7 GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

8 CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be depicted as GOMW and GOMC.

9 INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAM

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5–4–5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city and airport name.

10 AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbolology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

11 ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00'". When elevation is below sea level a minus "–" sign will precede the figure.

12 ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

13 SERVICING—CIVIL

S1: Minor airframe repairs.	S5: Major airframe repairs.
S2: Minor airframe and minor powerplant repairs.	S6: Minor airframe and major powerplant repairs.
S3: Major airframe and minor powerplant repairs.	S7: Major powerplant repairs.
S4: Major airframe and major powerplant repairs.	S8: Minor powerplant repairs.

14 FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	J4 (JP4)	(JP–4 military specification) FP** minus 58° C.
100LL	100LL gasoline (low lead) (Blue)	J5 (JP5)	(JP–5 military specification) Kerosene with FS–11, FP** minus 46°C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J8 (JP8)	(JP–8 military specification) Jet A–1, Kerosene with FS–II*, FP** minus 47°C.
A	Jet A, Kerosene, without FS–II*, FP** minus 40° C.	J8+100	(JP–8 military specification) Jet A–1, Kerosene with FS–II*, FP** minus 47°C, with-fuel additive package that improves thermo stability characteristics of JP–8.
A+	Jet A, Kerosene, with FS–II*, FP** minus 40°C.	J	(Jet Fuel Type Unknown)
A1	Jet A–1, Kerosene, without FS–II*, FP** minus 47°C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1+	Jet A–1, Kerosene with FS–II*, FP** minus 47° C.		
B	Jet B, Wide-cut, turbine fuel without FS–II*, FP** minus 50° C.		

*(Fuel System Icing Inhibitor)

**(Freeze Point)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

15 OXYGEN—CIVIL

OX 1 High Pressure	OX 3 High Pressure—Replacement Bottles
OX 2 Low Pressure	OX 4 Low Pressure—Replacement Bottles

16 TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

17 AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

US Customs Air and Sea Ports, Inspectors and Agents

Northeast Sector (New England and Atlantic States—ME to MD)

407-975-1740

Southeast Sector (Atlantic States—DC, WV, VA to FL)

407-975-1780

Central Sector (Interior of the US, including Gulf states—MS, AL, LA)

407-975-1760

Southwest East Sector (OK and eastern TX)

407-975-1840

Southwest West Sector (Western TX, NM and AZ)

407-975-1820

Pacific Sector (WA, OR, CA, HI and AK)

407-975-1800

18 CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

14 CFR PART 139 CERTIFICATED AIRPORTS
AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

14 CFR—PART 139 CERTIFICATED AIRPORTS

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Airport Index	Required No. Vehicles	Aircraft Length	Scheduled Departures	Agent + Water for Foam
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126' ----- ≥126', <159'	≥5 ----- <5	Index A + 1500 gal H ₂ O
C	2 or 3	≥126', <159' ----- ≥159', <200'	≥5 ----- <5	Index A + 3000 gal H ₂ O
D	3	≥159', <200' ----- >200'	<5	Index A + 4000 gal H ₂ O
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

19 NOTAM SERVICE

All public use landing areas are provided NOTAM "D" (distant dissemination) and NOTAM "L" (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. "NOTAM FILE IAD". See AIM, Basic Flight Information and

ATC Procedures for detailed description of NOTAM's. Current NOTAMS are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMS are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.jcs.mil.

20 FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

21 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND LENGTH

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(PSP)—Pierced steel plank
(ASPH)—Asphalt	(MATS)—Pierced steel planking, landing mats, membranes	(RFSC)—Rubberized friction seal coat
(CONC)—Concrete	(PEM)—Part concrete, part asphalt	(TURF)—Turf
(DIRT)—Dirt	(PFC)—Porous friction courses	(TRTD)—Treated
(GRVD)—Grooved		(WC)—Wire combed

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TDT	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
 - R — Rigid
 - F — Flexible
- (3) The pavement subgrade category:
 - A — High
 - B — Medium
 - C — Low
 - D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
 - W — High, no limit
 - X — Medium, limited to 217 psi
 - Y — Low, limited to 145 psi
 - Z — Very low, limited to 73 psi
- (5) Pavement evaluation method:
 - T — Technical evaluation
 - U — By experience of aircraft using the pavement

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.

LIRL—Low Intensity Runway Lights.

MIRL—Medium Intensity Runway Lights.

HIRL—High Intensity Runway Lights.

RAIL—Runway Alignment Indicator Lights.

REIL—Runway End Identifier Lights.

CL—Centerline Lights.

TDZL—Touchdown Zone Lights.

ODALS—Omni Directional Approach Lighting System.

AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.

LDIN—Lead-In Lighting System.

MALS—Medium Intensity Approach Lighting System.

MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.

MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.

SALS—Short Approach Lighting System.

SALSF—Short Approach Lighting System with Sequenced Flashing Lights.

SSALS—Simplified Short Approach Lighting System.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.

ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.

ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.

SF—Sequenced Flashing Lights.

OLS—Optical Landing System.

WAVE—OFF.

NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on which they are tenants.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIL APAP on left side of runway

PNIR APAP on right side of runway

PAPI—Precision Approach Path Indicator

P2L 2-identical light units placed on left side of runway

P4L 4-identical light units placed on left side of runway

P2R 2-identical light units placed on right side of runway

P4R 4-identical light units placed on right side of runway

PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.

PSIL PVASI on left side of runway

PSIR PVASI on right side of runway

SAVASI—Simplified Abbreviated Visual Approach Slope Indicator

S2L 2-box SAVASI on left side of runway

S2R 2-box SAVASI on right side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

TRIL TRCV on left side of runway

TRIR TRCV on right side of runway

VASI—Visual Approach Slope Indicator

V2L 2-box VASI on left side of runway

V6L 6-box VASI on left side of runway

V2R 2-box VASI on right side of runway

V6R 6-box VASI on right side of runway

V4L 4-box VASI on left side of runway

V12 12-box VASI on both sides of runway

V4R 4-box VASI on right side of runway

V16 16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07-25, MALSR Rwy 07, and VASI Rwy 07-122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, "Basic Flight Information and ATC Procedures," for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"—Right traffic indicates right turns should be made on landing and takeoff for specified runway end.

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off.

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Military Service.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

<u>TYPE</u>	<u>DESCRIPTION</u>
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 MILITARY SERVICE

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24 JET AIRCRAFT STARTING UNITS (JASU)

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw

MD-4	AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire
AIR STARTING UNITS	
AM32-95	150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
AM32A-95	150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
LASS	150 +/- 5 lb/min @ 49 +/- 2 psia
MA-1A	82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
MC-1	15 cfm, 3500 psia
MC-1A	15 cfm, 3500 psia
MC-2A	15 cfm, 200 psia
MC-11	8,000 cu in cap, 4000 psig, 15 cfm
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
AGPU	AC: 115/200v, 400 cycle, 3 phase, 30 kw gen DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level
AM32A-60*	AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw
AM32A-60A	AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
AM32A-60B*	AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.	
USN JASU	
ELECTRICAL STARTING UNITS:	
NC-8A/A1	DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
NC-10A/A1/B/C	DC: 750 amp constant, 1000 amp intermittent, 28v; AC: 90 kva, 115/200v, 3 phase, 400 Hz.
AIR STARTING UNITS:	
GTC-85/GTE-85	120 lbs/min @ 45 psi.
MSU-200NAV/A/U47A-5	204 lbs/min @ 56 psia.
WELLS AIR START SYSTEM	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
NCPP-105/RCPT	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.
JASU (ARMY)	
59B2-1B	28v, 7.5 kw, 280 amp.
OTHER JASU	
ELECTRICAL STARTING UNITS (DND):	
CE12	AC 115/200v, 140 kva, 400 Hz, 3 phase
CE13	AC 115/200v, 60 kva, 400 Hz, 3 phase
CE14	AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
CE15	DC 22-35v, 500 amp continuous 1100 amp intermittent
CE16	DC 22-35v, 500 amp continuous 1100 amp intermittent soft start
AIR STARTING UNITS (DND):	
CA2	ASA 45.5 psig, 116.4 lb/min
COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)	
CEA1	AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp AIR 112.5 lb/min, 47 psig
ELECTRICAL STARTING UNITS (OTHER)	
C-26	28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
C-26-B, C-26-C	28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
E3	DC 28v/10kw
AIR STARTING UNITS (OTHER):	
A4	40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
MA-1	150 Air HP, 115 lb/min 50 psia
MA-2	250 Air HP, 150 lb/min 75 psia
CARTRIDGE:	
MXU-4A	USAF

(25) FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports button.

See legend item 14 for fuel code and description.

(26) SUPPORTING FLUIDS AND SYSTEMS—MILITARY**CODE**

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
ORXB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

(27) OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

(28) TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

29 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

30 MILITARY REMARKS

Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

31 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence (future enhancement).

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWRS—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers.

SAWRS—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

32 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on aprt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available.

FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation. (See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- b. 122.2 is assigned as a common enroute frequency.
- c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- d. 122.1 is the primary receive-only frequency at VOR's.
- e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remote facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol **Ⓡ** indicates radar approach control.


TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

VHF radio to contact the appropriate ATC facility or six "key clicks" to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol  indicates radar departure control.

CLNC DEL—Clearance Delivery.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as "Wx obsn svc 1900-0000Z+" or "other times" may be used when no specific time is given. PMSV facilities manned by forecasters are considered "Full Service". PMSV facilities manned by weather observers are listed as "Limited Service".

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter "X" indicate frequency available on request.

AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times.

Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc "times" other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700' or 1200' AGL. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS G, with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS D svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS E svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv.

NOTE: AIRSPACE SVC "TIMES" INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700' AGL (shown as magenta vignette on sectional charts) and 1200' AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700'/1200' AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
ISMLS _____	Interim Standard Microwave Landing System.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MLS _____	Microwave Landing System.
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING

MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL
500	108.10	18X	568	109.45	31Y	636	114.15	88Y
502	108.30	20X	570	109.55	32Y	638	114.25	89Y
504	108.50	22X	572	109.65	33Y	640	114.35	90Y
506	108.70	24X	574	109.75	34Y	642	114.45	91Y
508	108.90	26X	576	109.85	35Y	644	114.55	92Y
510	109.10	28X	578	109.95	36Y	646	114.65	93Y
512	109.30	30X	580	110.05	37Y	648	114.75	94Y
514	109.50	32X	582	110.15	38Y	650	114.85	95Y
516	109.70	34X	584	110.25	39Y	652	114.95	96Y
518	109.90	36X	586	110.35	40Y	654	115.05	97Y
520	110.10	38X	588	110.45	41Y	656	115.15	98Y
522	110.30	40X	590	110.55	42Y	658	115.25	99Y
524	110.50	42X	592	110.65	43Y	660	115.35	100Y
526	110.70	44X	594	110.75	44Y	662	115.45	101Y
528	110.90	46X	596	110.85	45Y	664	115.55	102Y
530	111.10	48X	598	110.95	46Y	666	115.65	103Y
532	111.30	50X	600	111.05	47Y	668	115.75	104Y
534	111.50	52X	602	111.15	48Y	670	115.85	105Y
536	111.70	54X	604	111.25	49Y	672	115.95	106Y
538	111.90	56X	606	111.35	50Y	674	116.05	107Y
540	108.05	17Y	608	111.45	51Y	676	116.15	108Y
542	108.15	18Y	610	111.55	52Y	678	116.25	109Y
544	108.25	19Y	612	111.65	53Y	680	116.35	110Y
546	108.35	20Y	614	111.75	54Y	682	116.45	111Y
548	108.45	21Y	616	111.85	55Y	684	116.55	112Y
550	108.55	22Y	618	111.95	56Y	686	116.65	113Y
552	108.65	23Y	620	113.35	80Y	688	116.75	114Y
554	108.75	24Y	622	113.45	81Y	690	116.85	115Y
556	108.85	25Y	624	113.55	82Y	692	116.95	116Y
558	108.95	26Y	626	113.65	83Y	694	117.05	117Y
560	109.05	27Y	628	113.75	84Y	696	117.15	118Y
562	109.15	28Y	630	113.85	85Y	698	117.25	119Y
564	109.25	29Y	632	113.95	86Y			
566	109.35	30Y	634	114.05	87Y			

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
2X	134.5	-	19Y	108.25	544	25X	108.80	-
2Y	134.55	-	20X	108.30	502	25Y	108.85	556
11X	135.4	-	20Y	108.35	546	26X	108.90	508
11Y	135.45	-	21X	108.40	-	26Y	108.95	558
12X	135.5	-	21Y	108.45	548	27X	109.00	-
12Y	135.55	-	22X	108.50	504	27Y	109.05	560
17X	108.00	-	22Y	108.55	550	28X	109.10	510
17Y	108.05	540	23X	108.60	-	28Y	109.15	562
18X	108.10	500	23Y	108.65	552	29X	109.20	-
18Y	108.15	542	24X	108.70	506	29Y	109.25	564
19X	108.20	-	24Y	108.75	554	30X	109.30	512

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
30Y	109.35	566	63X	133.60	-	95Y	114.85	650
31X	109.40	-	63Y	133.65	-	96X	114.90	-
31Y	109.45	568	64X	133.70	-	96Y	114.95	652
32X	109.50	514	64Y	133.75	-	97X	115.00	-
32Y	109.55	570	65X	133.80	-	97Y	115.05	654
33X	109.60	-	65Y	133.85	-	98X	115.10	-
33Y	109.65	572	66X	133.90	-	98Y	115.15	656
34X	109.70	516	66Y	133.95	-	99X	115.20	-
34Y	109.75	574	67X	134.00	-	99Y	115.25	658
35X	109.80	-	67Y	134.05	-	100X	115.30	-
35Y	109.85	576	68X	134.10	-	100Y	115.35	660
36X	109.90	518	68Y	134.15	-	101X	115.40	-
36Y	109.95	578	69X	134.20	-	101Y	115.45	662
37X	110.00	-	69Y	134.25	-	102X	115.50	-
37Y	110.05	580	70X	112.30	-	102Y	115.55	664
38X	110.10	520	70Y	112.35	-	103X	115.60	-
38Y	110.15	582	71X	112.40	-	103Y	115.65	666
39X	110.20	-	71Y	112.45	-	104X	115.70	-
39Y	110.25	584	72X	112.50	-	104Y	115.75	668
40X	110.30	522	72Y	112.55	-	105X	115.80	-
40Y	110.35	586	73X	112.60	-	105Y	115.85	670
41X	110.40	-	73Y	112.65	-	106X	115.90	-
41Y	110.45	588	74X	112.70	-	106Y	115.95	672
42X	110.50	524	74Y	112.75	-	107X	116.00	-
42Y	110.55	590	75X	112.80	-	107Y	116.05	674
43X	110.60	-	75Y	112.85	-	108X	116.10	-
43Y	110.65	592	76X	112.90	-	108Y	116.15	676
44X	110.70	526	76Y	112.95	-	109X	116.20	-
44Y	110.75	594	77X	113.00	-	109Y	116.25	678
45X	110.80	-	77Y	113.05	-	110X	116.30	-
45Y	110.85	596	78X	113.10	-	110Y	116.35	680
46X	110.90	528	78Y	113.15	-	111X	116.40	-
46Y	110.95	598	79X	113.20	-	111Y	116.45	682
47X	111.00	-	79Y	113.25	-	112X	116.50	-
47Y	111.05	600	80X	113.30	-	112Y	116.55	684
48X	111.10	530	80Y	113.35	620	113X	116.60	-
48Y	111.15	602	81X	113.40	-	113Y	116.65	686
49X	111.20	-	81Y	113.45	622	114X	116.70	-
49Y	111.25	604	82X	113.50	-	114Y	116.75	688
50X	111.30	532	82Y	113.55	624	115X	116.80	-
50Y	111.35	606	83X	113.60	-	115Y	116.85	690
51X	111.40	-	83Y	113.65	626	116X	116.90	-
51Y	111.45	608	84X	113.70	-	116Y	116.95	692
52X	111.50	534	84Y	113.75	628	117X	117.00	-
52Y	111.55	610	85X	113.80	-	117Y	117.05	694
53X	111.60	-	85Y	113.85	630	118X	117.10	-
53Y	111.65	612	86X	113.90	-	118Y	117.15	696
54X	111.70	536	86Y	113.95	632	119X	117.20	-
54Y	111.75	614	87X	114.00	-	119Y	117.25	698
55X	111.80	-	87Y	114.05	634	120X	117.30	-
55Y	111.85	616	88X	114.10	-	120Y	117.35	-
56X	111.90	538	88Y	114.15	636	121X	117.40	-
56Y	111.95	618	89X	114.20	-	121Y	117.45	-
57X	112.00	-	89Y	114.25	638	122X	117.50	-
57Y	112.05	-	90X	114.30	-	122Y	117.55	-
58X	112.10	-	90Y	114.35	640	123X	117.60	-
58Y	112.15	-	91X	114.40	-	123Y	117.65	-
59X	112.20	-	91Y	114.45	642	124X	117.70	-
59Y	112.25	-	92X	114.50	-	124Y	117.75	-
60X	133.30	-	92Y	114.55	644	125X	117.80	-
60Y	133.35	-	93X	114.60	-	125Y	117.85	-
61X	133.40	-	93Y	114.65	646	126X	117.90	-
61Y	133.45	-	94X	114.70	-	126Y	117.95	-
62X	133.50	-	94Y	114.75	648			
62Y	133.55	-	95X	114.80	-			

(35) COMM/NAV/WEATHER REMARKS:

These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

AJO

ERIC MARCUS MUNI (P01) 5 N UTC-7 N32°27.17' W112°51.69'

PHOENIX
L-5B

1458 B NOTAM FILE PRC

RWY 12-30: H3800X60 (ASPH) S-12 MIRL

RWY 12: PAPI(P2L) TCH 40'. **RWY 30:** PAPI(P2L) TCH 40'.


AIRPORT REMARKS: Unattended. Mountains in all quadrants. 4' dike 1340' from thld Rwy 30. Rwy 12-30 asph and grvl stopway 1400' NW end, 1065' stopway SE end, asph broken up and brush growing on stopways. Heavy military jet traffic in vicinity of airport. MIRL Rwy 12-30, PAPI Rwy 12 and Rwy 30 preset low ints SS-SR, to increase ints ACTIVATE-CTAF. NOTE: See Special Notices—Restricted Area R-2305, Gila Bend, Arizona Transit Information.

COMMUNICATIONS: CTAF 122.9

RCO 122.65 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE GBN.

GILA BEND (H) VORTAC 116.6 GBN Chan 113 N32°57.38' W112°40.46' 183° 31.6 NM to fld. 790/14E.



AVI SUQUILLA (See PARKER)

BAGDAD (E51) 2 NE UTC-7 N34°35.75' W113°10.21'

PHOENIX
L-5B

4183 B NOTAM FILE PRC

RWY 05-23: H4575X60 (ASPH) S-4

RWY 05: Thld dsplcd 120'. Brush.

RWY 23: Thld dsplcd 120'. Ground.


AIRPORT REMARKS: Unattended. Be alert deer on rwy. Bushes 6'-10' high along SE side of Rwy 05-23. Arpt located on mesa. Unusual air currents invof arpt, especially AER 23. 7' fuel tank 500' SW of Rwy 23 and 129' right of rwy centerline. Rotating bcn OTS indef.

COMMUNICATIONS: CTAF 122.9

RCO 122.5 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

DRAKE (H) VORTACW 114.1 DRK Chan 88 N34°42.15' W112°28.82' 246° 34.7 NM to fld. 4963/14E.



BARD N32°46.09' W114°36.17' NOTAM FILE SAN.

PHOENIX
H-41, L-5A

(H) VORTAC 116.8 BZA Chan 115 167° 6.7 NM to Yuma MCAS-Yuma Intl. 130/14E.

VORTAC unusable:

280°-300° byd 27 NM blo 3,600'

BENSON MUNI (E95) 3 NW UTC-7 N31°59.97' W110°21.48'

PHOENIX
L-5C

3829 B S2 **FUEL** 100LL, JET A NOTAM FILE PRC

RWY 10-28: H4000X75 (ASPH) S-12.5 MIRL

RWY 10: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Hill. **RWY 28:** REIL. PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended continuously. Rwy 10 has four 15' ditches both sides of rwy ends and west half of rwy with headwalls 130' south of centerline. ACTIVATE MIRL Rwy 10-28, PAPI Rwy 10 and Rwy 28-122.8.

WEATHER DATA SOURCES: AWOS-3 118.475 (520) 586-4409.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION:

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 089° 29 NM to fld. 2672/12E. HIWAS.

BISBEE DOUGLAS INTL (See DOUGLAS BISBEE)

BISBEE MUNI (P04) 5 SE UTC-7 N31°21.84' W109°52.99'
 4780 B S2 FUEL 100LL TPA-5780(1000) NOTAM FILE PRC
 RWY 17-35: H5929X60 (ASPH) S-12 MIRL
 RWY 17: PAPI(P2L). Brush. RWY 35: PAPI(P2L). Brush.
 RWY 02-20: 2650X110 (DIRT)
 RWY 20: Brush.

PHOENIX
 H-4J, L-5C

AIRPORT REMARKS: Attended 1500-0000Z. Scattered weeds in twy near end of Rwy 35. For MIRL Rwy 17-35 key 122.8 3 times.

COMMUNICATIONS: CTAF/UNICOM 122.8

BISBEE RCO 122.4 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DUG. VHF/DF ctc FSS. VHF/DF OTS indef.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' 233° 15.8 NM to fld. 4160/13E.

BUCKEYE MUNI (BXX) 6 NW UTC-7 N33°25.23' W112°41.17'
 1033 B S2 FUEL 100LL, JET A TPA-2009(976) NOTAM FILE PRC
 RWY 17-35: H5500X75 (ASPH) S-12.5 MIRL

PHOENIX
 H-4I, L-5B, A

RWY 17: PAPI(P2L)-GA 3.1° TCH 40'. Rgt tfc.

RWY 35: PAPI(P4L)-GA 3.0°. Fence.

AIRPORT REMARKS: Attended Mon-Thu 1400-0100Z. 100LL 24 hrs self svc JET A avbl Mon-Thu 1400-0100Z. Parachute Jumping. Wildlife on and invof arpt. Low level jet tfc vicinity of arpt. ACTIVATE MIRL Rwy 17-35-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.625 (623) 386-7627.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 110.6T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

(L) VORTAC 110.6 BXX Chan 43 N33°27.21' W112°49.48'
 092° 7.2 NM to fld. 1060/14E.

VOR portion unusable:


060°-075° byd 28 NM blo 4,000'

230°-260° byd 35 NM blo 5,000'

280°-320° byd 35 NM blo 7,000'

320°-020° byd 37 NM blo 6,000'

DME unusable 020°-072° byd 28 NM blo 8,000'

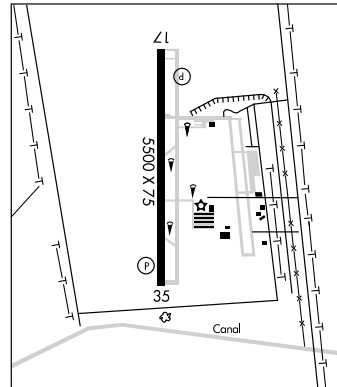

BULLHEAD CITY

EAGLE AIRPARK (A09) 12S UTC-7 N34°53.29' W114°37.00'

PHOENIX
 L-7E

485 B S2 FUEL 100LL, JET A OX 4 NOTAM FILE PRC

RWY 17-35: H4800X50 (ASPH)

RWY 17: Thld dsplcd 600'. Bldg. Rgt tfc.

RWY 35: Thld dsplcd 150'. Road.

AIRPORT REMARKS: Attended 1500-2300Z. Parachute Jumping. Extensive agricultural spraying ops invof arpt. Rwy 17 and Rwy 35 dsplcd thld arrows NSTD size and type.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96' W114°28.45' 301° 10.2 NM to fld. 620/15E.

HIWAS.

LAUGHLIN/BULLHEAD INTL (IFP) 1 N UTC-7 N35°09.36' W114°33.57'

PHOENIX

701 B S6 FUEL 100LL, JET A OX 1, 2 TPA—See Remarks Class I, ARFF Index A
 NOTAM FILE IFP

H-41, L-7E
 IAP, AD

RWY 16-34: H7500X150 (ASPH) S-75, D-200, DT-400 MIRL 1.0% up S

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 46'. Pole. Rgt tfc.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Thld dsplcd 500'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 16: TORA-7000 TODA-7000 ASDA-7000 LDA-7500

RWY 34: TORA-7500 TODA-7500 ASDA-7500 LDA-7000

AIRPORT REMARKS: Attended continuously. For services and fuel 1300-0700Z ctc frequency 122.85, between 0700-1300Z services and fuel not avbl. Mountains NW, NE, E and SE. TPA for light acft 1700(999), TPA for high performance acft 2200(1499).
 ACTIVATE MIRL Rwy 16-34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.825 (928) 754-4462. Plus precipitation.

COMMUNICATIONS: CTAF 123.9

Ⓡ LOS ANGELES CENTER APP/DEP CON 134.65

L.A. CENTER CLNC DEL 118.25 (when twr clsd)


BULLHEAD TOWER 123.9 (1500-0100Z) GND CON 118.25

AIRSPACE: CLASS D svc 1500-0100Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96'

W114°28.45' 335° 23.7 NM to fld. 620/15E. HIWAS.

**SUN VALLEY** (A2Ø) 7S UTC-7 N35°00.34' W114°33.90'

PHOENIX

725 S2 FUEL 100LL NOTAM FILE PRC Not insp.

L-7E

RWY 18-36: H3700X42 (ASPH) LIRL

RWY 18: Road. RWY 36: VASI(V2L). Rgt tfc.

AIRPORT REMARKS: Attended 1400-0100Z. Glider ops on west side of rwy. Shallow ditch 25' in length located 40' right of Rwy 36.


ACTIVATE LIRL Rwy 18-36 and VASI Rwy 36—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.975

RADIO AIDS TO NAVIGATION: NOTAM FILE EED.

NEEDLES (H) VORTAC 115.2 EED Chan 99 N34°45.96'

W114°28.45' 328° 15.0 NM to fld. 620/15E. HIWAS.



CASA GRANDE MUNI (CGZ) 5 N UTC-7 N32°57.29' W111°46.01'

1464 B S4 FUEL 100LL, JET A TPA-2502(1038) NOTAM FILE CGZ

RWY 05-23: H5200X100 (ASPH) S-18.5, D-65, ST-82 MIRL 0.3% up NE

RWY 05: MALSR. VASI(V2R)—GA 3.0° TCH 41'. Road.

RWY 23: VASI(V2L)—GA 3.0° TCH 38'. Road. Rgt tfc.

AIRPORT REMARKS: Attended 1430-0030Z. Self service fueling avbl. Parachute Jumping. Service road within primary surface. Holdlines on all twys connecting to the rwy are set at 280' from rwy centerline. Acft taxiing on Twy B be alert to passing acft holding on the connecting twys. ACTIVATE MALSR Rwy 05—CTAF.

WEATHER DATA SOURCES: AWOS-3 132.175 (520) 836-3392.**COMMUNICATIONS:** CTAF/UNICOM 122.7® **ALBUQUERQUE CENTER APP/DEP CON 125.4****RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**STANFIELD (H) VORTAC** 114.8 TFD Chan 95 N32°53.15'


W111°54.52' 048° 8.3 NM to fld. 1316/12E.

ILS 111.15 I—CGZ Rwy 05. ILS monitored Mon-Fri 1500-0000Z and Sat 1700-1900Z. GS unusable for couple apch blo 1625' MSL.

PHOENIX

H-41, L-5B, A

IAP

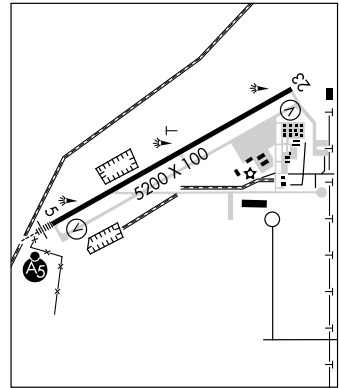**CHANDLER****CHANDLER MUNI** (CHD) 3 SE UTC-7 N33°16.15' W111°48.67'

1243 B S4 FUEL 100LL, JET A OX 3, 4 TPA-2200(957) NOTAM FILE CHD

RWY 04R-22L: H4870X75 (ASPH) S-30 MIRL

RWY 04R: REIL. PAPI(P4L)—GA 3.0° TCH 37'. Rgt tfc.

RWY 22L: REIL. PAPI(P4L)—GA 3.0° TCH 42'.

RWY 04L-22R: H4401X75 (ASPH) S-30 MIRL

RWY 04L: PAPI(P4L)—GA 3.5° TCH 40'. Tree.

RWY 22R: PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1200-0000Z, Sat-Sun 1200-2230Z. Large birds soar all year. Wildlife occasionally crossing rwys and twys. Antenna 85' AGL located ¼ mile north of Rwy 22R. P-line mono-poles running N to S approximately 1.5 miles W of arpt, height 135' AGL. No obstruction lighting on structures. P-line mono-poles running E to W approximately 1 mile S of arpt, height 135' AGL. Aerobatic practice areas approximately 5 miles SE of arpt from surface to 3500' AGL. Hot air balloon ops 1 mile W of arpt. Avoid overflight of high school 2 NM SW of arpt. Rwy 22L REIL OTS indef. When twr clsd MRL Rwy 04R-22L and Rwy 04L-22R, PAPI Rwy 04R, Rwy 22L, Rwy 04L and Rwy 22R, REIL Rwy 04R and Rwy 22L and twy lgts on until 0500Z, after 0500Z ACTIVATE-126.1.

WEATHER DATA SOURCES: AWOS-3 128.325 when twr clsd. (480) 814-9952.

COMMUNICATIONS: CTAF 126.1 ATIS 128.325 UNICOM 122.95® **PHOENIX APP/DEP CON 123.7****TOWER** 133.1 Arr S&E, Dep Rwy 04R-22L 126.1 Arr N&W, Dep Rwy 04L-22R. (1300-0400Z) **GND CON** 124.4**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE IWA.


WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' 243° 8.3 NM to fld. 1370/13E. HIWAS.

NDB (MHW) 407 CHD N33°15.99' W111°48.47' at fld. NOTAM FILE PRC. Unusable 020°-070° byd 15 NM.

• • • • •
HELIPAD H1: H100X100 (CONC)**PHOENIX**

L-5B, A

IAP, AD

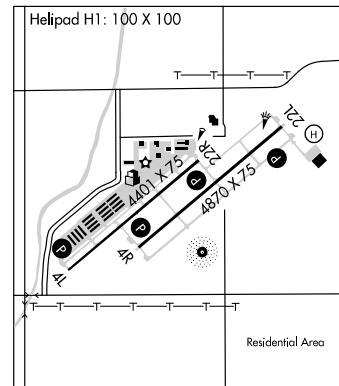

STELLAR AIRPARK (P19) 3 W UTC-7 N33°17.93' W111°54.93'

PHOENIX

1177 B S2 FUEL 100LL TPA-2000(823) NOTAM FILE PRC

L-5B, A

RWY 17-35: H3913X60 (ASPH) MIRL

IAP

RWY 17: REIL. VASI(V4L)—GA 3.0° TCH 25'. Tree.

RWY 35: REIL. Thld dspcd 208'.

AIRPORT REMARKS: Unattended. For fuel and tiedown information ctc FBO at (480) 961-9050. Be alert to numerous no-radio aircraft invof arpt. Training acft touch and go landing prohibited. Helicopter training prohibited. Commercial and student training ops by permit only. Practice instrument approaches in VFR conditions not authorized. Calm wind Rwy 17. Parallel twy west of Rwy 17-35 restricted; homeowners use only, all other traffic use parallel twy east of Rwy 17/35. Avoid over flight of noise sensitive areas west of Rwy 17-35 and north of arpt. Flood irrigation between rwy and twy with standing water up to 1' depth on irregular schedule. ACTIVATE MIRL Rwy 17-35—CTAF. Ldg fee charged for all commercial ops.


COMMUNICATIONS: CTAF 122.9

⑧ PHOENIX APP/DEP CON 123.7

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98'

W111°58.21' 149° 8.5 NM to fld. 1182/12E. HIWAS.

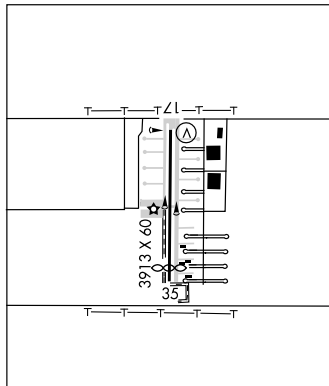**CHINLE MUNI** (E91) 3 SW UTC-7 N36°06.65' W109°34.53'

DENVER

5547 B NOTAM FILE PRC

H-41, L-8H

RWY 18-36: H6900X60 (ASPH) S-12.5 MIRL

RWY 18: PAPI(P2L).

RWY 36: PAPI(P2L).

AIRPORT REMARKS: Unattended. Call Navajo Hospital Security at 928-283-2842 to start generator for beacon and rwy lgtg at night and during inclement weather. Drive time to arpt is 10 minutes.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE FMN.

GALLUP (H) VORTAC 115.1 GUP Chan 98 N35°28.56' W108°52.36' 304° 51.2 NM to fld. 7053/14E.

CIBECUE (Z95) 4 SE UTC-7 N34°00.20' W110°26.65'

PHOENIX

5037 NOTAM FILE PRC

RWY 07-25: 4200X100 (GRVL)

RWY 25: Road.

AIRPORT REMARKS: Unattended. Daytime use only. Firefighting aircraft invof arpt April-September. Mountain Ridges N and E of arpt. Small hills either side of Rwy 07 and S side of Rwy 25. Preferred landing Rwy 07 and tkf Rwy 25.

COMMUNICATIONS: CTAF 122.9**CLIFTON/MORENCI****GREENLEE CO** (CFT) 8 SE UTC-7 N32°57.42' W109°12.67'

PHOENIX

3798 B NOTAM FILE PRC

L-5D

RWY 07-25: H4978X75 (ASPH) S-21 MIRL

RWY 07: PAPI(P2L).

RWY 25: PAPI(P2L).


AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 07-25—CTAF.

PAPI Rwy 07 and Rwy 25 opr continuously.

WEATHER DATA SOURCES: AWOS-3 119.05 (928) 687-1116.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE ABQ.

SILVER CITY (L) VORTAC 110.8 SVC Chan 45 N32°38.26'

W108°09.66' 277° 56.4 NM to fld. 5420/13E.

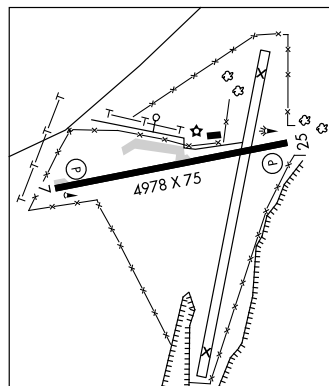

COCHISE CO (See WILLCOX)

COCHISE COLLEGE (See DOUGLAS)

COLORADO CITY MUNI	(AZC)	3 SW	UTC-7	N36°57.60' W113°00.83'	LA
--------------------	-------	------	-------	------------------------	----

LAS VEGAS

4874 B S4 FUEL 100LL, JET A OX 3 TPA—5722(848) NOTAM FILE PRC

H-4I, L-9C

RWY 11-29: H6300X75 (ASPH) S-30 MIRL

IAP

RWY 11: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 29: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 02-20: H5099X60 (ASPH) S-12.5 MIRL 0.7% up NE

AIRPORT REMARKS: Attended Mon-Sat 1600-0100Z. 2000' mountains north and northeast of arpt. ACTIVATE MIRL Rwy 11-29, PAPI Rwy 11 and Rwy 29 and REIL Rwy 11 and Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (928) 875-8045.

COMMUNICATIONS: CTAF/UNICOM 122.7

® LOS ANGELES CENTER APP/DEP CON 124.2


RADIO AIDS TO NAVIGATION: NOTAM FILE CDC.

ST GEORGE (T) VORW/DME 109.8 OZN Chan 35 N37°05.28'

W113°35.51' 090° 28.8 NM to fld. 2901/15E.

NDB (MHW) 403 **AZC** **N36°57.59' W113°00.55'** **at fld.**

NOTAM FILE PRC. Unusable 330°–100° byd 15 NM blo 9,200'.



COOLIDGE MUNI (PØ8) 5 SE UTC-7 N32°56.16' W111°25.59'

PHOENIX

1574 B FUEL 100LL, JET A TPA—2574(1000) NOTAM FILE PRC

H-4I, L-5C, A

RWY 05-23: H5528X150 (ASPH)	S-80, D-115, DT-210	MIRL	0.5% up NE
------------------------------------	---------------------	------	------------

IAP

RWY 05: VASI(V2L)—GA 3.0° TCH 25'. Thld dsplcd 50'. Tree.

RWY 23: VASI(V2L)—GA 3.0° TCH 28'. Rgt tfc.

RWY 17-35: H3861X75 (ASPH) S-17

RWY 17: Brush. Rgt tfc. RWY 35: Brush.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Self fueling with credit card. Parachute Jumping. Drop zone located northeast Rwy 35. Aerobatic box located .5 NM east of aprt surface to 4500' AGL. Livestock on and inofv aprt. Rwy 17-35 has several large cracks. Large military transports in vicinity of aprt. Rwy 05-23 reflectors used to mark runway. ACTIVATE MIRL Rwy 05-23-CTAF.


COMMUNICATIONS: CTAF/UNICOM 123.075

ALBUQUERQUE CENTER APP/DEP CON 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

STANFIELD (H) VORTAC 114.8 TFD Chan 95 N32°53.15'

W111°54.52' 071° 24.5 NM to fld. 1316/12E.

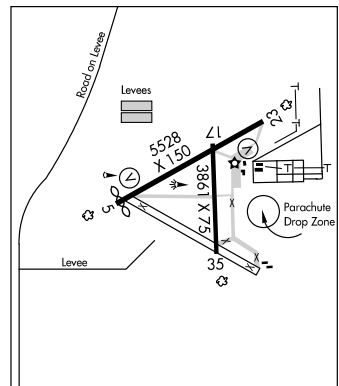

COTTONWOOD (P52) 1 SW UTC-7 N34°43.80' W112°02.11'
 3550 B S2 **FUEL** 100LL TPA—See Remarks NOTAM FILE PRC
RWY 14-32: H4250X75 (ASPH) S-4 MIRL

RWY 14: REIL. PAPI(2PL). Brush.
RWY 32: REIL. PAPI(2PL)—GA 3.0°. Brush. Rgt tfc.


AIRPORT REMARKS: Attended 1500-0000Z. For arpt attendant call 928-300-9584. Fuel avbl 24 hrs with major credit card. Emergency phone 928-634-4246. To contact FBO after hrs call 928-634-5517 or 928-300-8331/9584. Parachute Jumping. Hang gliders invof arpt. No touch and go 30 minutes before SS until 30 minutes after dawn. Acft departing Rwy 14 maintain heading for 1 NM byd departure end and 500' AGL prior to turning. Departing Rwy 32 maintain rwy heading for .6 NM and 500' AGL prior to turning. Check CTAF for local flight training restrictions. Rwy 32 designated calm wind rwy. TPA helicopter 4050(500), single 4350(800), multi 4550(1000), turbine 5050(1500). ACTIVATE MIRL Rwy 14-32, PAPI Rwy 14 and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.7

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

DRAKE (H) VORTACW 114.1 DRK Chan 88 N34°42.15' W112°28.82' 072° 22.1 NM to fld. 4963/14E.



PHOENIX

L-8F

DAVIS MONTHAN AFB (DMA)(KDMA) AF 2 SW UTC-7 N32°09.99' W110°52.99'

2704 B TPA—See Remarks NOTAM FILE DMA Not insp.

RWY 12-30: H13643X200 (PEM) PCN 75/R/C/W/T HIRL

RWY 12: REIL. PAPI(P4L). 0.8% up. **RWY 30:** ALSF1. PAPI(P4L). Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 12 HOOK BAK-12A(B) (EOR) HOOK BAK-12A(B) (1200')

HOOK BAK-12A(B) (1198') HOOK BAK-12A(B) (EOR) RWY 30

MILITARY SERVICE: LGT All rwy thld lgt gated. **A-GEAR** All BAK 12A extended. **FUEL** J8. Transient acft can expect up to 2 hr delay for refuel. **FLUID** SP PRESAIR LHGX LOX OIL O-148-156 JOAP; W-72 hr prior notice rqr

MILITARY REMARKS: See FLIP AP/1 Supplementary Arpt Remark. **RSTD** PPR all acft, ctc Base OPS DSN

228-4507/4315, C520-228-4507/4315. No Vertical and Short Take-off and Landing aircraft apch ldg. Airfield clsd 1300-2100Z (except to active scrambles) last Sat monthly. Transient acft are allowed 1 apch to a full stop, between 1430Z and official SS, or if Davis-Monthan is not the final destination, may execute 1 apch and dep the Davis-Monthan pat. For multiple apch or apch outside those hrs. 355 OG/CC approval rqr. Reg approval 24 hrs in advance through Davis-Monthan base ops. All acft inbound with DV code 6 or higher and/or space A passenger ctc PTD at least 30 min prior to arrival to confirm block time. **CAUTION** Coyotes, burrowing owls and javelinas found occasionally on both sides of rwy. **TFC PAT** TPA—Conventional 3700(996), overhead 5000(2296) until 4 DME then 4200(1496). No overhead tfc pattern authorized except to permanent base assigned acft SS-SR. Maximum speed in overhead pat is 300 Kts Indicated Airspeed. Do not exceed 3700' until dep end of rwy. Hi alt wx balloon released 5 mile final Rwy 12 at 1100Z and 2300Z daily. **NS ABTMT** Air Combat Command quiet hour policy in eff 0530-1300Z. Max performance climbs not authorized. Discontinue afterburner as soon as safely possible. Heavy acft expect Rwy 12 dep unless precluded by acft limitations. **MISC** First 2700' of Rwy 12 and first 2445' of Rwy 30 are concrete. Mid 8500' of Rwy 12-30 is asphalt. Standard USAF reduced same rwy separation applied exc 6000' between C130 acft. ATC personnel will notify wx of change as part of Cooperative Weather Watch (CWW). Cooperative Weather Watch will include but is not ltd to twr and sector visibility and significant pilot report information to be included in the obsn/terminal or alternate forecast. Primary wx sensor is FMQ-19 producing automated obsn. Base wx avbl 24hr during duty week, clsd weekend and federal hol, DSN 228-6014/3254, fax DSN 228-3255. Wx briefings avbl 24hr from 25 OWS at DSN 228-6598/6599, 2 hr notice rqr for timely brief. FMQ-19 automated wx obsn system avbl 24 hr may be accessed thru DSN 228-0487 C520-228-0487. All transient aircrews shall store all classified materials at Wing Command Post (building 2300).

COMMUNICATIONS: SFA ATIS 270.1 (1300-0530Z) PTD 372.2

② **TUSCON APP/DEP CON** 119.4 318.1 (Rwy 12 286°-089°, Rwy 30 066°-274°) 125.1 269.55 (Rwy 12 090°-285°, Rwy 30 275°-065°)

TOWER 118.85 253.5 **GND CON** 121.8 275.8 **CLNC DEL** 121.8 275.8

COMD POST (RAYMOND 8) 381.3 **PMSV METRO** 239.8 Alternate PMSV METRO LUF 267.4

AIRSPACE: CLASS C svc continuous ctc **APP CON.**

RADIO AIDS TO NAVIGATION: NOTAM FILE DMA.

(L) **TACAN** Chan 123 DMA (117.6) N32°09.60' W110°52.85' at fld. 2663/12E. No NOTAM MP Wed 1200-1400Z. Unusable 060°-090° byd 25 NM blo 17000' 330°-030° byd 25 NM blo 17000'

ILS 109.3 I-DMA Rwy 30. Back course unusable. No NOTAM MP Tue, Thu 1400-1600Z.

PAR No NOTAM MP 1100-1300Z. Weekdays 1900-0500Z or termination of A10 flying (contact scheduling for times at DSN-228-5777).

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.


DOUGLAS**COCHISE COLLEGE** (PØ3) 7 W UTC-7 N31°22.27' W109°41.42'

4124 B FUEL 100LL NOTAM FILE PRC

RWY 05-23: H5303X72 (ASPH) LIRL

RWY 05: PAPI(P4L)—GA 3.0°. Road.

RWY 23: PAPI(P4L)—GA 3.0°. Thld dspcd 500'. Road.

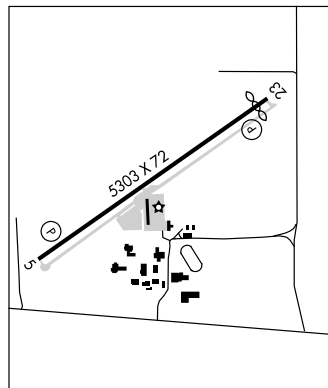AIRPORT REMARKS: Attended Mon-Fri 1345-0030Z. Unmanned aerial vehicle operating on and in vicinity of arpt.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE DUG.**DOUGLAS (L) VORTACW** 108.8 DUG Chan 25 N31°28.36' W109°36.12' 204° 7.6 NM to fld. 4160/13E.**PHOENIX**
H-4J, L-5D**DOUGLAS MUNI** (DGL) 2 E UTC-7 N31°20.56' W109°30.39'

4173 B S2 FUEL 100LL, JET A AOE NOTAM FILE PRC

RWY 03-21: H5760X75 (ASPH) MIRL

RWY 03: PAPI(P4L)—GA 3.0° TCH 40'. Road. Rgt tfc.

RWY 21: PAPI(P4L)—GA 4.0° TCH 50'.

RWY 18-36: 4095X100 (DIRT)

RWY 18: Bush. RWY 36: Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1400-0100Z, 24 hr 100LL avbl with major credit card. For service after hours call 520-227-0969. Rwy 21 50' twr 1350' from thld 550' left lgtd. Mountains 1½ miles east. Rwy 18-36 brush on both sides 70' from centerline full length of rwy. Rwy 18-36 surface rough and rutted. Rwy 18-36 +3' bump 300' from Rwy 18 thld. Rwy 21 PAPI OTS indef. NOTE: See Special Notices—U.S. Special Customs Requirement.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.6 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DUG.**(L) VORTACW** 108.8 DUG Chan 25 N31°28.36' W109°36.12' 135° 9.2 NM to fld. 4160/13E.

DME unusable:

045°-065° beyond 26 NM below 10,000'

065°-095° beyond 28 NM below 9,500'

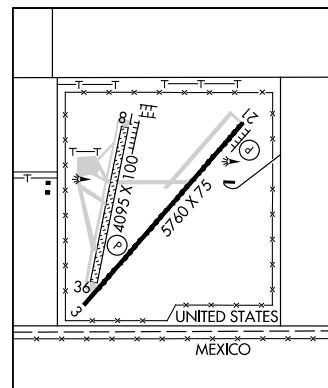PHOENIX
H-4J, L-5D

355°-010° beyond 35 NM below 11,300'

DOUGLAS BISBEE**BISBEE DOUGLAS INTL** (DUG) 8 NW UTC-7 N31°28.14' W109°36.22'

PHOENIX

4154 B S2 FUEL 100LL, JET A AOE NOTAM FILE DUG

H-41, L-5D

RWY 17-35: H7311X100 (ASPH-RFSC) S-30, D-160, ST-175, DT-250 MIRL 0.6% up N

IAP

RWY 17: VASI(V2L).

RWY 08-26: H5000X75 (ASPH) S-12.5 MIRL 0.6% up E

RWY 08: Brush.

AIRPORT REMARKS: Attended 1430-2330Z. Fuel svc fee Mon-Fri 0300-1430Z, all day Sat-Sun, phone 520-508-3606 or 520-227-3369. Rwy 08-26 VFR ops only, daylight use only. Rwy 17-35 rfsc 100' wide. ACTIVATE MIRL Rwy 17-35 and VASI Rwy 17—CTAF. Flight Notification Service (ADCUS) available. NOTE: See Special Notices—U.S. Special Customs Requirement.


WEATHER DATA SOURCES: ASOS 119.275 (520) 364-7208.**COMMUNICATIONS:** CTAF/UNICOM 123.0

BISBEE RCO 122.4 (PRESCOTT RADIO)

DOUGLAS RCO 122.6 (PRESCOTT RADIO)

AIRSPACE: CLASS E svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE DUG.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' at fld. 4160/13E.

**DRAGOO** N31°35.14' W110°20.66' NOTAM FILE FHU.

PHOENIX

NDB (MHW) 410 DAO at Sierra Vista Muni-Libby AAF. Unmonitored when twr closed.

L-5C

DRAKE N34°42.15' W112°28.82' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 114.1 DRK Chan 88 120° 4.2 NM to Ernest A. Love Fld. 4963/14E.

H-41, L-8F

VORTAC unusable.

055°-080°beyond 29 NM below 9,300'

185°-195°beyond 23 NM below 9,100'

125°-140°beyond 35 NM below 8,500'

195°-220°beyond 13 NM below 9,100'

140°-160°beyond 30 NM below 9,500'

220°-235°beyond 25 NM below 9,100'

160°-175°beyond 35 NM below 9,500'

265°-275°beyond 30 NM below 8,800'

175°-185°beyond 30 NM below 9,500'

EAGLE AIRPARK (See BULLHEAD CITY)**ELOY MUNI** (E60) 3 NW UTC-7 N32°48.41' W111°35.20'

PHOENIX

1513 B FUEL 100LL, JET A TPA-2313(800) NOTAM FILE PRC

L-5B, A

RWY 02-20: H3900X75 (ASPH) MIRL


RWY 02: REIL. VASI(V2L). Tree.

RWY 20: REIL. VASI(V2L). Rgt tfc.

AIRPORT REMARKS: Attended 1400-2300Z. Self-fueling avbl. Parachute Jumping. Seasonal crop dusting operations. Apch from W and do not overfly arpt, extremely heavy parachute jumping activity over E side of arpt SR-SS. When wind 10 knots or less dep Rwy 02 and land Rwy 20. Rotating bcn OTS indef. REIL Rwy 02 and Rwy 20 OTS indef. VASI Rwy 02 and Rwy 20 OTS indef. ACTIVATE MIRL Rwy 02-20—CTAF. VASI Rwy 02 and Rwy 20 and REIL Rwy 02 and Rwy 20 opr continuously.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

STANFIELD (H) VORTAC 114.8 TFD Chan 95 N32°53.15' W111°54.52' 094° 17.0 NM to fld. 1316/12E.

**ERIC MARCUS MUNI** (See AJO)**ERNEST A. LOVE FLD** (See PRESCOTT)**ESTRELLA SAILPORT** (See MARICOPA)

FALCON FLD (See MESA)**FLAGSTAFF PULLIAM** (FLG) 4 S UTC-7 N35°08.42' W111°40.16'

PHOENIX

7014 B S4 **FUEL** 100LL, JET A OX 2 TPA—See Remarks Class I, ARFF Index A

H-41, L-86

NOTAM FILE FLG

IAP, AD

Rwy 03-21: H8800X150 (ASPH-PFC) S-30, D-95, ST-120, DT-140 HIRL**Rwy 03:** VASI(V4L)—GA 3.0° TCH 42'.**Rwy 21:** MALS. PAPI(P4L)—GA 3.0° TCH 51'. Thld dsplcd 1800'.**RUNWAY DECLARED DISTANCE INFORMATION****Rwy 03:** TORA-8800 TODA-8800 ASDA-8800 LDA-8800**Rwy 21:** TORA-8800 TODA-8800 ASDA-8800 LDA-7000**AIRPORT REMARKS:** Attended 1300-0600Z. Fuel self-service 24 hrs.

Rwy 03-21 windshear and turbulence at both ends of rwy when surface winds exceed 10 knots. CLOSED to air carrier ops with more than 30 passenger seats except 24 hr PPR 928-556-1234.

Snow removal equipment may be on rwy. Equipment has 2-way radio and monitors frequency 134.55 when twr clsd. Arpt may be CLOSED during snow removal. For current snow removal equipment activity ctc 134.55. Calm wind conditions use Rwy 21.

Noise Abatement: Avoid overflight of village 3 miles south.

TPA-8003(989) Conventional acft, 7503(489) Helicopter,

8503(1489) High Performance. When twr closed ACTIVATE HIRL

Rwy 03-21 and MALS Rwy 21—CTAF. VASI Rwy 03 and PAPI Rwy 21 opr continuously.

WEATHER DATA SOURCES: ASOS (928) 779-2439.**COMMUNICATIONS:** CTAF 134.55 ATIS 125.8 UNICOM 122.95**RCO** 123.65R 113.85T (PRESCOTT RADIO)**KAYENTA RCO** 122.45 (PRESCOTT RADIO)**MINGUS MOUNTAIN RCO** 122.3 (PRESCOTT RADIO)Ⓡ **ALBUQUERQUE CENTER APP/DEP CON** 124.5**TOWER** 134.55 (April 1-Sep 30 1300-0400Z Oct 1-Mar 31 1400-0200Z) **GND CON** 121.9**AIRSPACE:** CLASS D svc Apr 1-Sep 30 1300-0400Z Oct 1-Mar 31 1400-0200Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE FLG.(H) **VOR/DME** 113.85 FLG Chan 85(Y) N35°08.83' W111°40.45' at fld. 7026/14E.


DME unusable:

230°-255° byd 20 NM blo 15,000'

VOR/DME unusable:

335°-030° byd 19 NM blo 24,000'

ILS 110.5 I-FLG Rwy 21. Glideslope unusable byd 5° left and right of LOC course. LOC unusable inside of FLG 0.8 DME

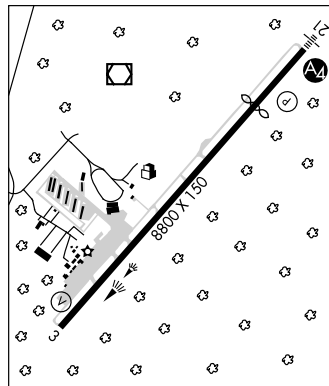**FLYING J RANCH** (See PIMA)**FORT HUACHUCA** N31°35.13' W110°20.34' NOTAM FILE FHU.

PHOENIX

(T) **TACAN** Chan 53 ARH (111.6) at Sierra Vista Muni—Libby AAF. 4659/12E. Unmonitored when twr clsd, no NOTAM MP 1st Wed of month 1500-2300Z. TACAN unusable 105°-250° byd 10 NM, 250°-300° byd 20 NM.

H-41, L-5C

FORT HUACHUCA—SIERRA VISTA**SIERRA VISTA MUNI—LIBBY AAF**

(FORT HUACHUCA) (FHU)(KFHU) CIV/MIL 3 N UTC-7

PHOENIX

H-4J, L-5C
IAP, DIAP, AD

N31°35.31' W110°20.66'

4719 B FUEL 100, JET A TPA—See Remarks Class III, ARFF Index A NOTAM FILE FHU

RWY 08-26: H12001X150 (CONC) S-70, D-200, DT-400, DDT-700

PCN 54 R/B/W/T HIRL 1.0% up W

RWY 08: PAPI(P4L)—GA 3.0° TCH 26'.**RWY 26:** PAPI(P4L)—GA 3.0° Rgt tfc.**RWY 12-30:** H5366X100 (ASPH-CONC) S-46, D-106, DT-137,

DDT-172 PCN 24 F/A/W/T MIRL

RWY 12: PAPI(P4L)—GA 3.0° TCH 51'.**RWY 30:** PAPI(P2R)—GA 3.0° TCH 51' Rgt tfc.**RWY 03-21:** H4285X75 (ASPH-CONC) PCN 22 F/A/W/T

2.0% up SW MIRL

RWY 03: Thld dsplcd 1253'. **RWY 21:** Rgt tfc.**MILITARY SERVICES:** FUEL J8 (NC-100, A). Petrol, oils and lubricants avbl

Mon-Fri 1330-0100Z, exc holidays, other times 24 hr prior

notice. DSN 879-2860/62. Petrol, oils and lubricants svc require

crew member attend to specify fuel/oil requirement. Fuel limited

to 6000 gallons. **TRAN ALERT** Tran acft, ctc Libby ATC or Base OPS

to coordinate parking.

AIRPORT REMARKS: Attended Mon-Sun 1400-0000Z. Fuel available

1400-0000Z 7 days/week, after hrs call 520-803-6439 (svc

fee). Joint use civil-military arpt; extensive military jet ops weekdays. Bird hazard invof all rwys on tkfs and

apchs. Deer on and invof all rwys and twys especially at night. When Class D airspace in effect unmanned aerial

vehicles opr surface to 7000' MSL. Bird hazard exists all rwys. Civilian manned flights not authorized during

arrival/departure/overflights of unmanned acft. Expect windshear on apch to all rwys. Civilian acft PPR to enter

military ramp. Non scheduled arriving acft requiring assistance, ctc GOC 533-2291/2292. TPA—fixed wing acft

north and rotary wing south traffic pattern, altitude fixed wing reciprocating 5700(981), rotary wing 5500(781),

fixed wing turboprop/Jet 6200(1481). Twy G and Twy J limited to single wheel acft maximum 33,000 lbs, Twy K

limited to single wheel acft maximum 50,000 lbs. Twy D and acft apron on NW side limited to dual wheels acft

maximum 100,000 lbs. Circling not authorized South of Rwy 08 and Rwy 30. **ACTIVATE MIRL** Rwy 03-21 andRwy 12-30, HIRL Rwy 08-26, PAPI Rwy 08, Rwy 26, Rwy 12, Rwy 30 and Perimeter lgt H1—CTAF. **NOTE:** See

Special Notices—Tethered Areostat Radar System (TARS).

MILITARY REMARKS: Opr Mon-Fri 1000-2359Z, except holidays, other times 72 hr PPR DSN 879-2860/2862,C520-538-2860/2862. See FLIP AP/1 Supplementary Arpt Remarks. **RSTD** 24 hr PPR for all transient military

acft. Civilian acft PPR to enter military ramp. Twy G and Twy J limited to single wheel acft maximum 33,000 lbs,

Twy K limited to single wheel acft maximum 50,000 lbs. Circling not authorized South of Rwy 08 and Rwy 30.

CAUTION Expect wind shear on apch to all rwy; arpt SW wind may not be representative of wind on final apch.

When Class D airspace in effect unmanned aerial vehicles (UAV) operate sfc to 7000' MSL. Extensive military jet

ops weekdays. **CSTMS/AG/IMG** Avbl with 72 hr prior notice for US military or DoD contract acft only. **MISC** All

transient and remain overnight acft using mil side must sign in at base ops prior to dep flight line. 72 hr PPR for

use of assault strip located 5 NM NE. Non-scheduled arriving acft require assistance ctc EOC 533-2291. All acft

using military transient parking sign in at base ops prior to leaving flight line. Wx observation/forecast Mon-Fri


1400-0600Z, except holidays, ASOS other times. Libby wx avbl on 122.95. DSN 879-2865/2859

C520-538-2865/2859. Remote briefing svc avbl 25th operational weather squadron Davis-Monthan AFB DSN

228-6598/6599/6588, call C520-228-6598/6599/6588, and C1-877-451-8367, ext 1, or

HTTPS://25OWS.DM.AF.MIL. A Libby Base OPS opr Mon-Fri 1400-2359Z, except holidays other times 72 hr

PPR. DSN 879-2860/2862, C520-538-2860/2862.

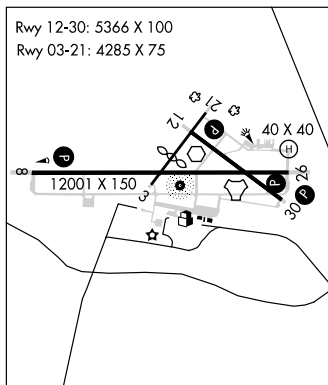WEATHER DATA SOURCES: ASOS 119.675 (520) 459-7316**COMMUNICATIONS:** CTAF 124.95 ATIS 134.75 265.7 UNICOM 122.95① **LIBBY AAF GCA APP/DEP CON** 127.05 254.35 (Mon-Fri 1400-0600Z) other times ctc① **ALBUQUERQUE CENTER APP/DEP CON** 134.45 327.15**LIBBY TOWER** 124.95 284.75 (Mon-Fri 1400-0600Z) other times ctc ALBUQUERQUE CENTER.**GND CON** 121.7 268.7**LIBBY OPS** 122.95**AIRSPACE:** CLASS D svc Mon-Fri 1400-0600Z, or other times by advanced NOTAM, other times Class G.**CONTINUED ON NEXT PAGE**

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE FHU.

LIBBY (T) VOR 113.6 FHU N31°35.38' W110°21.30' at fld. Unmonitored when twr clsd. No NOTAM MP 2nd Tue of month 1500–1900Z.

DOUGLAS (L) VORTACW 108.8 DUG Chan 25 N31°28.36' W109°36.12' 268° 38.7 NM to fld. 4160/13E. NOTAM FILE DUG.

FORT HUACHUCA (T) TACAN Chan 53 ARH (111.6) N31°35.13' W110°20.34' at fld. 4659/12E. Unmonitored when twr clsd. No NOTAM MP 1st Wed of month 1500–2300Z.

DRAGOO NDB (MHW) 410 DAO N31°35.14' W110°20.66' at fld. Unmonitored when twr clsd.

ILS 109.9 I-FHU Rwy 26. Class IE. Unmonitored when twr clsd. No NOTAM MP 3rd Thu of month 1500–2300Z.

ASR/PAR (Mon-Fri 1400–0600Z except holidays)

COMM/NAV/WEATHER REMARKS: For emergency, freq 121.5 monitored when twr clsd. USAF weather forecast avbl 1200–0300Z from Davis Monthan AFB. Radar see Terminal FLIP for Radar Minima.

• • • • •

HELIPAD H1: H40X40 (ASPH)

HELIPAD REMARKS: ACTIVATE perimeter lgts Helipad H1—CTAF.

GILA BEND AF AUX (GBN) N32°53.25' W112°43.19' NOTAM FILE GBN.

PHOENIX

AIRSPACE: CLASS D opr during range periods only. Closed holidays. Other times class G.

H-41, L-5B, A

GILA BEND MUNI (E63) 2 E UTC-7 N32°57.61' W112°40.42'

PHOENIX

789 B TPA—1589(800) NOTAM FILE PRC

H-41, L-5B, A

RWY 04-22: H5200X75 (ASPH) S-12.5 MIRL

RWY 04: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

RWY 22: PAPI(P2L)—GA 3.0° TCH 40'. Tree.

AIRPORT REMARKS: Unattended. ACTIVATE MIRL Rwy 04-22—CTAF.


NOTE: See Special Notices—Restricted Area R-2305, Gila Bend, Arizona, Transit Information.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 116.6T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE GBN.

(H) VORTAC 116.6 GBN Chan 113 N32°57.38' W112°40.46' at fld. 790/14E.

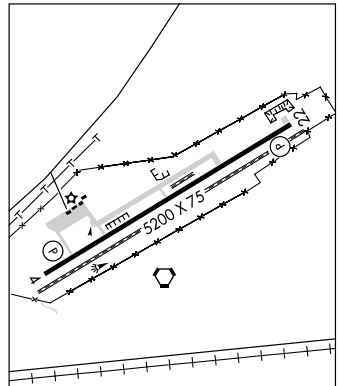

GLENDALE MUNI (GEU) 6 W UTC-7 N33°31.62' W112°17.71'

1071 B S4 FUEL 100, 100LL, JET A OX 2 TPA—See Remarks NOTAM FILE GEU

RWY 01-19: H7150X100 (ASPH) S-40, D-60 MIRL 0.4% up NE

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 38'. Thld dsplcd 701'.

Road. Rgt tfc.

RWY 19: REIL. PAPI(P2L)—GA 3.0° TCH 62'. Thld dsplcd 1001'.

Fence.

AIRPORT REMARKS: Attended continuously. Fuel avbl 1400-0400Z, fee other hrs. CAUTION: Heavy military jet tfc 5 miles west. Coyotes and birds on arpt. Bird activity invof arpt. High tension p-lines ¼ mile west parallel to rwy unmarked and unlighted. Touch and go ldg permitted between 1400-0500Z only. Avoid noise sensitive areas north and southeast of arpt. Rwy 01 preferred for noise abatement. Ctc arpt manager for additional noise abatement procedures. TPA—2101(1030), 1701(630) helicopter/ultralights, 2601(1530), high performance. West side helicopter pattern not avbl SS-SR. When twr clsd ACTIVATE MIRL Rwy 01-19, PAPI Rwy 01 and Rwy 19, REIL Rwy 01 and Rwy 19—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.425 (623) 877-8609.

COMMUNICATIONS: CTAF 121.0 ATIS 119.425 UNICOM 122.95

PHOENIX RCO 122.6 122.2 (PRESCOTT RADIO)

Ⓡ LUKE APP/DEP CON 118.15 Mon-Thu 1330-0530Z, Fri 1330-0130Z, closed weekends and holidays, other times ctc

Ⓡ PHOENIX APP/DEP CON 120.7


TOWER 121.0 (Mon-Fri 1300-0330Z, Sat-Sun 1400-0200Z) GND CON 118.0

AIRSPACE: CLASS D svc Mon-Fri 1300-0330Z, Sat-Sun 1400-0200Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 277° 17.3 NM to fld. 1182/12E. HIWAS.

COMM/NAV/WEATHER REMARKS: Emergency frequency 121.5 not monitored by twr.

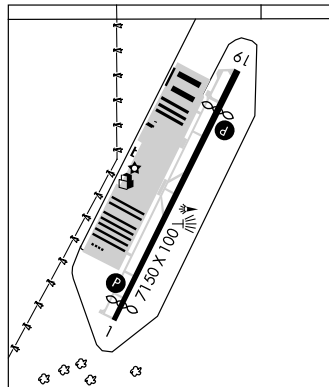

PHOENIX

H-41, L-5B, A
IAP, Ad

GLOBE N33°16.97' W110°49.76' NOTAM FILE PRC.

RCO 122.3 (PRESCOTT RADIO)

PHOENIX

L-5C

GLOBE

SAN CARLOS APACHE (P13) 7 SE UTC-7 N33°21.19' W110°40.04'

3261 B TPA—4261(1000) NOTAM FILE PRC

RWY 09-27: H6500X100 (ASPH-PFC) S-60 MIRL 1.2% up W

RWY 09: REIL. PAPI (P2L)—GA 3.15° TCH 40'.

RWY 27: REIL. PAPI (P2L)—GA 3.15° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Unattended. All rwy hold and twy exit signs OTS indefinitely. ACTIVATE MIRL Rwy 09-27—CTAF, PAPI Rwy 09 and Rwy 27 opr continuously.

WEATHER DATA SOURCES: AWOS-3 120.075 (928) 475-5560.


COMMUNICATIONS: CTAF/UNICOM 122.8

GLOBE RCO 122.3 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 125.4

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' 073° 49.6 NM to fld. 1370/13E. HIWAS.

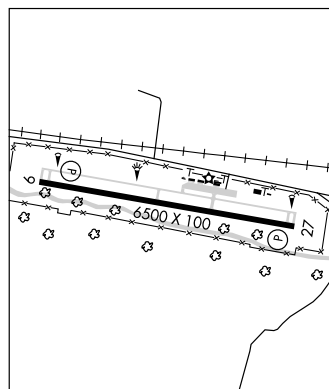

PHOENIX

H-41, L-5C
IAP


GOODYEAR

PHOENIX GOODYEAR (GYR) 1 SW UTC-7 N33°25.42' W112°22.47'
 968 B S4 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE GYR
 RWY 03-21: H8500X150 (ASPH) S-75, D-200, DT-270 MIRL

PHOENIX
 H-41, L-5B, A
 IAP, AD

RWY 03: REIL. PAPI(P2L)—GA 3.0° TCH 45'. 0.3% up.
 RWY 21: REIL. PAPI(P2L)—GA 3.5° TCH 45'. Thld dspcd 2100'.
 Building. Rgt tfc.

AIRPORT REMARKS: Attended 1300-0400Z. E-W power lines 100 feet
 AGL ½ mile S approach end Rwy 03 unmarked and unlighted some
 NSTD marking. Numerous large acft parked approximately 500' W
 of Rwy 03-21. Mountains SE at 6 miles to 4500'. Military jet tfc 5
 miles west of arpt. Acft departing Rwy 03 assigned right
 crosswind climb straight ahead to Litchfield Road or passing
 1032' AGL before starting right turn. Noise abatement in effect
 ctc 602-273-4300. Noise sensitive neighborhood 1-3 miles
 NNE-NE of arpt. TPA -1968(1000) light acft and non-turbo jets;
 2468(1500) heavy acft and turbo jets; 1468(500) helicopters. For
 MIRL Rwy 03-21 or REIL Rwy 03 and Rwy 21 during dalgt hrs ctc
 twr or arpt on 623-932-4550. After SS MIRL Rwy 03-21 are on.
 PAPI Rwy 03 and Rwy 21 opr continuously, REIL Rwy 03 and Rwy
 21 turned off when twr clsd. Fee for all charters; travel clubs and
 certain revenue producing acft. NOTE: See Special
 Notices—Aerobatic Operations.

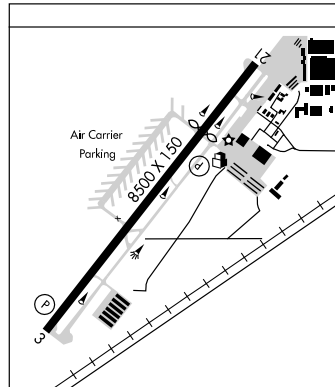

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 120.1 ATIS 118.35 UNICOM 122.95

PHOENIX RCO 122.6 122.2 (PRESCOTT RADIO)

Ⓡ LUKE APP/DEP CON 125.45 Mon-Thu 1330-0530Z, Fri 1330-0130Z, closed weekends and holidays, other times
 contact

Ⓡ PHOENIX APP/DEP CON 120.7

GOODYEAR TOWER 120.1 (1300-0400Z) GND CON 121.7

AIRSPACE: CLASS D svc 1300-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

BUCKEYE (L) VORTAC 110.6 BXK Chan 43 N33°27.21' W112°49.48' 080° 22.7 NM to fld. 1060/14E.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.

GRAND CANYON**GRAND CANYON NATL PARK**

(GCN) 6 S UTC-7 N35°57.14' W112°08.82'

LAS VEGAS

6609 B S6 FUEL 100LL, JET A OX 4 ARFF Index—See Remarks NOTAM FILE GCN H-41, L-8G

RWY 03-21: H8999X150 (ASPH-GRVD) S-88, D-108, DT-160 MIRL IAP, AD

RWY 03: MALS. 0.7% up.

RWY 21: REIL. VASI(V4L)—GA 3.0° TCH 52'. Rgt tfc. 1.0% down.

AIRPORT REMARKS: Attended Oct 1-May 31 1400-0200Z, Jun 1-Sep 30 1300-0300Z. Fuel avbl 24 hrs call 928-638-7117. Condors invof arpt. Class II, ARFF Index A. Index A CLOSED to unscheduled air carrier ops with more than 30 passenger seats except 24 hr PPR, call arpt manager 928-638-2446. ARFF Index B avbl with 24 hr PPR, call arpt manager 928-638-2446. Heavy volume of Air Taxi flights vicinity of Grand Canyon. Overnight parking fee and commercial ldg fee. When twr clsd ACTIVATE MIRL Rwy 03-21 and MALS Rwy 03—CTAF. Note: See Special Notices—Grand Canyon Special Flight Rules Area.

WEATHER DATA SOURCES: ASOS 124.3 (928) 638-0672. (ASOS frequency 124.3 not avbl. Thunderstorm reporting not avbl when twr clsd.)

COMMUNICATIONS: CTAF 119.0 ATIS 124.3 UNICOM 122.95

RCO 123.65 (PRESCOTT RADIO)

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

L.A. CENTER APP/DEP CON 124.85

CANYON TOWER 119.0 (Jun 1-Sep 30 1300-0300Z, Oct 1-May 31 1400-0200Z) GND CON 121.9


AIRSPACE: CLASS D svc Jun 1-Sep 30 1300-0300Z, Oct 1-May 31 1400-0200Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE GCN.

(L) VORW/DME 113.1 GCN Chan 78 N35°57.62' W112°08.76' at fld. 6668/15E.

VOR unusable 065°-115° byd 35 NM blo 14500'.

DME unusable 350°-035° byd 35 NM blo 14500'. 035°-115° byd 25 NM blo 14500'.

ILS 108.9 I-GCN Rwy 03. Class IA. Unmonitored when twr clsd.

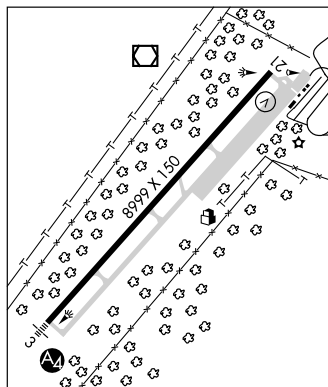**VALLE** (40G) 25 S UTC-7 N35°39.04' W112°08.88'

PHOENIX

5999 B S2 FUEL 100LL, JET A NOTAM FILE 40G L-8G

RWY 01-19: H4199X45 (ASPH) MIRL IAP

RWY 01: PVASI(PSIL) (NSTD)

RWY 19: PVASI (PSIL) (NSTD)

AIRPORT REMARKS: Attended 1400-0030Z. Unattended Christmas.


Wildlife on and invof arpt. ACTIVATE MIRL Rwy 01-19, PVASI Rwy 01 and Rwy 19—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

L.A. CENTER APP/DEP CON 124.85

RADIO AIDS TO NAVIGATION: NOTAM FILE GCN.

GRAND CANYON (L) VORW/DME 113.1 GCN Chan 78 N35°57.62' W112°08.76' 165° 18.6 NM to fld. 6668/15E.

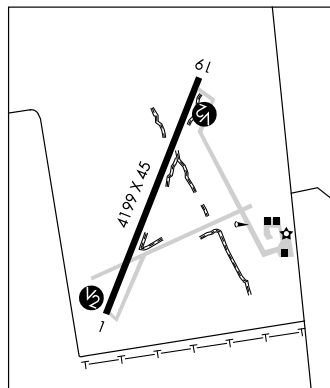
**GRAND CANYON BAR TEN AIRSTRIP** (See WHITMORE)**GRAND CANYON CAVERNS** (See PEACH SPRINGS)**GRAND CANYON WEST** (See PEACH SPRINGS)**GREENLEE CO** (See CLIFTON-MORENCI)**H. A. CLARK MEM FLD** (See WILLIAMS)

HOLBROOK MUNI (P14) 3 NE UTC-7 N34°56.43' W110°08.29'**PHOENIX**

5262 B FUEL 100LL NOTAM FILE PRC

H-4J, L-8G**RWY 03-21:** H6698X75 (ASPH-AFSC) S-12 MIRL**RWY 03:** REIL. PAPI(P2L). Thld dspcd 800'. Road.**RWY 21:** REIL. PAPI(P2L).**RWY 11-29:** 3200X120 (GRVL-DIRT)**RWY 11:** Fence.**RWY 29:** Pole.

AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z. For arpt attendant after hrs call 928-524-7832 or 928-241-0288. Rwy 11-29 soft dirt rwy, for condition of surface call 520-524-7832 or 928-241-0288. ACTIVATE MIRL Rwy 03-21, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21—CTAF.

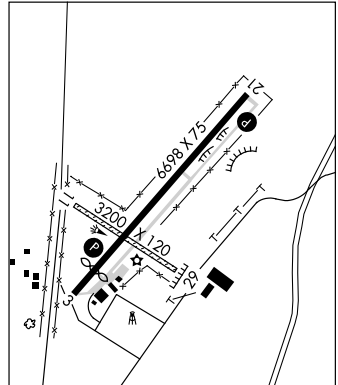WEATHER DATA SOURCES: AWOS-3 118.675**COMMUNICATIONS:** CTAF/UNICOM 122.8**WINSLOW RCO** 122.6 (PRESCOTT RADIO)**KAYENTA RCO** 122.45 (PRESCOTT RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE INW.**WINSLOW (H) VORTACW** 112.6 INW Chan 73 N35°03.70'W110°47.70' 088° 33.2 NM to fld. 4910/14E. **HIWAS.****KAYENTA** (ØV7) 2 SE UTC-7 N36°42.90' W110°13.92'**DENVER**

5710 B FUEL JET A NOTAM FILE PRC

H-4J, L-8H**RWY 05-23:** H7140X75 (ASPH) S-12.5 MIRL**RWY 05:** Pole. **RWY 23:** PVASI(P SIL)—GA 3.0°.

AIRPORT REMARKS: Unattended. Numerous cracks and ruts on rwy and twy. Rwy 05-23 4' brush within primary surface, plants growing through rwy and twy surface. Rwy rutted, numerous cracks, loose material, grass in cracks, longitudinal grade anomalies (dips). Unrestricted access to rwy from highway. Rwy 23 PVASI OTS indef.

COMMUNICATIONS: CTAF 122.9**RCO** 122.45 (PRESCOTT RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE PGA.**PAGE (L) VORW/DME** 117.6 PGA Chan 123 N36°55.86' W111°26.85' 089° 60.0 NM to fld. 4277/13E.**HIWAS.****KEARNY** (E67) 1 S UTC-7 N33°02.83' W110°54.54'**PHOENIX**

1833 S4 FUEL 100LL OX 2 NOTAM FILE PRC

L-5C**RWY 08-26:** H3400X60 (CONC) S-12.5**RWY 08:** Thld dspcd 195'. Tree.**RWY 26:** Thld dspcd 200'. Tree.

AIRPORT REMARKS: Unattended. 100LL avbl for emerg only. Birds, wildlife, military ops invof arpt. No lighting on arpt, night ops not recommended. Expect turbulence on Rwy 26 apch with wind from N and on dep Rwy 26. Fence 270' L/R off Rwy 26 end. Calm wind use Rwy 08, rapidly rising terrain all quadrants except SE quadrant. Fence 240' L/R off Rwy 08 end. Ditch both sides Rwy 08 end, 60' L/R of centerline with 6' drops. For noise abatement avoid schools and homes. Contact FBO 520-363-5175. Medical helicopter base 1 NM NW.

COMMUNICATIONS: CTAF/UNICOM 122.95**RADIO AIDS TO NAVIGATION:** NOTAM FILE IWA.**WILLIE (L) VORTACW** 113.3 IWA Chan 80 N33°18.19' W111°39.09' 099° 40.4 NM to fld.1370/13E. **HIWAS**

KINGMAN (IGM) 8 NE UTC-7 N35°15.57' W113°56.28'

3449 B S4 FUEL 100LL, JET A, TPA-4249(800) Class III, ARFF Index A.

NOTAM FILE IGM

RWY 03-21: H6827X150 (ASPH) S-45, D-85, ST-108, DT-125, DDT-265 MIRL

RWY 03: REIL.PAPI(P4L)—GA 3.0°.

RWY 21: REIL. PAPI(P4L)—GA 3.0°.

RWY 17-35: H6725X75 (ASPH) S-22, D-60 MIRL 1.3% up S

RWY 17: PAPI(P2L)—GA 3.0° TCH 38'.

RWY 35: PAPI(P2L)—GA 3.0° TCH 48'.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Parachute Jumping.

Scheduled air carrier ops with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt management. Call arpt manager 928-757-2134.

Ultralight and model airplane activity SW of arpt. Rwy 21 calm wind rwy. ACTIVATE MIRL Rwy 03-21 and Rwy 17-35, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21 and twy lights—CTAF. MIRL Rwy 17-35 preset low ints only.

WEATHER DATA SOURCES: ASOS 119.275 (928) 692-8104.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 108.8T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE IGM.


(L) VOR/DME 108.8 IGM Chan 25 N35°15.63'

W113°56.05' at fld. 3410/15E.

VOR/DME unusable:

030°-120° byd 20 NM blo 10,500'

120°-190° byd 15 NM blo 17,500'



190°-240° byd 30 NM blo 7,500'

240°-315° byd 30 NM blo 17,500'

LAGUNA AAF (YUMA PROVING GROUND) (LGF) A 12 NE UTC-7 N32°51.60' W114°23.80'

433 B TPA—See Remarks NOTAM FILE LGF Not insp.

RWY 18-36: H6118X150 (ASPH) PCN 56 F/B/W/T MIRL 0.8% up N

RWY 18: PAPI(P2L)—GA 3.0° TCH 37'. **RWY 36:** PAPI(P2L)—GA 3.0° TCH 46'. Rgt ttc.

RWY 06-24: H6000X100 (ASPH) PCN 68 F/B/W/T 1.0% up NE

RWY 06: Rgt ttc.

MILITARY SERVICE: LGT ACTIVATE MIRL and PAPI Rwy 18-36—121.8 JASU 1(MD-3) 1(59B2-1B) FUEL J8, 100LL, Petrol, Oils and Lubricants avbl Mon-Fri 1430-0000Z; clsd holidays. Petrol, oils and lubricants avbl with 24 hr PPR for tran acft. Contract fuel -AVCARD only. **TRAN ALERT** Limited maintenance svc avbl.

MILITARY REMARKS: Opr Mon-Fri 1300-0000Z, CLOSED holidays. **RSTD** Restricted area 4 NM E of airfield. Official business only. Overflight of housing area 3 NM SW of airfield is prohibited. 24 hr PPR for tran acft, telephone DSN 899-2241, C928-328-2241/2014. C-130 and larger acft are prohibited from making U-turns on rwy unless rqr for emergency or congestion and must be approved by Base OPS. No ops permitted when afld clsd.

CAUTION Intense opr on Cibola Range 1 NM N of airfield. Intense parachute drop opr vicinity 5 NM of airfield year round. Wildlife hazard, wild horses and burrow may be on airfield, use extreme caution during night opr. **TFC PAT** TPA-1911(1478) fixed wing, 1111(678) rotary wing. **MISC** Late arrival ctc Base Ops DSN 899-2014/2241, C928-328-2014/2241, and after duty hours call C928-920-1928. Rental car avbl thru Base OPS.

WEATHER DATA SOURCES: AWOS-3 128.225 (928) 328-5238.

COMMUNICATIONS: CTAF 126.2 242.175

YUMA APP CON 124.7 374.8 **YUMA DEP CON** 125.55 281.0

GND CON 121.8 229.4

RANGE 119.0 248.4 (Airfield advisory 126.2 242.175)

YUMA RCO 122.2 (PRESCOTT RADIO)

YUMA RCO 122.6 (SAN DIEGO RADIO)

AFLD ADVISORY 126.2 242.175

RADIO AIDS TO NAVIGATION: NOTAM FILE SAN.

BARD (H) VORTAC 116.8 BZA Chan 115 N32°46.09' W114°36.17' 048° 11.8 NM to fld. 130/14E.

LAKE HAVASU CITY (HII) 6 N UTC-7 N34°34.27' W114°21.50'

PHOENIX

783 B S4 FUEL 100LL, JET A OX 2, 4 TPA—See Remarks ARFF Index—See Remarks
NOTAM FILE PRC

H-4I, L-7E
IAP

RWY 14-32: H8001X100 (ASPH) S-100 MIRL 0.4% up SE


RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Rgt tfc.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 35'. Hill.

AIRPORT REMARKS: Attended 1500-0000Z. Power lines/towers and high terrain N/NE of arpt. Ultralight acft ops invof arpt from surface to 5000'. Class III, ARFF Index A. ARFF Index B avbl with PPR, etc arpt manager (928) 764-3330, Mon-Fri 1500-0000Z. UNICOM attended daily 1400-0100Z. Scheduled air carrier ops involving acft with more than 9 passenger seats are not authorized in excess of 15 min before or 15 min after scheduled arrival or departure times without prior coordination with arpt management, and confirmation that ARFF svcs are avbl prior to ldg or txf. Rwy 32 designated calm wind rwy. TPA 1803 (1020) light acft, 2303 (1520) high performance acft. Noise abatement—straight-in straight-out apch/dep prohibited. Enter pattern using 45° entry to downwind. Do not overfly residential communities S/SW of arpt. ACTIVATE MIRL Rwy 14-32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (928) 764-2317.**COMMUNICATIONS:** CTAF/UNICOM 122.7

L.A. CENTER APP/DEP CON 134.65

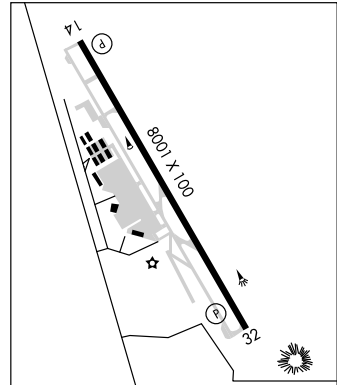RADIO AIDS TO NAVIGATION: NOTAM FILE EED.**NEEDLES (H) VORTAC** 115.2 EED Chan 99 N34°45.96' W114°28.45' 139° 13.0 NM to fld. 620/15E. **HIWAS.****LAUGHLIN/BULLHEAD INTL** (See BULLHEAD CITY)**LIBBY** N31°35.38' W110°21.30' NOTAM FILE FHU.

PHOENIX

(T) VOR 113.6 FHU at Sierra Vista Muni—Libby AAF. Unmonitored when twr clsd.

H-4I, L-5C

No NOTAM MP 2nd Tue of month 1500-1900Z. Unusable: 110°-225° byd 15 NM.**LUKE AFB** (LUF(KLUF) AF 7 W UTC-7 N33°32.10' W112°22.98'

PHOENIX

1085 B TPA—See Remarks NOTAM FILE LUF Not insp.

H-4I, L-5B, A

RWY 03L-21R: H10012X150 (ASPH) PCN 42 R/C/W/T HIRL

DIAP, AD

RWY 03L: PAPI(P4L)—GA 3.0° TCH 50'. RWY 21R: PAPI(P4L)—GA 3.0° TCH 47'. Rgt tfc.

RWY 03R-21L: H9904X150 (CONC) PCN 62 R/B/W/T HIRL

RWY 03R: ALSF1. PAPI(P4L)—GA 3.0° TCH 51'.

RWY 21L: ALSF1. PAPI(P4L)—GA 3.0° TCH 47'. Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 03L HOOK BAK-9(B) (22' OVRN) HOOK BAK-12A(B) (1444')

HOOK BAK-12A(B) (1519') HOOK BAK-9(B) (36' OVRN) RWY 21R

RWY 03R HOOK BAK-9(B) (50' OVRN) HOOK BAK-12A(B) (1413')

HOOK BAK-12A(B) (1453') HOOK BAK-9(B) (30' OVRN) RWY 21L

MILITARY SERVICES: LGT Rwy 21L ALSF1 NSTD. PAPI GS 3° with touchdown point approximately 945' past thld on all rwy. Rwy 03R-21 ILS and PAPI GS not coincidental all rwy thld lighting is gated. **A-GEAR** Rwy 03L-21R BAK-12A in raised position with 8 point tie-downs. Rwy 03R-21L dep end BAK-12A in raised position. Rwy 03R-21L apch end BAK-12A in raised position with 30 min prior notice. During extended single rwy opr, app and dep end BAK-12A in raised position for the open rwy. **JASU** 2(AM32A-60A) 2(MC-1A) **FUEL** J8 **FLUID** SP **PRESAIR** **LPOX** **LOX** **OIL** O-128 Packaged only, rqr hand transfer; 133-148-156 **SOAP** **TRAN ALERT** Ltd tran parking. Expect up to 4 hr svc delay. Follow me svc avbl on request. No fleet svc avbl. No F16 GE engine tran support avbl.

MILITARY REMARKS: Opr Mon-Thu 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays. See FLIP AP/1 Supplementary Arpt Remarks **RSTD** PPR all acft except Aero-Medical Evacuation mission, etc Base OPS DSN 896-7131, C623-856-7131/7132. Aerodrome official business only in support of LUKE AFB mission. Acft must adhere to PPR arrival block time +/- 30 min of scheduled ldg. Tran acft will make full stop ldg during local training period. Minimum 24 hr advance coordination for acft with gross weight of 135,000 lb or more. No local sorties will be flown out by tran acft. All acft larger than KC-135 PPR from afld manager prior to utilizing Rwy 03L-21R. AV-8 acft may not conduct hover ldg without specific permission of Luke Twr. All acft will file a flight plan prior to departure. No practice apch for civil acft at Luke AFB and auxiliary fld due to student training. Twy F closed until further notice. **CAUTION** Extensive student jet tfc. Pilots should use extreme caution when flying Rwy 03-21 final apch course due to VFR flyways. High potential for hydroplaning on both rwy during wet conditions. Instrument and VFR hold mark intersection on Twy Bravo at the intersection of Rwy 03R-21L.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

Apron lgt pole located 1200' SE from Rwy 03R-21L centerline, 456' and 676' from Rwy 21L thld and apron lgt pole located 1430' SW from Rwy 03R-21L centerline, 676' from Rwy 21L thld. Various 90' lgt poles located near fire training facility located 1358.3' from Rwy 21R centerline. **TFC PAT** Overhead 300 KIAS, 3000' until 5 DME then 2600'. Rwy 03R/L left tfc. Conventional 2100'. Rwy 03L/R left tfc with base leg position to avoid Phoenix-Goodyear Arpt Tfc Area 4 NM south. Rwy 21R/L rgt tfc with base leg outside housing area 1 NM east. **NS ABTMT** Extremely noise sensitive area 5 NM northeast. **MISC** First 3600' of Rwy 03L and first 1000' Rwy 21R is concrete mid 5400' asphalt. Four engine acft will if authorized, shut-down outboard engine prior to taxi after lgt. KC135 or larger acft expect back taxi procedure after lgt Rwy 21L/R. Classified storage for tran aircrews is no longer avbl at Afd Management Ops, please contact Command Post for storage at DSN 896-5600 or COMM (623) 856-5600.

WEATHER DATA SOURCES: ASOS (623) 856-4361.

COMMUNICATIONS: ATIS 134.925 269.9 PTD 372.2

APP/DEP 118.15 363.12 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

TOWER 119.1 379.9 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

GND CON 133.175 335.8 **CLNC DEL** 126.25 273.475

COMD POST (RAYMOND 18) 349.4 **PMSV METRO** 267.4 (Mon-Thru 1330-0530Z, Fri 1330-0130Z, clsd wkend and hol.

Trans acft wx briefing svc ctc 25 OWS, Davis Monthan AFB, DSN 228-6598/6599/6588. Augmented ASOS in use during afd hrs. ASOS observations avbl at DSN 896-4361 or C623-856-4361.

AIRSPACE: CLASS D svc Mon-Thru 1330-0530, Fri 1330-0130Z, closed weekends and holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION:

(L) **TACAN** Chan 77 LUF (113.0) N33°32.26'W112°22.91' at fld. 1108/13E. No-NOTAM MP Sun 1500-1900Z, Wed 1000-1300Z. Opr 1330-0530Z, monitor by Luke RAPCON during opr hr.

TACAN unusable:

130°-160°byd 29 NM blo 9,000'

235°-305° byd 38 NM

235°-305° byd 19 NM blo 8,000'

305°-320° byd 34 NM blo 8,000'

235°-305° byd 27 NM blo 12,000'

ILS 108.7 I-LUF Rwy 03R. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

ILS 110.9 I-EMJ Rwy 21L. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

MARANA

PINAL AIRPARK (MZJ) 7 NW UTC-7 N32°30.59' W111°19.52'

1893 B S4 **FUEL** 100LL, JET A OX 1, 2, 4 TPA—See Remarks NOTAM FILE MZJ

PHOENIX

H-41, L-5C

RWY 12-30: H6849X150 (ASPH) S-68, D-100, DT-150 MIRL

RWY 30: Rgt tfc.

AIRPORT REMARKS: Attended 1400-0030Z. For fuel and ground support services after hours and holidays 24 hour PPR call 520-682-4181 extension 5755. Parachute Jumping. Parachute Jump areas located west of Rwy 12-30. CAUTION: —10' open channel 1000' from Rwy 12 end. Numerous controlled vehicles crossing Rwy 12-30. Coyotes and other wild animals in vicinity of Rwy 12-30 during evening hours. Rwy 12 preferred calm wind rwy. Extensive military helicopter training 1400-0600Z except holidays. Extensive military and civil parachute training high and low levels all hours. Unicom monitored intermittently during normal business hours. TPA 3002(1109) fixed wing acft; 2602(709) rotary wing acft. Twy C clsd indef. Acft storage/overnight fee ctc 520-267-5631. PPR for transient acft to National Guard Complex/Silver Bell National Guard Heliport phone 520-616-5631. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.


WEATHER DATA SOURCES: AWOS-3 130.375 (520) 682-3519.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 308° 32.4 NM to fld. 2672/12E.

HIWAS.



MARANA RGNL (See TUCSON)

CONTINUED FROM PRECEDING PAGE

Apron lgt pole located 1200' SE from Rwy 03R-21L centerline, 456' and 676' from Rwy 21L thld and apron lgt pole located 1430' SW from Rwy 03R-21L centerline, 676' from Rwy 21L thld. Various 90' lgt poles located near fire training facility located 1358.3' from Rwy 21R centerline. **TFC PAT** Overhead 300 KIAS, 3000' until 5 DME then 2600'. Rwy 03R/L left tfc. Conventional 2100'. Rwy 03L/R left tfc with base leg position to avoid Phoenix-Goodyear Arpt Tfc Area 4 NM south. Rwy 21R/L rgt tfc with base leg outside housing area 1 NM east. **NS ABTMT** Extremely noise sensitive area 5 NM northeast. **MISC** First 3600' of Rwy 03L and first 1000' Rwy 21R is concrete mid 5400' asphalt. Four engine acft will if authorized, shut-down outboard engine prior to taxi after lgt. KC135 or larger acft expect back taxi procedure after lgt Rwy 21L/R. Classified storage for tran aircrews is no longer avbl at Afd Management Ops, please contact Command Post for storage at DSN 896-5600 or COMM (623) 856-5600.

WEATHER DATA SOURCES: ASOS (623) 856-4361.

COMMUNICATIONS: ATIS 134.925 269.9 PTD 372.2

APP/DEP 118.15 363.12 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

TOWER 119.1 379.9 (Mon-Thru 1330-0530Z, Fri 1330-0130Z; clsd weekends and holidays)

GND CON 133.175 335.8 **CLNC DEL** 126.25 273.475

COMD POST (RAYMOND 18) 349.4 **PMSV METRO** 267.4 (Mon-Thru 1330-0530Z, Fri 1330-0130Z, clsd wkend and hol.

Trans acft wx briefing svc ctc 25 OWS, Davis Monthan AFB, DSN 228-6598/6599/6588. Augmented ASOS in use during afd hrs. ASOS observations avbl at DSN 896-4361 or C623-856-4361.

AIRSPACE: CLASS D svc Mon-Thru 1330-0530, Fri 1330-0130Z, closed weekends and holidays, other times CLASS G.

RADIO AIDS TO NAVIGATION:

(L) **TACAN** Chan 77 LUF (113.0) N33°32.26'W112°22.91' at fld. 1108/13E. No-NOTAM MP Sun 1500-1900Z, Wed 1000-1300Z. Opr 1330-0530Z, monitor by Luke RAPCON during opr hr.

TACAN unusable:

130°-160°byd 29 NM blo 9,000'

235°-305° byd 38 NM

235°-305° byd 19 NM blo 8,000'

305°-320° byd 34 NM blo 8,000'

235°-305° byd 27 NM blo 12,000'

ILS 108.7 I-LUF Rwy 03R. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

ILS 110.9 I-EMJ Rwy 21L. Back course unusable. No NOTAM MP; Tue, Thu 1000-1300Z.

MARANA

PINAL AIRPARK (MZJ) 7 NW UTC-7 N32°30.59' W111°19.52'

1893 B S4 **FUEL** 100LL, JET A OX 1, 2, 4 TPA—See Remarks NOTAM FILE MZJ

PHOENIX

H-41, L-5C

RWY 12-30: H6849X150 (ASPH) S-68, D-100, DT-150 MIRL

RWY 30: Rgt tfc.

AIRPORT REMARKS: Attended 1400-0030Z. For fuel and ground support services after hours and holidays 24 hour PPR call 520-682-4181 extension 5755. Parachute Jumping. Parachute Jump areas located west of Rwy 12-30. CAUTION: —10' open channel 1000' from Rwy 12 end. Numerous controlled vehicles crossing Rwy 12-30. Coyotes and other wild animals in vicinity of Rwy 12-30 during evening hours. Rwy 12 preferred calm wind rwy. Extensive military helicopter training 1400-0600Z except holidays. Extensive military and civil parachute training high and low levels all hours. Unicom monitored intermittently during normal business hours. TPA 3002(1109) fixed wing acft; 2602(709) rotary wing acft. Twy C clsd indef. Acft storage/overnight fee ctc 520-267-5631. PPR for transient acft to National Guard Complex/Silver Bell National Guard Heliport phone 520-616-5631. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.


WEATHER DATA SOURCES: AWOS-3 130.375 (520) 682-3519.

COMMUNICATIONS: CTAF/UNICOM 123.05

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 308° 32.4 NM to fld. 2672/12E.

HIWAS.



MARANA RGNL (See TUCSON)

MARBLE CANYON (L41) 1 SW UTC-7 N36°48.65' W111°38.67'

LAS VEGAS

3603 NOTAM FILE PRC

RWY 03-21: H3715X35 (ASPH)

RWY 03: Ground.

RWY 21: Tree.

AIRPORT REMARKS: Attended daylight hours. Rwy 03 first 1000' rough and badly rutted. Rwy 03 has 6 inch ruts approximately 50' long 55'-60' from rwy end. Rwy 03 centerline only. Rwy 03 numbers, edge and thld markings missing. Rwy 21 centerline only. Rwy 21 numbers, edge and thld markings missing. No line of sight between rwy ends. Landing fee.


COMMUNICATIONS: CTAF 122.9

KAYENTA RCO 122.45 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.

PAGE (L) VOR/DME 117.6 PGA Chan 123 N36°55.86'

W111°26.85' 220° 11.9 NM to fld. 4277/13E. HIWAS.

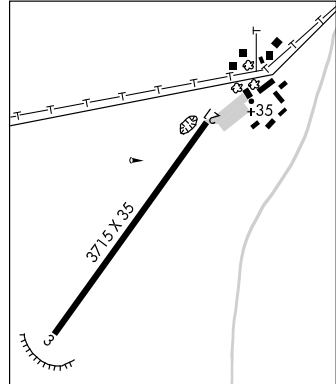**MARICOPA****ESTRELLA SAILPORT** (E68) 6 W UTC-7 N33°05.12' W112°09.66'

PHOENIX

1273 NOTAM FILE PRC

RWY 07-25: 3740X20 (DIRT)

RWY 07: Brush.

RWY 25: Brush.

RWY 06R-24L: H2520X30 (ASPH)

RWY 06R: Rgt tfc.

RWY 06C-24C: 1995X25 (DIRT)

RWY 06C: Brush. Rgt tfc.

RWY 24C: Brush.

RWY 06L-24R: 1910X25 (DIRT)

RWY 06L: Tree. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1800Z-dusk, Sat and Sun 1600Z-dusk. Parachute Jumping. Arpt CLOSED at ngt. All acft PPR due to heavy glider activity ctc (520) 568-2318. Hills NW, W, SW. Powered aircraft pattern is S of runways; glider pattern is N of runways. Powered aircraft are requested to use rwy not in use by gliders. Powered acft be alert for heavy glider tfc operating without communication within 5 NM of Estrella Sailport. An aerobatic box is active from 1600-0100Z, one square mile around the PXR194023. Heavy no-radio activity. Paved rwy for tkf only.

COMMUNICATIONS: CTAF 122.9**MEADVIEW****PEARCE FERRY** (L25) 3 N UTC-7 N36°05.59' W114°02.80'

LAS VEGAS

2941 NOTAM FILE PRC

RWY 01-19: 2900X110 (DIRT)

RWY 01: Rgt tfc.

AIRPORT REMARKS: Unattended. Use extreme care wild livestock on and in vicinity of arpt. Signs 1050' from Rwy 01, 90' left; 200' from Rwy 19, 110' left. Rwy 01-19 E 15' and W 40' of rwy width, full length of rwy are rough with loose gravel. Rwy 01-19 550' stopway S of Rwy 01 covered with large loose rocks and low vegetation. Scattered +5' bushes along the E and W side of Rwy 01-19. Rwy 01-19 center 50' clear of vegetation. Gravel apron area located west side of Rwy 19 near apch end.

COMMUNICATIONS: CTAF 122.9

MESA**FALCON FLD** (FFZ) 5 NE UTC-7 N33°27.65' W111°43.70'**PHOENIX**1394 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE FFZ
RWY 04R-22L: H5101X100 (ASPH) S-38, D-60, DT-90 MIRL 0.6% up NEH-41, L-5B, A
IAP, AD

RWY 04R: REIL. PAPI(P2L)—GA 3.0°. Road.

RWY 22L: REIL. PAPI(P2L)—GA 4.0°. Tree. Rgt tfc.


RWY 04L-22R: H3799X75 (ASPH) S-12.5 MIRL 0.5% up NE

RWY 04L: PAPI(P2L)—GA 3.0°. Pole.

RWY 22R: PAPI(P2L)—GA 4.0°. Road. Rgt tfc.

AIRPORT REMARKS: Attended continuously. For svc ctc FBO on 122.950 (480-832-2582) or 129.025 (480-641-5000). Coyotes invof rws and twys. Turbulent conditions may be encountered blo 500' AGL near gnd test site 1.5 miles north of arpt. Rising terrain NE of arpt. Extensive fixed wing and rotorcraft flight training activity. Do not mistake Boeing heliport 1 mile north for a rwy. TPA—2400 (1006) for light acft, 2900 (1506) for large and turbine-powered acft, 1900 (506) for rotorcraft. Terminal apron area limited to 30,000 pounds gross weight single wheel or 50,000 pounds gross weight dual wheel by arpt manager. Voluntary noise abatement procedures in effect. For noise abatement procedures call 480-644-2444 between Mon-Thu 1400-0100Z. Noise sensitive areas all quadrants. When twr clsd MIRL Rwy 04R-22L and twy lgts preset low ints, to increase ints ACTIVATE—CTAF.

MIRL Rwy 04L-22R unavailable when twr clsd. For REIL Rwy 04R and Rwy 22L ctc twr.

WEATHER DATA SOURCES: LAWRS.**COMMUNICATIONS:** CTAF 124.6 ATIS 118.25 (480) 641-9378. UNICOM 122.95® **PHOENIX APP/DEP CON** 120.7**TOWER** 124.6 (1300-0400Z) **GND CON** 121.3**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**PHOENIX (H) VORTACW** 115.6 PXR Chan 103 N33°25.98' W111°58.21' 070° 12.3 NM to fld.
1182/12E. HIWAS.**NDB (MHW)** 281 FFZ N33°27.71' W111°43.99' at fld. Unusable 315°-110° byd 20 NM blo 8,700'.**COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not available at twr.• • • • •
HELIPAD H1: H60X60 (ASPH) S-30**HELIPAD H2:** H60X60 (ASPH) S-30**HELIPORT REMARKS:** Gross weight pavement strength 10,000 pounds.**MINGUS MOUNTAIN** N34°42.13' W112°07.03'**PHOENIX**

RC0 122.3 (PRESCOTT RADIO)

H-41, L-8F

MOUNT LEMMON N32°24.50' W110°43.46'**PHOENIX**

RC0 122.4 (PRESCOTT RADIO)

L-5C

NOGALES INTL (OLS) 7 NE UTC-7 N31°25.06' W110°50.87'

3955 B S4 FUEL 100LL, JET A AOE NOTAM FILE OLS

RWY 03-21: H7199X90 (ASPH) S-21 MIRL 1.6% up NE

RWY 03: PAPI(P4L)—GA 3.0° TCH 68'.

RWY 21: PAPI(P4L)—GA 4.0° TCH 17'. Thld dspcd 910'. Hill.

AIRPORT REMARKS: Attended 1400-0200Z. Straight-in apchs not recommended. Gross weight S-21 for center 90', remainder of rwy width is S-7. Rwy 03 is CLOSED to touch and go landing. Rwy 21 designated calm wind rwy. ACTIVATE MIRL Rwy 03-21—CTAF. Flight Notification Service (ADCUS) available. NOTE: See Special Notices—U.S. Special Customs Requirement.

WEATHER DATA SOURCES: ASOS 121.125 (520) 287-9332.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.4 (PRESCOTT RADIO)

TUCSON APP/DEP CON 125.1

RADIO AIDS TO NAVIGATION: NOTAM FILE OLS.

(L) VORW/DME 108.2 OLS Chan 19 N31°24.90'

W110°50.93' at fld. 3870/12E.

VOR/DME unusable:

330°-355° beyond 30 NM below 13,500'

030°-080° beyond 25 NM below 17,900'

NDB (HW) 394 ENZ N31°25.28' W110°50.79' at fld.


Unusable:

080°-270° byd 5 NM

330°-080° byd 25 NM

COMM/NAV/WEATHER REMARKS: Call Prescott Radio on 122.4 to close all flight plans.

HELIPAD H1: H97X97 (CONC)

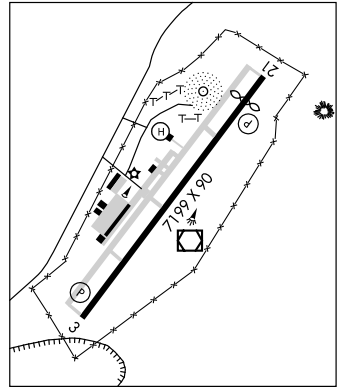

PHOENIX
H-41, L-5C
IAP

PAGE MUNI (PGA) 1 E UTC-7 N36°55.57' W111°26.90'

4316 B S4 FUEL 100LL, JET A OX 1, 2 Class III, ARFF Index A NOTAM FILE PGA

RWY 15-33: H5950X150 (ASPH) S-65, D-90, ST-114, DT-190 MIRL 1.2% up S

RWY 15: REIL. VASI(V2L)—GA 3.0° TCH 52'.

RWY 33: REIL. VASI(V2L)—GA 3.0° TCH 30'. Rgt tfc.

RWY 07-25: H2201X100 (ASPH) D-12.5

RWY 07: Thld dspcd 588'.

RWY 25: Rgt tfc.

AIRPORT REMARKS: Attended dalgt hours. For fuel after hours ctc 928-660-1060 or 928-645-5356. CLOSED to air carrier ops with more than 30 passenger seats except 24 hr prior permission call arpt manager 928-645-8861. ARFF avbl 5-7 minutes without prior permission. Use Rwy 07-25 only during high winds.

Overnight parking fee. ACTIVATE MIRL Rwy 15-33 and REIL Rwy 15 and Rwy 33—CTAF. VASI Rwy 15 and Rwy 33 opr continuously.

WEATHER DATA SOURCES: ASOS 120.625 (928) 645-1228. HIWAS 117.6 PGA.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.6 (PRESCOTT RADIO)

KAYENTA RCO 122.45 (PRESCOTT RADIO)

DENVER CENTER APP/DEP CON 127.55

RADIO AIDS TO NAVIGATION: NOTAM FILE PGA.

(L) VORW/DME 117.6 PGA Chan 123 N36°55.86'


W111°26.85' at fld. 4277/13E. HIWAS.

VOR/DME unusable:

105°-230° byd 30 NM blo 11,000'

230°-245° byd 30 NM blo 12,000'

COMM/NAV/WEATHER REMARKS: UNICOM ADZY avbl 122.8 SR to SS only.

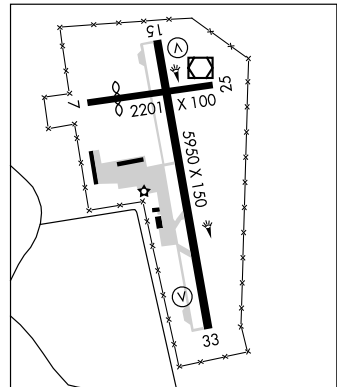

LAS VEGAS
H-41, L-8G, 9C
IAP

PARKER

AVI SUQUILLA (P20) 1 E UTC-7 N34°09.04' W114°16.27'

452 B S4 FUEL 100LL, JET A TPA-1252(800) NOTAM FILE PRC

RWY 01-19: H4780X75 (ASPH) S-20 MIRL

RWY 01: Rgt tfc. Pole.

RWY 19: PAPI(P2L)—GA 3.0° TCH 21'. Tree.

AIRPORT REMARKS: Attended 1500-0500Z. Service fee for fuel when arpt is unattended. Rwy 01-19 be alert to exposed MIRL concrete bases both sides of rwy. Drainage ditch traverses rwy safety area 130' from rwy end. Minimum altitude over Colorado River 1500' AGL. Twy S from midfield to west side of rwy clse indef.


ACTIVATE MIRL Rwy 01-19 and twy lgtS—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.725

L.A. CENTER APP/DEP CON 128.15

RADIO AIDS TO NAVIGATION: NOTAM FILE RAL.

PARKER (H) VORTAC 117.9 PKE Chan 126 N34°06.12' W114°40.93' 067° 20.7 NM to fld. 1000/15E.



PHOENIX

L-5A

IAP

PAYSON (PAN) 1 W UTC-7 N34°15.41' W111°20.36'

5157 B S2 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE PRC

RWY 06-24: H5500X75 (ASPH) S-40, D-50, DT-100 MIRL 0.3% up E

RWY 06: Tree. RWY 24: PAPI(P2L). Rgt tfc.

AIRPORT REMARKS: Attended 1500-0000Z. For fuel after hours call 928-802-2460 pager. 7 inch ruts adjacent rwy and twy safety areas. Rwy 24 calm wind rwy. Departure noise abatement procedures in effect, turn north 30° for 2 NM. Avoid arrival/departure over town below 1,000'. TPA—Prop engine 6200 (1043), jet/multi-engine and large engine 6700 (1543), helicopters 5700 (543). Overnight parking fee. MIRL preset low ints to increase ints ACTIVATE—CTAF. PAPI Rwy 24 opr continuously.

WEATHER DATA SOURCES: AWOS-3 119.325 (928) 472-4260.

COMMUNICATIONS: CTAF/UNICOM 122.8


ALBUQUERQUE CENTER APP DEP CON 132.9

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE INW.

WINSLOW (H) VORTACW 112.6 INW Chan 73 N35°03.70'

W110°47.70' 195° 55.2 NM to fld. 4910/14E. HIWAS.



PHOENIX

H-41, L-5C, 8G

IAP

HELIPAD H1: H50X50 (CONC)

HELIPORT REMARKS: Helipad H1 surrounded on 3 sides by 4' fence.

PEACH SPRINGS

GRAND CANYON CAVERNS (L37) 9 E UTC-7 N35°31.62' W113°14.85'

5386 NOTAM FILE PRC

RWY 05-23: 5100X45 (GRVL)

RWY 05: Fence. RWY 23: Fence.

AIRPORT REMARKS: Attended dalgT hours. Elk on and invof arpt. Prairie dog holes within 5' of rwy edge full length.

Rwy 05-23 2-3' brush within 10' of rwy edge full length.

COMMUNICATIONS: CTAF/UNICOM 122.8

PHOENIX

GRAND CANYON WEST (1G4) 60 NW UTC-7 N35°59.42' W113°48.99'

LAS VEGAS

4825 Class III, ARFF Index A NOTAM FILE PRC

H-41, L-8F, A

RWY 17-35: H5058X60 (ASPH)

RWY 17: Rgt tfc.

RWY 35: Road.

AIRPORT REMARKS: Attended dailgt hrs. Use extreme care due to large volume of high-speed fixed wing and rotary wing tfc in and around vicinity of the arpt. Arpt not avbl for ngt ops. Due to high commercial fixed wing and helicopter tfc volume no practice touch and go ops. Recommend using Rwy 35 for departures and Rwy 17 for ldg.

Temporary Rwy 17-35 west of permanent rwy in use until further notice. Ldg fee.

WEATHER DATA SOURCES: HIWAS 112.0 PGS.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

PEACH SPRINGS (H) VORTACW 112.0 PGS Chan 57 N35°37.48' W113°32.68' 314° 25.6 NM to fld.

4760/15E. HIWAS.

PEACH SPRINGS N35°37.48' W113°32.67' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 112.0 PGS Chan 57 207° 29.4 NM to Kingman. 4760/15E. HIWAS.

H-41, L-8F

RCO 122.25 (PRESCOTT RADIO)

PEARCE FERRY (See MEADVIEW)

PEORIA
PLEASANT VALLEY (P48) ØN UTC-7 N33°48.04' W112°15.04'

PHOENIX

1580 FUEL 100LL NOTAM FILE PRC

RWY 05C-23C: 4200X100 (DIRT)

RWY 05C: Thld dsplcd 490'. Road. Rgt tfc.

RWY 23C: Thld dsplcd 200'. Road.

RWY 05L-23R: 4200X100 (DIRT)

RWY 05L: Thld dsplcd 480'. Road.

RWY 23R: Thld dsplcd 63'. Road. Rgt tfc.

RWY 05R-23L: 4200X100 (DIRT)

RWY 05R: Thld dsplcd 580'. Road. Rgt tfc.

RWY 23L: Thld dsplcd 240'. Road.

RWY 14-32: 2400X100 (DIRT)

RWY 14: Thld dsplcd 200'. Rgt tfc.

RWY 32: Thld dsplcd 300'. Road.

AIRPORT REMARKS: Attended 1600-0000Z. Aerobatic activity on and invof arpt. Extensive glider and ultralight activity on and invof arpt. Powered acft preferred Rwy 23R-05L. Rwy 23C, Rwy 23R and Rwy 23L +24' P-line marked with balls across thlds. Bldg and parked acft located 120' South of Rwy 05R-23L approximately midpoint. Rwy separations do not meet minimum standards, simultaneous ops not authorized on any two rwys. Shallow underground gas pipelines located 240' from end of runway 23L, 23C, and 23R. Dsplcd thlds on all rwys marked with white chalk and small white tires. Ctc FBO on 122.9.

COMMUNICATIONS: CTAF 122.9

PHOENIX N33°25.98' W111°58.21' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 115.6 PXR Chan 103 260° 2.1 NM to Phoenix Sky Harbor Intl. 1182/12E. HIWAS.

H-41, L-5B, A

VORTAC unusable:

360°-015° byd 33 NM blo 11,000'

345°-034° byd 20 NM blo 8,000'

345°-034° byd 10 NM blo 6,000'

185°-190° byd 30 NM blo 8,000'

090°-100° byd 15 NM blo 8,000'

185°-190° byd 38 NM blo 9,000'

190°-230° byd 20 NM blo 10,000'

015°-034° byd 33 NM blo 10,000'

VOR unusable:

345°-360° byd 33 NM blo 10,000'

DME unusable:

345°-360° byd 33 NM blo 11,000'

RCO 122.6 122.2 (PRESCOTT RADIO)

PHOENIX GOODYEAR (See GOODYEAR)

PHOENIX**PHOENIX DEER VALLEY** (DVT) 15 N UTC-7 N33°41.30' W112°04.95'**PHOENIX**

1478 B S4 FUEL 100LL, JET A OX 1, 3 TPA—See Remarks NOTAM FILE DVT

H-41, L-5B, A
IAP, AD**RWY 07R-25L:** H8197X100 (ASPH) S-20, D-91, DT-255 MIRL**RWY 07R:** REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 898'.

Tree. Rgt tfc. 0.5% up.

RWY 25L: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 917'.

Road.


0.4% down.

RWY 07L-25R: H4508X75 (ASPH) S-70 D-117 MIRL 0.5% up E**RWY 07L:** REIL. PAPI(P2L)—GA 4.0° TCH 53'. Tree.**RWY 25R:** REIL. PAPI(P2L)—GA 3.5° TCH 47'. Hill. Rgt tfc.

AIRPORT REMARKS: Attended 1300-0400Z. Fuel avbl continuous. Lgtd hills NE, E, SE and W. Flocks of birds and wildlife on and in vof arpt. Hot air balloon ops N, NE and NW of arpt. Rwy 07L-25R is designated training rwy. Aerobatic practice area approximately 8½ miles northwest of the Deer Valley Arpt from the surface to 6000' MSL. Parallel taxiway north is in close proximity to Rwy 07L-25R. MIRL, PAPI and REIL Rwy 07R-25L and Rwy 07L-25R on when twr clsd. Fee for all charters; travel clubs and certain revenue producing acft. TPA-2500(1022) single engine and 3000(1522) multi engine.

WEATHER DATA SOURCES: ASOS (623) 587-7764.**COMMUNICATIONS:** CTAF 118.4 ATIS 126.5**PHOENIX RCO** 122.6 122.2 (PRESCOTT RADIO)® **PHOENIX APP/DEP CON** 120.7**DEER VALLEY TOWER** 118.4 (Rwy 07R-25L) 120.2 (Rwy 07L-25R) (1300-0400Z) **GND CON** 121.8**CLNC DEL** 123.9**AIRSPACE:** CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 328° 16.3 NM to fld.
1182/12E. HIWAS.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.**PHOENIX RGNL** (A39) 28 SSE UTC-7 N32°59.45' W111°55.11'**PHOENIX**

1300E NOTAM FILE PRC

H-2F, L-5B, A

RWY 03-21: H5000X50 (ASPH)**RWY 03:** Tree. **RWY 21:** Tree.

AIRPORT REMARKS: Unattended. Large transverse cracks 3-6" wide 100-200' spacing entire rwy length. 45' p-line 2 miles south southwest and 2 miles northeast of arpt. Antenna estimated to be approximately 200'-300' or more AGL, approximately 3 miles west northwest from west boundary of Phoenix Rgnl Arpt.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:**

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N32°59.50' W111°55.23' 162° 26.6 NM to fld.
1182/12E. HIWAS

PHOENIX SKY HARBOR INTL (PHX) 3 E UTC-7 N33°26.06' W112°00.70'

PHOENIX

1135 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks

H-41, L-5B, A

LRA Class I, ARFF Index D NOTAM FILE PHX

IAP, AD

RWY 08-26: H11489X150 (CONC-GRVD) S-30, D-170, ST-175, DT-280, DDT-620 HIRL

RWY 08: MALSF. PAPI(P4L)—GA 3.0° TCH 71'. Thld displcd 898'. Building.

RWY 26: REIL. PAPI(P4L)—GA 3.0° TCH 70'. Road. Rgt tfc.

RWY 07L-25R: H10300X150 (CONC-GRVD) S-30, D-200, ST-175, DT-400, DDT-620 HIRL

RWY 07L: MALSR. PAPI(P4L)—GA 3.0° TCH 73'. Pole. Rgt tfc.

RWY 25R: PAPI(P4L)—GA 3.0° TCH 55'. Antenna.

RWY 07R-25L: H7800X150 (CONC-GRVD) S-30, D-200, ST-175, DT-400, DDT-620 HIRL

RWY 07R: MALSR. PAPI(P4L)—GA 3.0° TCH 57'.

RWY 25L: MALSR. PAPI(P4L)—GA 3.0° TCH 49'. Antenna.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08: TORA-11489 TODA-11489 ASDA-11489 LDA-10591

RWY 26: TORA-11489 TODA-11489 ASDA-11489 LDA-11489

AIRPORT REMARKS: Attended continuously. Bird activity within 10 miles of arpt up to 10,000' MSL. PAEW invof Terminals 2, 3 and 4.

Training by civil turbojet acft prohibited except PPR. No

experimental flight or ground demonstration without written approval of aviation director phone 602-273-2072.

ASDE-X Surveillance System in use: Pilots should operate transponders with Mode C on all twys and rwys.

TPA—2135(1000) lgt acft and non-turbo jets; 2635(1500) heavy acft and turbojets. Noise abatement procedures are in effect at all times contact 602-273-4300 for more information. Acft engine run-up for maintenance prohibited exc PPR. Ctc duty supervisory (602) 273-2008. No engine runs on arpt between 0600-1200Z. Rwy 07L touchdown and Rwy 25R rollout rwy visual range avbl. Twy R and portions of Twy S and Twy T directly bto the twr are non-visible areas from the twr. Phoenix Twr unable to provide ATC services to acft while on Twr R, and portions of Twy S and Twy T. Twy A between Twy A1 and Twy A10 rstd to acft wingspan 125' or less. Twy D rstd to acft wingspan 171' or less. Twy D between intersections Twy D8 and Twy D9 rstd to acft with wingspan 135' or less. Landing fee. Overnight parking fee. Fee for all charters, travel clubs and certain revenue producing aircraft. Flight Notification Service (ADCUS) available. NOTE: See Special

Notices—Continuous Power Facilities.

WEATHER DATA SOURCES: ASOS (602) 231-8557. TDWR.

COMMUNICATIONS: D-ATIS 127.575

RCO 122.6 122.2 (PRESCOTT RADIO)

- ① **APP/DEP CON** 124.1 (119°-138° 7500'-14,500') (192°-263° 7500'-12,500') 119.2 (319°-057° 7500' and abv) 120.7 (319°-057° bto 7500') 123.7 (119°-138° bto 7500') (139°-191° bto 8500') 124.9 (058°-118° bto 10,500') 126.8 (058°-118° 10,500' and abv) (119°-138° abv 14,500') (139°-191° 8500' and above) (192°-263° abv 12,500')

TOWER 118.7 (Rwy 08-26) 120.9 (Rwy 07R-25L and Rwy 07L-25R) **GND CON** 119.75 (North) 132.55 (South)

CLNC DEL 118.1

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 260° 2.1 NM to fld. 1182/12E. HIWAS.

ILS/DME 111.75 I-SYQ Chan 54(Y) Rwy 08. Class IT. LOC back course unusable.

ILS/DME 111.75 I-CWJ Chan 54(Y) Rwy 26. Class IB. LOC back course unusable.


ILS/DME 110.75 I-AHA Chan 44 (Y) Rwy 07R. Class IB. DME also serves RJG ILS Rwy 25L.

ILS/DME 111.5 I-PHX Chan 52 Rwy 07L. Class IA. LOC front course unusable byd 15° left and rgt of centerline. LOC unusable within 0.3 NM of rwy thld.

ILS/DME 110.75 I-RJG Chan 44 (Y) Rwy 25L. Class IE. LOC unusable byd 25° left and right of course. DME unusable 0.6 NM inbound (Phoenix Sky Harbor Intl ILS apch only). DME also serves AHA ILS Rwy 07R.

• • • • •
HELIPAD H1: H60X60 (CONC)

HELIPORT REMARKS: Helipad H1 weight bearing capacity 12,000 lbs gross weight.

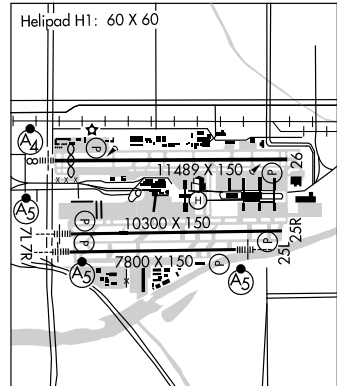

PHOENIX-MESA GATEWAY

(IWA) 9 E UTC-7 N33°18.47' W111°39.33'

PHOENIX

1382 B S1 FUEL 100LL, JET A OX 3, 4 TPA—See Remarks Class I, ARFF Index C
 NOTAM FILE IWA

H-41, L-5B, A
 IAP, AD

RWY 12R-30L: H10401X150 (CONC) S-55, D-95, ST-120, DT-185, DDT-550 MIRL

RWY 12R: Rgt tfc. 0.3% up.

RWY 30L: 0.3% down.

RWY 12C-30C: H10201X150 (CONC-ASPH) S-55, D-95, ST-120, DT-185, DDT-550 HIRL

RWY 12C: PAPI(P4L)—GA 3.0° TCH 50'. 0.3% up.

RWY 30C: PAPI(P4L)—GA 3.00° TCH 41'. 0.3% down.

RWY 12L-30R: H9301X150 (CONC) S-75, D-210, ST-175, DT-590, DDT-850 HIRL

RWY 12L: REIL. PAPI(P4L)—GA 3.0° TCH 74'. 0.3% up.

RWY 30R: REIL. PAPI(P4L)—GA 3.0°. TCH 75'. Rgt tfc. 0.3% down.

AIRPORT REMARKS: Attended continuously. Fuel avbl continuously ctc 480-988-7770 or 129.875. Be alert for crop dusting activity at or below 2000' MSL 3 miles west of the apch end of Rwy 12R. Be alert for crop dusting activity at or below 2000' MSL between 2 and 3 miles on apch for Rwy 30R, Rwy 30L and Rwy 30C.

Occasional wildlife invof arpt. Rwy 12C first 1000' conc, Rwy 30C first 3500' conc, remaining center portion asph. All VFR transitions ctc twr on 124.75. Large/heavy acft taxi with inboard engines only. Twy W rstd to acft with wing span less than 118'.

Twy Y rstd to acft with wing span less than 79'. 7' chain link fence on southern portion of middle ramp.

Voluntary noise abatement procedures in effect. Avoid low overflight of noise sensitive areas surrounding arpt.

For noise abatement information ctc arpt 480-988-7637 between 1300-0500Z or 480-988-7700 between 0500-1300Z. TPA—Fixed Wing 2600(1218), Jet 3100(1718), Rotorcraft 2100(718). No ldg fee for U.S.

Government owned, non-revenue and flight training acft up to 35,000 lbs. For REIL Rwy 12L and Rwy 30R ctc twr.

WEATHER DATA SOURCES: AWOS-3 133.5 (480) 988-9428. HIWAS 113.3 IWA.

COMMUNICATIONS: CTAF 120.6 ATIS 133.5

® PHOENIX APP/DEP CON 124.9


GATEWAY TOWER 118.8 (Helicopter) 120.6 (West) 124.75 (East) 1300-0400Z GND CON 128.25
 CLNC DEL 135.05

AIRSPACE: CLASS D svc 1300-0400Z other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' at fld. 1370/13E. HIWAS.

ILS 110.15 I-IWA Rwy 30C. Class IE. LOC unusable byd 25° left of course. Back course unusable.

**PIMA****FLYING J RANCH**

(E37) 4 SW UTC-7 N32°50.87' W109°52.90'

PHOENIX

3114 NOTAM FILE PRC

RWY 18-36: 2950X45 (DIRT)

RWY 18: Brush. RWY 36: Brush.

RWY 07-25: 1650X48 (DIRT)

AIRPORT REMARKS: Attended continuously. Rwy 18-36 28' power pole 67' west of rwy 700' north of Rwy 36 thld. Rwy 18-36 north 800' extremely rough, rutted and has large rocks. Drop-offs on sides of both rwys and ends. Rwy 18-36 4'-6' brush in primary surface, both sides. Rwy 18-36 south 540' 45' wide, north 240' 80' wide. Arpt gate access code 1229.

COMMUNICATIONS: CTAF 122.9

PINAL AIRPARK

(See MARANA)

PLEASANT VALLEY (See PEORIA)**POLACCA** (P10) 3 SW UTC-7 N35°47.50' W110°25.40'**DENVER**

5573 TPA-6398(825) NOTAM FILE PRC

L-86**RWY 04-22:** H4200X50 (ASPH) LIRL**RWY 04:** Brush. **RWY 22:** Brush.

AIRPORT REMARKS: Unattended. Rwy 04-22 in poor condition, has numerous cracks and holes. Rwy 04-22 has 1-3' brush 45' from centerline both sides full length of rwy. Road crossing rwy. Wash in safety zone. This arpt underlies a Military Operations Area (MOA). Pilots need to be aware of all restrictions and check for any NOTAMS in advance of flying through the MOA.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:****TUBA CITY (H) VORTAC** 113.5 TBC Chan 82 N36°07.28' W111°16.18' 100° 45.7 NM to fld. 4960/15E.**PRESCOTT****ERNEST A. LOVE FLD** (PRC) 7 N UTC-7 N34°39.27' W112°25.18'**PHOENIX**

5045 B S4 FUEL 100LL, JET A TPA-See Remarks Class I, ARFF Index A

H-41, L-8F

NOTAM FILE PRC


IAP, AD**RWY 03R-21L:** H7616X150 (ASPH-PFC) S-63, D-80, ST-101, DT-100 MIRL 1.0% up SW**RWY 03R:** REIL. PAPI(P4L)-GA 4.0° TCH 45'. Thld dsplcd 788'.

Road. Rgt tfc.

RWY 21L: MALSR. REIL. PAPI(P4L)-GA 3.0° TCH 45'. Rgt tfc.**RWY 03L-21R:** H4848X60 (ASPH) S-12.5 MIRL 0.8% up SW**RWY 03L:** PAPI(P2L)-GA 3.0° TCH 40'. Thld dsplcd 811'.**RWY 21R:** PAPI(P2L)-GA 3.0° TCH 40'. Rgt tfc.**RWY 12-30:** H4408X75 (ASPH) S-12.5 MIRL 0.6% up SE**RWY 12:** REIL. PAPI(P2L)-GA 3.0° TCH 48'. Thld dsplcd 150'.**RWY 30:** REIL. PAPI(P2L)-GA 3.0° TCH 40'.**LAND AND HOLD SHORT OPERATIONS**

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 21L	12-30	5150

AIRPORT REMARKS: Attended 1100-0700Z. Fuel avbl 1400-0400Z call 928-443-9333. After hrs avbl per advance request. Rwy 03L-21R CLOSED 0500-1300Z. Wildlife invof rwys and twys. Acft departing Rwy 21L continue rwy heading until across highway and make immediate left turn. 20' drop off 300' from apch end Rwy 12. Rwy 21L designated calm wind rwy. Twy D1 restricted to acft 12,500 pounds or less. Overnight parking fee. Ldg fee for tran commercial acft 12,500 lbs or greater based upon maximum certificated ldg weight. TPA for light acft all rwys 6045(1000). TPA for large acft, all turbo prop/jet and high performance acft all rwys 6545(1500). Voluntary noise abatement procedures in effect-ctc arpt opr 928-771-1150. After 0500Z ACTIVATE MIRL Rwy 03R-21L-CTAF. ACTIVATE MIRL Rwy 12-30 frequency 128.75. NOTE: See Special Notices-Extensive Flight Training in the vicinity of Ernest A. Love Field, Prescott, AZ.

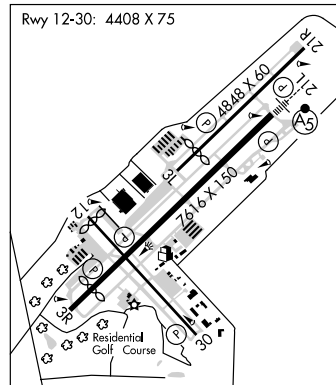WEATHER DATA SOURCES: ASOS (928)717-1287.**COMMUNICATIONS:** CTAF 125.3 ATIS 127.2 UNICOM 122.95**PRESCOTT RCO** 122.4 122.2 (PRESCOTT RADIO)**ALBUQUERQUE CENTER APP/DEP CON** 128.45**PRESCOTT TOWER** 125.3 (1300-0500Z) **GND CON** 121.7**AIRSPACE:** CLASS D svc (1300-0500Z) other times Class E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.**DRAKE (H) VORTACW** 114.1 DRK Chan 88 N34°42.15' W112°28.82' 120° 4.2 NM to fld. 4963/14E.**ILS/DME** 108.5 I-PRC Chan 22 Rwy 21L. Class IA. **ILS/DME** unmonitored 0500-1300Z.**COMM/NAV/WEATHER REMARKS:** Ctc Prescott Radio for airport advisory service on 125.3 when twr is clsd.**ROBLES** N32°04.44' W111°21.62' NOTAM FILE PRC.**PHOENIX****NDB (MHW)** 220 RBJ 070° 10.2 NM to Ryan Fld.**L-5C****ROLLE AIRFIELD** (See SAN LUIS)**RYAN FLD** (See TUCSON)

SAFFORD RGNL (SAD) 3 E UTC-7 N32°51.20' W109°38.11'

3179 B S2 FUEL 100LL, JET A, A1+ TPA-4179(1000) NOTAM FILE SAD

RWY 12-30: H6006X100 (ASPH) S-33 MIRL

RWY 12: PAPI(P2L)—GA 3.0° TCH 37'. Fence.

RWY 30: PAPI(P2L)—GA 3.0° TCH 36'.

RWY 08-26: H4800X75 (ASPH) S-23 MIRL 0.4% up E

RWY 08: PAPI(P2L). Fence. RWY 26: PAPI(P2L).

AIRPORT REMARKS: Attended Mon-Sat 1430-0030Z and Sun

1430-2230Z. Fuel avbl after hrs contact (928) 552-0543. Traffic invof agriculture strip 1 mile SW of arpt.

WEATHER DATA SOURCES: ASOS 124.175 (928) 428-5178.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.3 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 134.45

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

SAN SIMON (H) VORTACW 115.4 SSO Chan 101 N32°16.16'

W109°15.79' 319° 39.7 NM to fld. 3600/13E. HIWAS.


• • • • •

HELIPAD H1: H72X72 (CONC) MIRL

PHOENIX

H-4J, L-5C

IAP

**ST JOHNS INDUSTRIAL AIR PARK** (SJN) 1 N UTC-7 N34°31.11' W109°22.73'

5737 B S2 FUEL 100LL, JET A, MOGAS TPA-6736(1000) NOTAM FILE SJN

RWY 14-32: H5322X75 (ASPH) S-90 MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Pole.

RWY 32: REIL. PAPI(P2R)—GA 3.0° TCH 40'. Thld dsplcd 92'. Pole.

RWY 03-21: H3400X60 (ASPH) S-55 MIRL

RWY 03: Thld dsplcd 190'. Tree.

AIRPORT REMARKS: Attended 1400-0000Z. Rwy 03 200' gravel clear

area on S end of rwy. Twy parallel to Rwy 14-32 has reflectors entire length of twy on both sides. Rwy 32 calm wind rwy.

WEATHER DATA SOURCES: ASOS 134.225 (928) 337-3061.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.1R 112.3T (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.


(H) VORTAC 112.3 SJN Chan 70 N34°25.44' W109°08.61'

284° 13.0 NM to fld. 6840/12E.

PHOENIX

H-4J, L-8H

IAP

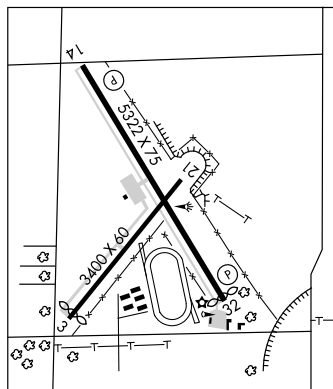**SAN CARLOS APACHE** (See GLOBE)**SAN LUIS****ROLLE AIRFIELD** (44A) 5 ENE UTC-7 N32°30.98' W114°41.90'

163 NOTAM FILE PRC

RWY 17-35: H2800X60 (ASPH)

AIRPORT REMARKS: Unattended. Arpt unlgtd-frequent ngt military flights conducted. Arpt fenced and

locked-inaccessible from ground. For access ctc arpt manager 928-726-5882. Oil treated area surrounding existing paved rwy is heavily rutted. Mil ops require prior permission. Call 928-726-5882 ext 156.

COMMUNICATIONS: CTAF 122.9

PHOENIX

SAN MANUEL (E77) 2 NW UTC-7 N32°38.19' W110°38.84'

PHOENIX

3274 FUEL 100LL NOTAM FILE PRC

L-5C

RWY 11-29: H4200X75 (ASPH) S-12

RWY 29: Rgt t/c.


AIRPORT REMARKS: Unattended. Airport CLOSED 0300-1300Z daily.

Self svc fuel with credit card. Livestock on and invof arpt. Rwy 11 has 6' gully 300' from thld. Rwy 29 has 6' sloped drop off 90' right of centerline 165' from thld extending out to 325' from thld.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71'

W110°54.89' 011° 35.1 NM to fld. 2672/12E. HIWAS.

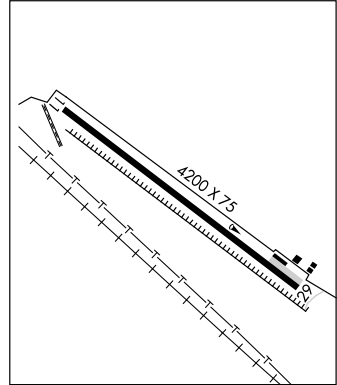**SAN SIMON** N32°16.16' W109°15.79' NOTAM FILE PRC.

PHOENIX

(H) VORTACW 115.4 SSO Chan 101 319° 39.7 NM to Safford Rgnl. 3600/13E. HIWAS.

H-4J, L-5D

VORTAC unusable:

020°-050°beyond 30 NM below 8000'

150°-190°beyond 28 NM below 11,300'

190°-220°beyond 30 NM below 9000'

235°-250°beyond 30 NM below 9900'

350°-360°beyond 30 NM below 8000'.

SCOTTSDALE (SDL) 9 N UTC-7 N33°37.37' W111°54.63'

PHOENIX

1510 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks NOTAM FILE SDL

H-4J, L-5B, A

RWY 03-21: H8249X100 (ASPH) S-45, D-75, ST-95 MIRL

IAP, AD


RWY 03: REIL. PAPI(P2L)—GA 4.0° TCH 36'. Thld displcd 739'.

Road. 0.7% up.

RWY 21: REIL. PAPI(P2L)—GA 4.0° TCH 45'. Thld displcd 400'. Tree.

Rgt t/c. 0.9% down.

AIRPORT REMARKS: Attended 1200-0500Z. Coyotes occasionally crossing Rwy 03-21 and twys. Hawks invof Rwy 03-21. All military acft provide 24 hr advance notice prior to arrival, call arpt ops 480-312-8478. Rwy 03-21 and Twys A and B designed for acft with wingspan of 79' or less. Twy C limited to acft with wingspan less than 63 ft. Rwy 03-21 200' blast pad both ends. Access gates to industrial airpark limited to acft with wingspan less than 63 ft. Rwy 03-21 limited to acft not exceeding 75,000 pounds certificated maximum tkf weight dual wheel, 45,000 pounds certificated maximum tkf weight single wheel. Transient ldg fee for acft 12,500 pounds or greater (Based on maximum certificated tkf weight.) Transient overnight parking fee. U.S. Customs user fee arpt. Touch and go ldg permitted between 1300-0430Z only. No midfield departures on Rwy 03 or Rwy 21. Voluntary noise abatement curfew 0500-1300Z. Extremely noise sensitive areas all quadrants. For noise abatement information call 480-312-8478. No maintenance runups between 0500-1400Z. Rwy 03 preferred for calm wind and noise abatement. TPA-prop 2500(990) Jet 3000(1490) Helicopter 2000(490). When twr clsd ACTIVATE MIRL Rwy 03-21, PAPI Rwy 03 and Rwy 21, REIL Rwy 03 and Rwy 21—CTAF.

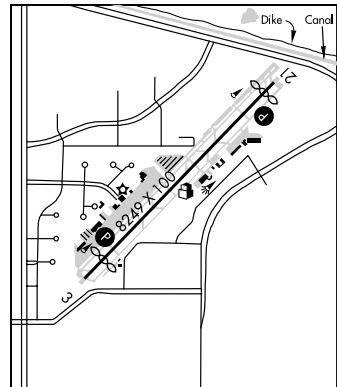**WEATHER DATA SOURCES:** ASOS (480) 483-3049. LAWRS.**COMMUNICATIONS:** CTAF 119.9 ATIS 118.6 (480) 998-5144.

PHOENIX RCO 122.6 122.2 (PRESCOTT RADIO)

® PHOENIX APP/DEP CON 120.7

TOWER 119.9 (1300-0400Z) GND CON 121.6 CLNC DEL 124.8

AIRSPACE: CLASS D svc 1300-0400Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 003° 11.8 NM to fld.

1182/12E. HIWAS.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

SEDONA (SEZ) 2 SW UTC-7 N34°50.92' W111°47.31'

4830 B S2 FUEL 100LL, JET A TPA—See Remarks NOTAM FILE SEZ

RWY 03-21: H5132X100 (ASPH) S-15, D-30 MIRL 1.8% up NE

RWY 03: REIL. PAPI(P4L)—GA 3.5° TCH 46'.

RWY 21: REIL. PAPI(P4L)—GA 3.5° TCH 46'.

AIRPORT REMARKS: Attended May-Sep 1400-0100Z, Oct-Apr 1500-000Z. Turbulence may be experienced in/ovf arpt. When ldg Rwy 21, during strong southwest wind conditions, strong down drafts are very probable northeast of apch end of Rwy 21. Helicopter ops restricted to helipads adjacent to twy intersection A7 SW main terminal building. Helicopter operating from private helipads S and W of Rwy 03-21. No touch and go lds noise sensitive area. Noise sensitive area avoid scenic flights bto 6500' MSL. Overnight transient fee for all users. Landing fee for turbine acft without fuel purchase. TPA—prop 6003(1173) Jet 7003(2173). ACTIVATE MIRL Rwy 03-21, REIL Rwy 03 and REIL Rwy 21—CTAF. PAPI Rwy 03 and PAPI Rwy 21 opr continuously.

WEATHER DATA SOURCES: AWOS-2 118.525 (928) 282-1993.

COMMUNICATIONS: CTAF/UNICOM 123.0


MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

® ALBUQUERQUE APP/DEP CON 124.5

RADIO AIDS TO NAVIGATION: NOTAM FILE FLG.

FLAGSTAFF (H) VOR/DME 113.85 FLG Chan 85(Y) N35°08.83' W111°40.45' 184° 18.8 NM to fld.
7026/14E.

.....
HELIPAD H1: H50X50 (CONC)



PHOENIX

H-41, L-86

IAP

SELIGMAN (P23) 1 NW UTC-7 N35°20.10' W112°53.18'

5235 B NOTAM FILE PRC

RWY 04-22: H4800X75 (ASPH) MIRL

RWY 04: REIL. PAPI(P2L)—GA 3.0°. Fence.

RWY 22: REIL. PAPI(P2L)—GA 3.0°. Rgt tfc.

AIRPORT REMARKS: Unattended. Drainage channel both sides full length of Rwy 04-22, varies in width and depth.

Drainage channel 65' wide, 4-10' deep located 200-265' from AER 22. ACTIVATE MIRL Rwy 04-22 REIL Rwy 04 and Rwy 22 7-clicks—CTAF. PAPI Rwy 04 and Rwy 22 opr dalgt hrs, at night ACTIVATED on CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PEACH SPRINGS (H) VORTACW 112.0 PGS Chan 57 N35°37.48' W113°32.67' 103° 36.6 NM to fld.
4760/15E. HIWAS.

SELLS (E78) 2 NW UTC-7 N31°55.96' W111°53.66'

2409 NOTAM FILE PRC

RWY 04-22: H5830X60 (ASPH) S-12.5


RWY 04: Trees. RWY 22: Trees.

AIRPORT REMARKS: Unattended. Rwy 04-22 width 60' in some areas narrower due to bushes growing thru pavement. Livestock on and in/ovf arpt. Rwy 04-22 15' to 18' trees and brush in primary sfc entire length of rwy. Rwy 04-22 3' ditches along rwy edges. Rwy 04-22 marked with 6" yellow centerline stripe only, markings faded. No rwy numbers.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 247° 50.9 NM to fld. 2672/12E. HIWAS.



PHOENIX

H-41, L-5B

SHOW LOW RGNL (SOW) 2 E UTC-7 N34°15.93' W110°00.34'

PHOENIX

6415 B S2 FUEL 100LL, JET A TPA-7215(800) Class III, ARFF Index A

H-41, L-5C, 8G

NOTAM FILE SOW

IAP

RWY 06-24: H7200X100 (ASPH) S-35 D-60 MIRL

RWY 06: REIL. PAPI(P2L)—GA 3.0° TCH 30'. Thld dsplcd 700'. Pole.

RWY 24: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Thld dsplcd 750'. Rgt tfc.

RWY 03-21: H3937X60 (ASPH) 0.3% up SW

RWY 03: Rgt tfc.

AIRPORT REMARKS: Attended Apr-Sep 1300-0300Z, Oct-Mar 1400-0200Z. Self-service fuel avbl continuous. Military tfc invof arpt. Simultaneous ops Rwy 21 and Rwy 24 prohibited. Rwy 06-24 and Rwy 03-21 not connected by pavement at AER 21. Overnight transient fees and commercial opr ldg fees applicable. ACTIVATE MIRL Rwy 06-24-123.0.


WEATHER DATA SOURCES: AWOS-3 118.075 (928) 532-0379.**COMMUNICATIONS:** CTAF/UNICOM 123.0**ALBUQUERQUE CENTER APP/DEP CON** 132.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 246° 43.9 NM to fld. 6840/12E.

NDB (MHW) 206 SOW N34°16.04' W110°00.49' at fld. NOTAM

FILE SOW.

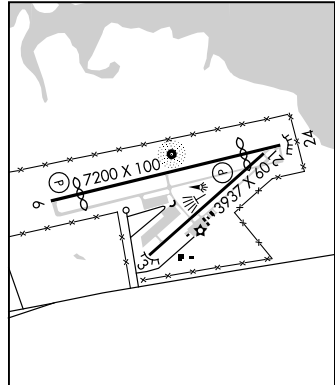**SIERRA VISTA MUNI-LIBBY AAF** (See FORT HUACHUCA-SIERRA VISTA)**SPRINGERVILLE MUNI** (D68) 1 W UTC-7 N34°07.77' W109°18.65'

PHOENIX

7055 B FUEL 100LL, JET A NOTAM FILE PRC

H-41, L-5D

RWY 03-21: H8422X75 (ASPH) S-30 MIRL

IAP

RWY 03: PAPI(P2L)—GA 4.0° TCH 35'. Fence. 0.4% down.

RWY 21: PAPI(P2L)—GA 3.0° TCH 35'. Fence. Rgt tfc. 0.6% up.

RWY 11-29: H4603X60 (ASPH) MIRL

RWY 11: PAPI (P2L)—GA 3.0° TCH 35'.


RWY 29: PAPI (P2L)—GA 3.0° TCH 35'.

AIRPORT REMARKS: Attended Oct-May 1500-0000Z, Jun-Sep 1400-0100Z. For fuel after hrs call 928-245-0151. Wildlife on and invof arpt. ACTIVATE MIRL Rwy 03-21 and Rwy 11-29-CTAF. PAPIs Rwy 03, Rwy 21, and Rwy 11, Rwy 29 on during daylight hrs, after dusk ACTIVATE-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.65 (928) 333-5716.**COMMUNICATIONS:** CTAF/UNICOM 122.8® **ALBUQUERQUE CENTER APP/DEP CON** 132.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 193° 19.5 NM to fld. 6840/12E.

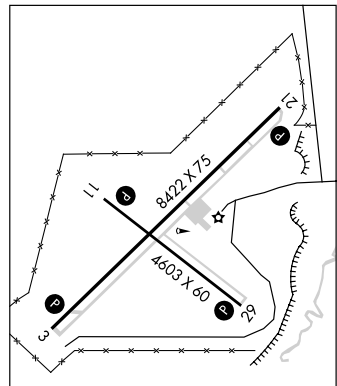**STANFIELD** N32°53.15' W111°54.52' NOTAM FILE PRC.

PHOENIX

(H) VORTAC 114.8 TFD Chan 95 048° 8.3 NM to Casa Grande Muni. 1316/12E.

H-41, L-5B, A

RCO 122.1R 114.8T (PRESCOTT RADIO)

STELLAR AIRPARK (See CHANDLER)**SUN VALLEY** (See BULLHEAD CITY)

SUPERIOR MUNI (E81) 2 SW UTC-7 N33°16.67' W111°07.62'

PHOENIX

2646 NOTAM FILE PRC

RWY 04-22: 3250X75 (GRVL)

RWY 04: Brush.

RWY 22: Tree.

AIRPORT REMARKS: Unattended. Emerg phone 520-689-5254 (Police). Arpt manager recommends ldg uphill to the NE. Rwy 04-22 loose gravel, large rocks and 1-2' weeds on rwy sfc. Rwy 04-22 has brush and trees to a height of 12' on both sides of rwy. Mountain 4375' MSL located 9000' W of Rwy 04. Livestock on and invof arpt.

Obstructions brush NE rwy, terrain and smelter stacks NE, hills and mountain SSW through SW of arpt.

COMMUNICATIONS: CTAF/UNICOM 122.95

TAYLOR (TYL) 2 SW UTC-7 N34°27.16' W110°06.90'

PHOENIX

5823 B S2 FUEL 100LL NOTAM FILE PRC

H-4J, L-86

RWY 03-21: H7000X75 (ASPH) MIRL 1.5% up SW

IAP

RWY 03: REIL. PAPI(P2L)-GA 4.0° TCH 36'. Pole.

RWY 21: REIL. PAPI(P2L)-GA 3.0° TCH 20'.

AIRPORT REMARKS: Attended Mon-Fri daltg hrs. +75' trees 450' east of rwy centerline. Arpt bcn not visible ENE to ESE due to trees. For FBO ctc 928-536-4811. Trees and brush in primary surface NW side of rwy 130'-250' from centerline. Rwy 03 right side REIL OTS indef. Rwy 21 REIL OTS indef. ACTIVATE MIRL Rwy 03-21—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.075 (928) 536-2609.


COMMUNICATIONS: CTAF/UNICOM 122.7

® ALBUQUERQUE CENTER APP/DEP CON 132.9

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 260° 48.2 NM to fld. 6840/12E.



TEMPLE BAR (U30) 1 SW UTC-7 N36°01.23' W114°20.10'

LAS VEGAS

1549 NOTAM FILE PRC

L-7E

RWY 18-36: H3500X50 (ASPH) S-10

RWY 18: Rgt tfc.

RWY 36: P-line.

AIRPORT REMARKS: Unattended. Wildlife on and invof arpt. Be alert for loose rock on north turn-a-round. Be alert to pavement washed out to a depth of 6-8 inches under east tiedown cable. Rwy 18-36 20' berm 180' west along full length of rwy. Rwy 18-36 grass growing through numerous cracks east 10' of rwy. Ldg is recommended uphill to the S. Do not use tie down area as parallel twy, back taxi on rwy.


COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE RNO.

BOULDER CITY (H) VORTACW 116.7 BLD Chan 114 N35°59.75'

W114°51.82' 072° 25.8 NM to fld. 3650/15E. HIWAS.

COMM/NAV/WEATHER REMARKS: Call 122.8 for transportation.



TOMBSTONE MUNI (P29) 3 SE UTC-7 N31°40.28' W110°01.29'

PHOENIX

4743 NOTAM FILE PRC

L-5C

RWY 06-24: H4430X60 (ASPH)

RWY 06: Brush.

RWY 24: Brush.

AIRPORT REMARKS: Unattended. Numerous trees and bushes between 1 and 15' in height within primary surface. Rwy 06-24 has 2-4' vegetation along both sides of rwy.

COMMUNICATIONS: CTAF 122.9

TUBA CITY (TØ3) 5W UTC-7 N36°05.56' W111°22.99'

LAS VEGAS

4513 B NOTAM FILE PRC

H-41, L-86

RWY 15-33: H6230X75 (ASPH) S-12.5 MIRL

RWY 15: PAPI(P2L)—GA 3.0° TCH 40'. Thld dspcd 1520'. Hill.

RWY 33: PAPI(P2L)—GA 3.0° TCH 40'. Brush.


AIRPORT REMARKS: Unattended. Rwy 15-33 very uneven and cracked rwy pavement first 1520' when ldg to south. Rwy 15-33 S half of rwy centerline missing. Livestock on airport. PAPI Rwy 15 OTS indef. For gate entry call Indian Health Svc, Tuba City 928-283-2827.

COMMUNICATIONS: CTAF 122.9

RCO 122.05R 113.5T (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

(H) VORTAC 113.5 TBC Chan 82 N36°07.28' W111°16.18' 238° 5.8 NM to fld. 4960/15E.

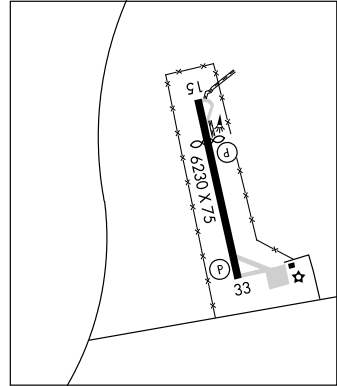

TUCSON

MARANA RGNL (AVQ) 15 NW UTC-7 N32°24.57' W111°13.10'

PHOENIX

2031 B S3 **FUEL** 100LL, JET A OX 3 NOTAM FILE PRC

H-41, L-5C

RWY 12-30: H6901X100 (ASPH) S-75, D-100, ST-160, DT-300 MIRL 0.3% up SE.

IAP

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 44'.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road. Rgt tfc.

RWY 03-21: H3892X75 (ASPH) S-75, D-100, ST-135, DT-150 MIRL

RWY 03: PAPI(P2L)—GA 3.0° TCH 53'. Thld dspcd 494'. Rgt tfc.

RWY 21: PAPI(P2L)—GA 3.0° TCH 40'.

AIRPORT REMARKS: Attended 1400-0030Z. Fuel avbl after hrs call 520-730-4318. Parachute Jumping. Aerobatic activities 3 miles SE and 6 miles SW of arpt, surface -5000' MSL dalgt hours indefinitely. Extensive parachute training high and low levels all hours NW quadrant of arpt. Helicopters are not authorized to land at the self fuel island. All helicopters must land at the helipad at the SE side of the field. Rwy 12 calm wind rwy. ACTIVATE MIRL Rwy 03-21 and Rwy 12-30, REIL Rwy 12 and Rwy 30—CTAF. PAPI Rwy 03, Rwy 21, Rwy 12 and Rwy 30 opr continuously. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.

WEATHER DATA SOURCES: AWOS-3 118.375 (520) 682-4104.

COMMUNICATIONS: CTAF/UNICOM 123.0


(R) TUCSON APP/DEP CON 119.4

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 309° 24.3 NM to fld. 2672/12E.

HIWAS.

NDB (HW) 245 AVQ N32°24.71' W111°12.94' at fld. NOTAM FILE PRC.

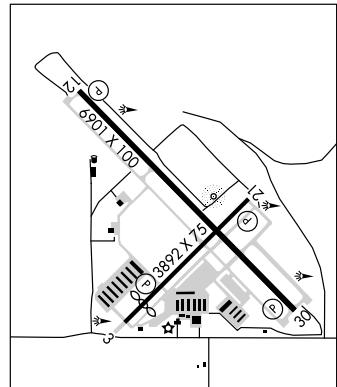

RYAN FLD (RYN) 10 SW UTC-7 N32°08.53' W111°10.48'

2417 B S4 **FUEL** 100LL, JET A TPA-3217(800) NOTAM FILE PRC

RWY 06R-24L: H5500X75 (ASPH) S-12.5, D-30 MRL

RWY 06R: REIL. **RWY 24L:** VASI(V4L)—GA 3.0° TCH 26'.

RWY 06L-24R: H4900X75 (ASPH) S-12.5, D-30

RWY 06L: Tree.

RWY 15-33: H4000X75 (ASPH) 0.8% up S

RWY 15: Tree.

AIRPORT REMARKS: Attended 1430-2230Z. Self svc fuel avbl 24 hrs.

Rwy 06L-24R CLOSED between SS-SR. Rwy 15-33 CLOSED between SS-SR. Frequent practice of ILS approaches to Rwy 06R. Rwy 06R and Rwy 06L preferential rwy up to 10 knot tailwind.

Afternoon winds usually favor Rwy 24L and Rwy 24R. Use landing lights in pattern. When twr clsd ACTIVATE MRL Rwy 06R-24L—CTAF. VASI Rwy 24L opr continuously. REIL Rwy 06R opr dalgt hrs only. Note: See Special Notices—Glider Operations Northwest of Tucson, Arizona.

WEATHER DATA SOURCES: AWOS-3 133.35 (520) 578-0269. HIWAS 116.0 TUS.

COMMUNICATIONS: CTAF 125.8

® **TUCSON APP/DEP CON** 128.5

TOWER 125.8 (1300-0300Z) **GND CON** 118.2

AIRSPACE: CLASS D svc 1300-0300Z other times CLASS E.


RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

TUCSON (H) VORTACW 116.0 TUS Chan 107 N32°05.71' W110°54.89' 270° 13.5 NM to fld. 2672/12E.

HIWAS.

NDB (HW) 338 RYN N32°08.30' W111°09.69' at fld. NOTAM FILE PRC. Unmonitored. NDB unusable 025°-050° byd 25 NM blo 14,500'.

ILS 111.1 I-IVI Rwy 06R.



PHOENIX

H-41, L-5C

IAP, AD

TUCSON INTL (TUS) 6 S UTC-7 N32°06.97' W110°56.46'

2643 B S4 FUEL 100LL, JET A OX 1, 2, 3, 4 TPA—See Remarks

AOE Class I, ARFF Index C NOTAM FILE TUS

RWY 11L-29R: H10996X150 (ASPH-GRVD) S-160, D-200, ST-175, DT-350, DDT-585 HIRL

RWY 11L: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. 0.7% up.

RWY 29R: REIL. PAPI (P4L)—GA 3.0° TCH 76'. Ground. 0.5% down.

RWY 11R-29L: H8408X75 (ASPH) S-120, D-140, ST-175, DT-220 MIRL

RWY 11R: PAPI(P4L)—GA 3.0°. Thld dspcd 1410'. Rgt tfc. 0.7% up.

RWY 29L: REIL. Pole. 0.6% down.

RWY 03-21: H7000X150 (ASPH-GRVD) S-105, D-137, ST-174, DT-230, DDT-500 MIRL

RWY 03: Thld dspcd 841'. Railroad. Arresting device.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 55'. Rgt tfc. Arresting device.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-7000 TODA-7000 ASDA-7000 LDA-6160

RWY 21: TORA-6000 TODA-7000 ASDA-6000 LDA-6000

ARRESTING GEAR/SYSTEM

RWY 03 ←E5 (403')

RWY 11L → BAK-12B (1220' OVRN)

BAK-14 BAK-12B(B) (1000')

BAK-14 BAK-12B(B) (1215') BAK-12B(B) (128'OVRN) **RWY 29R**

AIRPORT REMARKS: Attended continuously. Air carriers use Rwy 11L-29R. Rwy 11R-29L rstd to acft with wing span less than 73' and ldg speed less than 120 kt. Acft dep Rwy 11R required to attain at least 400'AGL prior to starting turn. No B-747 training except PPR; no flight training 0500-1300Z except PPR, call Flightline Office 520-573-8128. Rwy 11L-29R gross weight limit: DC-10-10 315,000 lbs, DC-10-30/40 400,000 lbs, L-1011-1 325,000 lbs, L-1011-100/200 340,000 lbs. Rwy 03-21 gross weight limit: DC-10-10 300,000 lbs DC-10-30/40 375,000 lbs, L-1011-01 310,000 lbs, L-1011-100/200 315,000 lbs. TPA-3443 (800) small acft, 4043 (1400) large/heavy turbojet acft. B-747 acft taxi with inboard engines only. Rwy 11L touchdown runway visual range avbl. Twy T-general aviation twy 30,000 lbs. or less. Twy C from Twy A5 to Twy A8 and from Twy A8 to Twy A13 clsd to fixed wing acft. Portions of Twy D not visible from twr due to hangars. REIL Rwy 29L and Rwy 29R dalgt hrs only. Ldg fee. Flight Notification Service (ADCUS) avbl. NOTE: See Special Notices—Glider Operations Northwest of Tucson, Arizona, U.S. Special Customs Requirement.

WEATHER DATA SOURCES: ASOS (520) 889-7236. **HIWAS** 116.0 TUS. LLWAS.

COMMUNICATIONS: ATIS 123.8 (520) 741-1177 **UNICOM** 122.95

TUCSON RCO 122.2 (PRESCOTT RADIO)

MOUNT LEMMON RCO 122.4 (PRESCOTT RADIO)

Ⓡ **APP/DEP CON** 125.1 (Rwy 11 090°-285°) (Rwy 29 275°-065°) 119.4 (Rwy 11 286°-089°) (Rwy 29 066°-274°)

TOWER 118.3 119.0 **GND CON** 124.4 **CLNC DEL** 126.65

AIRSPACE: CLASS C svc ctc **APP CON**

RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.

(H) **VORTACW** 116.0 TUS Chan 107 N32°05.71' W110°54.89' 301° 1.8 NM to fld. 2672/12E. **HIWAS.**

VORTAC unusable:


050°-080° beyond 30 NM below 13,000'

350°-020° beyond 30 NM below 13,000'

DME unusable:

155°-165° byd 35 NM blo 13,000'.

ILS/DME 111.7 I-TUS Chan 54 Rwy 11L. LOC back course unusable byd 15 NM blo 7,200'. Back course unusable byd 10° right of course.

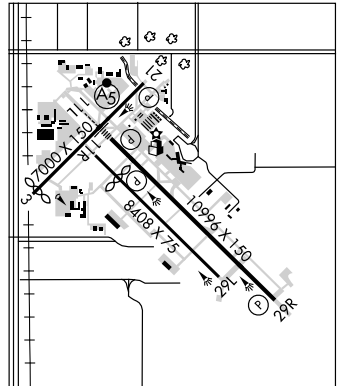

VALLE See (GRAND CANYON)

WHITERIVER (E24) 1 SW UTC-7 N33°48.64' W109°59.14'

PHOENIX

5153 B NOTAM FILE PRC

H-41, L-5C

RWY 01-19: H6350X75 (ASPH) S-16 MIRL

RWY 01: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Rgt tfc.

RWY 19: REIL. Thld dspcd 250'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 01: TORA-6100 TODA-6350 ASDA-6100 LDA-6100

RWY 19: TORA-6350 TODA-6350 ASDA-6350 LDA-6100

AIRPORT REMARKS: Attended April-Oct, Mon-Fri, 1400-0030Z and Nov-Mar, Mon-Fri 1500-2330Z. Watch for joggers on arpt. Mountains all quadrants. Heavy canyon winds. Heavy fire suppression work Mar-Oct.


COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE SJN.

ST. JOHNS (H) VORTAC 112.3 SJN Chan 70 N34°25.44'

W109°08.61' 217° 55.8 NM to fld. 6840/12E.

COMM/NAV/WEATHER REMARKS: UNICOM monitored by USDOl during fire season only May-August.



WHITMORE

GRAND CANYON BAR TEN AIRSTRIP (1Z1) 60 SE UTC-7 N36°15.39' W113°13.85'

LAS VEGAS

4100 FUEL JET A NOTAM FILE PRC

RWY 16-34: 4600X40 (DIRT)

RWY 16: Hill. **RWY 34:** Hill.

AIRPORT REMARKS: Attended May-Oct dalgt hrs. Nov-Apr unattended. For arpt information ctc arpt manager 435-628-4010. Watch for livestock on rwy. Rwy 16 first 2500' paved with chip seal. Ldg fee.

COMMUNICATIONS: CTAF 122.9

WICKENBURG MUNI (E25) 3 W UTC-7 N33°58.24' W112°47.71'

PHOENIX

2377 B S2 FUEL 100LL, JET A TPA-3377(1000) NOTAM FILE PRC

H-41, L-5B, 8F, A

RWY 05-23: H6100X75 (ASPH) S-16 MIRL 1.0% up SW

RWY 05: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Ground.

RWY 23: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Rgt tfc.

AIRPORT REMARKS: Attended 1500-0000Z. After hrs ctc 928-684-4926. Self-fueling avbl 24 hrs. Jet A also avbl by truck. ACTIVATE MIRL Rwy 05-23 REIL Rwy 05, REIL Rwy 23 and twy lgts—CTAF. PAPI Rwy 05 and PAPI Rwy 23 on from dawn to dusk. ACTIVATE PAPI Rwy 05 and PAPI Rwy 23 dusk-dawn—CTAF.


WEATHER DATA SOURCES: AWOS-3 121.375 (928) 684-2487.

COMMUNICATIONS: CTAF/UNICOM 123.0

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

BUCKEYE (L) VORTAC 110.6 BXX Chan 43 N33°27.21'

W112°49.48' 349° 31.0 NM to fld. 1060/14E.

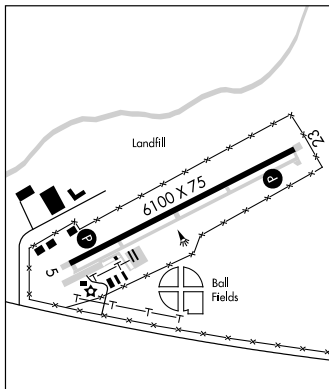

WILLCOX

COCHISE CO (P33) 3 W UTC-7 N32°14.73' W109°53.68'

4187 B S2 FUEL 100LL, JET A NOTAM FILE PRC

RWY 03-21: H6095X75 (ASPH) S-50, D-75, DT-135 MIRL

AIRPORT REMARKS: Attended 1500-0000Z, CLOSED holidays. Runway 21 two thld lgts broken, three runway lgts missing. Parallel twy to Rwy 03-21 in failed condition. Twy condition poor. Large cracks in apron. Preferred calm wind Rwy 21.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.1R 115.8T (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 134.45

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

(H) VORTAC 115.8 CIE Chan 105 N32°02.00'
W109°45.49' 318° 14.5 NM to fld. 4230/13E.

VORTAC unusable:

005°-015° byd 35 NM blo 10,000'

015°–030° byd 25 NM blo 10,000'

030°-040° byd 35 NM blo 10,000'

220°–240° byd 25 NM blo 9,200'

VOR unusable:


190°–205° byd 37 NM all altitudes

205°–220° byd 30 NM blo 9,000'

DME unusable:

190°–220° byd 30 NM blo 9,000'

PHOENIX
H-4J, L-5C
IAP



WILLIAMS

H. A. CLARK MEM FLD (CMR) 3 N UTC-7 N35°18.33' W112°11.66'

6680 B NOTAM FILE PRC

RWY 18-36: H5992X100 (ASPH) MIRL

RWY 18: REIL. PAPI(P2L)—GA 3.0 TCH 40'. Tree.

RWY 36: REIL. PAPI(P2L)—GA 3.0 TCH 40'. Rock.

AIRPORT REMARKS: Attended 1400–0200Z. Retro reflectors on parallel twy. ACTIVATE MIRL Rwy 18–36, PAPI Rwy 18 and Rwy 36, REIL Rwy 18 and Rwy 36—CTAF.

WEATHER DATA SOURCES: AWOS-3 121.125 (928) 635-1278.


COMMUNICATIONS: CTAF/UNICOM 122.8

MINGUS MOUNTAIN RCO 122.3 (PRESCOTT RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE FLG.

FLAGSTAFF (H) VOR/DME 113.85 FLG Chan 85(Y) N35°08.83'
W111°40.45' 276° 27.3 NM to fld. 7026/14E.

PHOENIX
H-4I, L-8F



WILLIE N33°18.19' W111°39.09' NOTAM FILE IWA.

(L) VORTACW 113.3 IWA Chan 80 at Phoenix-Mesa Gateway. 1370/13E. HIWAS.

VOR unusable:

320°–300° byd 20 NM blo 7.500'

300°–320° byd 25 NM blo 7.500'

DME unusable:

020°-055° byd 30 NM blo 12.000'.

PHOENIX
H-4I, L-5B

WINDOW ROCK (RQE) 1 S UTC-7 N35°39.12' W109°04.04'

6742 B NOTAM FILE RQE

RWY 02-20: H7000X75 (ASPH) S-30, D-45, DT-75 MIRL 0.6% up NE

RWY 02: REIL. PAPI(P2L)—GA 3.0° TCH 36'. Hill.

RWY 20: Trees. Rgt tfc.

AIRPORT REMARKS: Attended Mon-Fri 1500-0000Z. Twys and ramp clsd to Gulf Stream acft 2, 3, 4, and 5. ACTIVATE MIRL Rwy 02-20 and REIL Rwy 02—CTAF.

WEATHER DATA SOURCES: ASOS 118.325 (928) 871-3421.**COMMUNICATIONS:** CTAF/UNICOM 122.8

KAYENTA RCO 122.45 (PRESCOTT RADIO)

⑧ ALBUQUERQUE CENTER APP/DEP CON 124.325

RADIO AIDS TO NAVIGATION: NOTAM FILE GUP.


GALLUP (H) VORTAC 115.1 GUP Chan 98 N35°28.56'

W108°52.36' 304° 14.2 NM to fld. 7053/14E.

DENVER

H-41, L-8H

IAP

**WINSLOW-LINDBERGH RGNL** (INW) 1 W UTC-7 N35°01.32' W110°43.35'

4941 B S2 FUEL 100LL, JET A TPA-5941(1000) NOTAM FILE INW

RWY 04-22: H7499X150 (ASPH) S-50, D-80, ST-102, DT-125 MIRL 0.8% up SW

RWY 04: Pole.

RWY 22: REIL. VASI(V4L)—GA 3.0° TCH 26'. Thld dsplcd 1262'.

Poles.

RWY 11-29: H7100X150 (ASPH) S-60, D-70, ST-89, DT-110

MIRL 0.4% up NW

RWY 11: REIL. VASI(V4L)—GA 3.0° TCH 40'. Tree. Rgt tfc.

RWY 29: VASI(V4L)—GA 3.0° TCH 26'. Thld dsplcd 385'. Tower.

AIRPORT REMARKS: Attended 1400-0100Z. Rwy 11 end marked by NSTD painting and lighting. Dsplcd thlds Rwy 22 and Rwy 29 are marked by NSTD painting and lighting. Southwest corner of Forest Service ramp clsd. ACTIVATE MIRL Rwy 04-22 and Rwy 11-29, REIL Rwy 11 and Rwy 22—CTAF. VASI Rwy 22, Rwy 11 and Rwy 29 opr continuously. Landing fee for commercial aircraft. Overnight tiedown fee.

WEATHER DATA SOURCES: ASOS 118.875 (928) 289-0134. HIWAS 112.6 INW.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.6 (PRESCOTT RADIO)

ALBUQUERQUE CENTER APP/DEP CON 124.5


AIRSPACE: CLASS E svc 1100-0600Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE INW.

(H) VORTACW 112.6 INW Chan 73 N35°03.70' W110°47.70' 110° 4.3 NM to fld. 4910/14E. HIWAS.

PHOENIX

H-41, L-8G

IAP



YUMA MCAS-YUMA INTL (NYL)(KNYL) CIV/MIL 3 S UTC-7 N32°39.40' W114°36.36'

PHOENIX

213 B S2 FUEL 100, JET A OX 1, 2, 3, 4 TPA—See Remarks AOE Class I, ARFF Index A H-41, L-SA
NOTAM FILE NYL IAP, DIAP, AD

RWY 03L-21R: H13300X200 (CONC) S-103, D-200, DT-400 PCN 72 R/B/W/T HIRL

RWY 03L: PAPI(P4L). Rgt tfc. RWY 21R: MALSR. PAPI(P4L).

RWY 03R-21L: H9239X150 (ASPH-CONC) S-162, D-200, DT-400
PCN 52 F/B/W/T HIRL

RWY 03R: PAPI (P4L). Antenna. Rgt tfc.

RWY 21L: PAPI(P4L). Road.

RWY 08-26: H6146X150 (ASPH-CONC) S-63, D-137, DT-206 PCN
38 F/B/W/T HIRL

RWY 08: Road. Rgt tfc. RWY 26: Road.

RWY 17-35: H5710X150 (ASPH-CONC) S-72, D-171, DT-255 PCN
27 F/B/W/T HIRL

RWY 17: VASI(V4L)—GA 3.0° TCH 40'. Tree. Rgt tfc.

RWY 35: REIL. Brush.

ARRESTING GEAR/SYSTEM

RWY 03L HOOK E28(B) (3495') HOOK E28(B) (1698') RWY 21R

RWY 03R HOOK E28(B) (2725') HOOK E28(B) (1675') RWY 21L

MILITARY SERVICE: JASU 1(NC-10) 1(NCPP-105) FUEL J5(Mil) Avbl on
request for shipbound acft. J8(MIL) (NC-100, A) (1330-0130Z,
other times 30 min prior notice, svc fee \$50, C928-726-1116)
(NC-100). FLUID LOX LHNT LPOX OII O-156 TRAN ALERTExtremely limited tran svc/parking/ transportation, no maintenance mil acft. Local mil fit prohibited from tran
line Sat, Sun and holidays without specific approval Station Commander. Tran svc avbl Mon-Fri 1430-0530Z,
Sat 1500-2300Z, no tran svc Sun and holiday.

AIRPORT REMARKS: Attended 1100-0800Z. Fuel on call 24 hours. CAUTION: Extensive jet training operations, exercise increased vigilance. Heavy bird migration Nov thru Mar. Mandatory all general aviation and air carrier acft opr VFR enter arpt tfc area at 1200' MSL when assigned Rwy 08-26 or Rwy 17-35. All acft avoid overflit Mexican border 7 NM W of arpt. Tfc patterns for Rwys 03L/R and 21R/L overlap tfc patterns for Rwys 08-26 and 17-35. TPA Rwys 08-26 and 17-35 1200(984). TPA Rwys 03L/R and 21R/L 1700(1484). TPA for civil turbo-jet acft assigned Rwy 03L/R or 21R/L 1700(1487), initial altitude 3500' 6 NM, TPA helicopters 700(487). Helicopters required to enter arpt tfc area at TPA—1200(987), then descend to 700' prior to all rwys. Mandatory all departing general aviation and air carrier acft opr VFR fly rwy heading after departure and maintain 1200' MSL until outside arpt tfc area unless otherwise approved by tower. Extensive military jet opr from 4000-3000' MSL descending to 1700' MSL within 6 NM SW straight-in Rwys 03L/R and within 6 NM NE straight-in Rwy 21R/L. Ambulances operating between 0500-1300Z needing ground access etc Civil Airport Authority C928-941-2396 or 376-5868. When twr clsd, ACTIVATE HIRL Rwy 08-26 and Rwy 17-35 and Twys A, A1, A2, B, C, L, and Z—CTAF. Flight Notification Service (ADCUS) available. U.S. Customs port of entry contact 928-344-9572. Civil arpt ops contact 928-726-5882 x 160. NOTE: See Special Notices—U.S. Special Customs Requirement.

MILITARY REMARKS: Opr Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z, CLOSED holidays. See FLIP AP/1.

Supplementary Arpt Information. Military arpt ops-928-269-2325. RSTD Fit clnc manned during mil opr hr DSN 269-2326/2323/2077. C928-269-2326/2323/2077. PPR all transient acft, 24 hr prior notice. DSN 269-2445/2760, C928-269-2445/2760. AV8B vertical/short take-off and landing to Rwy 03-21 may have priority Mon-Fri over military multiple practice apch.

COMMUNICATIONS: CTAF 119.3 ATIS 118.8 273.2 (Mon-Fri 1430-0530Z, Sat 1500-2300Z, no Sun, no holiday. Other times by NOTAM). UNICOM 122.95

YUMA RCD 122.6 (SAN DIEGO RADIO)

YUMA RCD 122.2 (PRESCOTT RADIO)

① APP CON 124.7 DEP CON 125.55 281.0

TOWER 119.3 382.8 361.2 (Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z. CLOSED holiday. GND CON 121.9 315.7
CLNC DEL 118.0 336.4

COMD POST 337.9 PMSV METRO 120.725 349.9

VFR ADVSY SVC 124.7 (1400-0600Z, other times check NOTAMS).


AIRSPACE: CLASS D svc (Mon-Fri 1430-0530Z, Sat-Sun 1700-0100Z. CLOSED holiday. Other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE SAN.

BARD (H) VORTAC 116.8 BZA Chan 115 N32°46.09' W114°36.17' 167° 6.7 NM to fld. 130/14E.


(L) TACAN Chan 84 NYL (113.7) N32°38.81' W114°36.81' at fld. 193/14E.

ILS 108.3 I-YUM Rwy 21R. Class IE. Localizer unusable byd 25° east and byd 25° west of localizer course.

ASR/PAR

COMM/NAV/WEATHER REMARKS: Radar see Terminal FLIP for Radar Minima.

YUMA PROVING GROUND (See LAGUNA AAF)

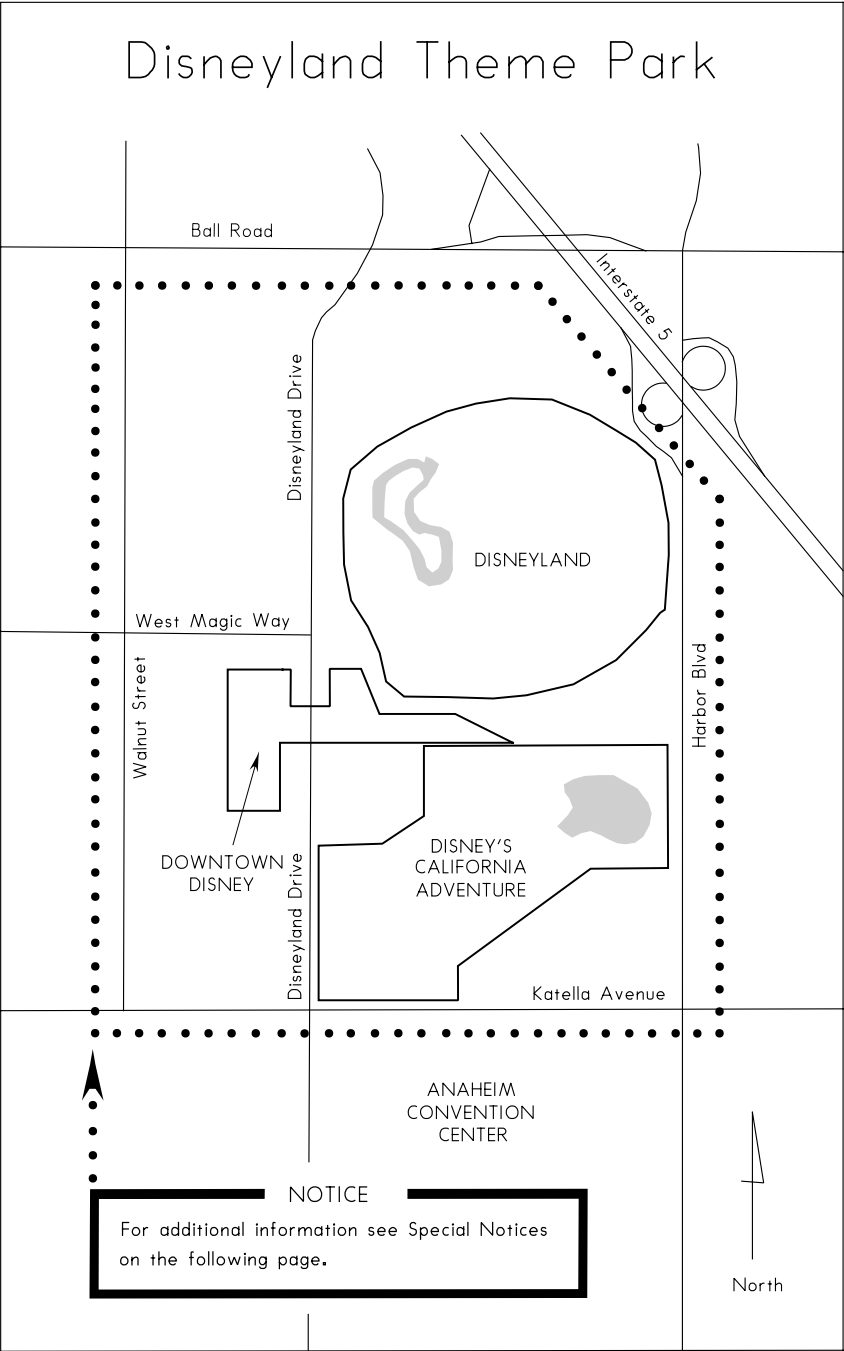

DISNEYLAND THEME PARK**NOTICE**

Pursuant to Public Law 108-199, Section 521, aircraft flight operations are prohibited at and below 3,000 feet AGL within a 3 nautical mile radius of the Disneyland Theme Park (334805N/1175517W or the Seal Beach (SLI) VORTAC 066 degree radial at 6.8 nautical miles). This restriction does not apply to: (A) those aircraft authorized by ATC for operational or safety purposes, including aircraft arriving or departing from an airport using standard air traffic procedures; (B) Department of Defense, law enforcement, or aeromedical flight operations that are in contact with ATC; Those who meet any of the following criteria may apply for a waiver to these restrictions: (A) for operational purposes of the venue, including the transportation of equipment or officials of the governing body; (b) for safety and security purposes of the venue.

LIGHTS-OUT OPERATIONS**Desert/Reveille MOAs, Nevada and Utah**

Lights-out night vision goggle flight training operations conducted within the Desert and Reveille North/South Military Operations Areas (MOAs) at all altitudes, Monday through Friday between sunset and sunrise when the MOAs are active. Traffic advisories are available from the Nellis ATC Facility (Nellis Control) on 126.65 or 124.95.

LIGHTS-OUT OPERATIONS**Lucin/Seveir/Gandy MOAs, Utah**

Lights-out night vision goggle flight training operations conducted within the Lucin, Seveir, and Gandy Military Operations Areas (MOAs) at all altitudes, Monday through Friday between sunset and sunrise when the MOAs are active. Traffic advisories are available from the Clover ATC Facility (Clover Control) on 118.45 or 134.1.

INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS**SAN FRANCISCO INTERNATIONAL AIRPORT (SFO)****SAN FRANCISCO, CALIFORNIA**

San Francisco International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 1R at Taxiway Mike

Runway 10L at Taxiways Romeo or Uniform

Runway 10R at Taxiway Uniform

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runways shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.

INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS**LAS VEGAS-MCCARRAN INTERNATIONAL AIRPORT (LAS)****LAS VEGAS, NEVADA**

Las Vegas-McCarran International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 07L at Taxiways "A8" or Delta

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runway shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.


LOS ANGELES, CA, LOS ANGELES INTERNATIONAL AIRPORT (LAX)**NOISE ABATEMENT PROCEDURES**

Successive or simultaneous departures from Runways 24L/R and Runways 25L/R are authorized, with course divergence beginning within 2 miles from the departure end of parallel runways, due to noise abatement restrictions.

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN SOUTHERN CALIFORNIA

UAS operations are conducted sunrise to sunset within three (3) nautical miles of El Mirage Field Adelanto (N34°37'30", W117°36'20") and Grey Butte (N34°33'55", W117°40'50") at or below 6,000 feet MSL. From sunset to sunrise operations may be conducted within four (4) nautical miles at and below 4,000 feet AGL. Contact Joshua control on 124.55 or 363.0 for activity information and advisory service.

UAS operations may be conducted in accordance with Visual Flight Rules (VFR) accompanied by a chase aircraft below 14,000 feet MSL in an area bounded by N34°58'00" W117°00'00", N34°27'00" W117°00'00", N34°27'00" W117°55'00", N34°48'00" W117°55'00", N34°48'00" W117°35'03", N34°48'30" W117°32'03", N34°50'20" W117°32'03", N34°53'30" W117°11'53", N34°56'20" W117°09'03" thence to point of beginning.

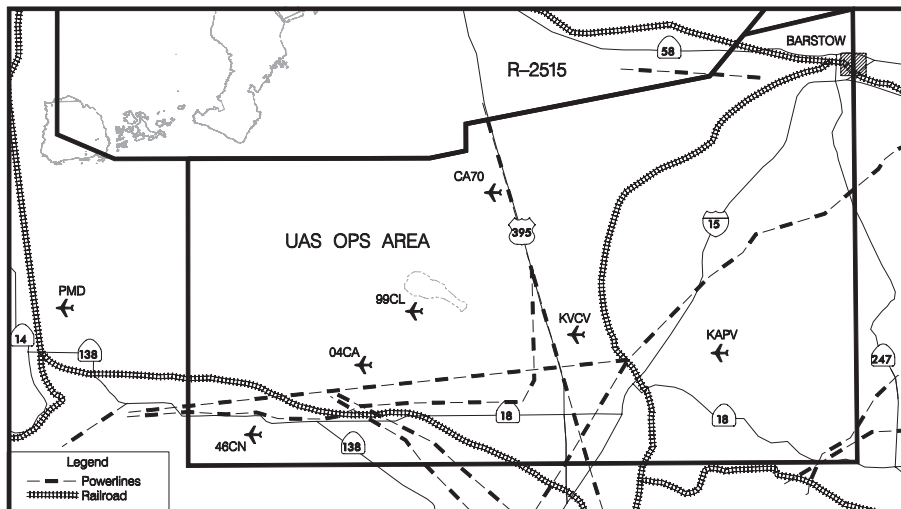

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN NORTHERN NEVADA

UAS operations are continuously conducted within the Fallon Approach Control Airspace and the Fallon Range Training Complex at all altitudes when the Special Use Airspace areas are active. Contact Desert Control on 126.2 MHz. for activity status.

UNMANNED AIRCRAFT SYSTEMS (UAS) OPERATIONS IN NEVADA AND UTAH

There is continuously unmanned aircraft systems flight activity conducted within the desert and reveille military operations areas (MOAs) at all altitudes when the MOAs are active. Traffic advisories are available from the Nellis Air Traffic Control facility (Nellis Control) on 126.65.

MODEL AIRCRAFT ACTIVITY—EL TORO, CALIFORNIA

Model aircraft activity conducted 500' AGL and below, 0.5 NM radius of apch end of Rwy 25L. CLOSED MCAS El Toro, daily 1500–0400Z+. For NOTAM information contact Prescott AFSS on 800–992–7433.

DENVER TERMINAL RADAR APPROACH CONTROL

Denver, Colorado

The Denver Terminal Radar Approach Control has been issued a waiver which enables controllers to assign speed restrictions without obtaining pilot concurrences; e.g., speeds of less than 250 knots below FL280 and speeds of less than 210 knots when the aircraft is greater than 20 flying miles from the threshold of the airport of intended landing.

EXTENSIVE HELICOPTER FLIGHT TRAINING IN THE VICINITY OF ROCKY MOUNTAIN METROPOLITAN AIRPORT (BJC), BROOMFIELD, COLORADO

Frequent usage of Runway 11R–29L, Taxiway D, and the north end of Runway 20 by helicopter flight schools. Pilots are cautioned to listen carefully to ATC for turnoff instructions when landing on Runway 11R–29L. Helicopters flight schools use three primary local procedures: Charlie Two, Ball, and Erie. CHARLIE TWO; Expect departures to the south thence turning to the northwest. Expect arrivals from the northwest. BALL; Expect departures to the south thence turning east. Expect arrivals from the east. ERIE; Expect departures northbound. Expect arrivals from the north.

INTENSE HELICOPTER OPERATIONS LOS ANGELES BASIN AREA, CALIFORNIA

CAUTION: Intense helicopter operation below 2000'AGL. All pilots transitioning the area at or below 2000'AGL are encouraged to make regular position reports on frequency 123.025.

LASER LIGHT DEMONSTRATIONS Anaheim, California

A laser light demonstration will be conducted nightly between sundown and midnight at Disneyland, Anaheim, California (SLI VORTAC 060 radial at 7NM LAT 33°48'40"N/LON 117°55'00"W). The beam may be injurious to eyes if viewed within 300 feet vertically and 600 feet laterally of the light sources. Cockpit illumination-flash blindness may occur beyond these distances.

Knotts Berry Farm Buena Park, California

A permanent laser light demonstration is being conducted at Knotts Berry Farm, 33°49'45"N/117°59'35"W, Seal Beach Vortac SLI 022/005, 0445 to 0600 UTC DLY. Laser light beam may be injurious to pilots/passengers eyes within 800 feet vertically and 1400 feet laterally of the light source. Flash blindness or cockpit illumination may occur beyond these distances.

Long Beach, California

A laser light demonstration will be conducted nightly between sundown and 11 PM at the Pine Avenue Theater Complex, Pine Avenue, Long Beach, California (SLI VORTAC 250 radial at 8NM LAT 33°46'12"N/LON 118°11'30"W). The beam may be injurious to eyes if viewed within 100 feet vertically and 1,900 feet laterally of the light source. Cockpit illumination-flash blindness may occur beyond these distances.

Palomar Observatory

A laser light operation is conducted intermittently between sunset and sunrise at the Palomar Observatory N33-21-22/W 116-51-53, Julian VOR (JLI) 298 degree radial at 19 nautical miles. The laser beam may be injurious to eyes if viewed on axis. Cockpit illumination and flash blindness may also occur if the beam enters the cockpit. Los Angeles ARTCC, (661) 265-8205 is the FAA coordination facility.

San Francisco, California

A Laser Light Demonstration will be conducted nightly between 8:30 pm and 2:00 am at Pier 39, San Francisco, California (SAU VORTAC 100 radial at 12 NM LAT 37°48'40" N; LON 122°24'35" W). The beam may be injurious to Pilots/Passengers' eyes if viewed within 800 feet vertically and 800 feet laterally of the light source. Cockpit illumination-flash blindness may occur beyond these distances.

CHRISTMAN AIRPORT, FORT COLLINS, COLORADO

A laser light operation for testing and alignment is being conducted at Christman Airport, 40°35'24"N/105°08'26"W, GLL VORTAC 270/28NM. This testing is ongoing, intermittently, 24 hours per day 7 days a week. Laser light beams may be injurious to pilot's/passenger's eyes within 4479 feet of the light source, to 8958 feet AGL. The secondary effects of flash blindness or cockpit illumination may occur beyond these distances. Denver TRACON, 303-342-1590 is the FAA coordination facility.

CONTROLLED FIRING AREA (CFA) EAST OF YUMA, AZ

The military has established a controlled firing area (CFA) east of Yuma, AZ. The CFA is bordered by the following fixes: BZA058015 - BZA068035 - BZA072034 - BZA075030 - BZA075015 - BZA058015. Operations will be conducted at or below 3000'AGL. The hours of operation are Monday through Saturday from sunrise to sunset.

SAN DIEGO, CALIFORNIA SOUTHBOUND INTERNATIONAL BORDER CROSSING


Pilots crossing the International border southbound into Mexican airspace, in the vicinity of San Diego, are encouraged to cross Tijuana International Airport at midfield to avoid arriving and departing aircraft. Pilots requesting transition through the Brown Field CLASS D airspace should contact Brown Tower on frequency 126.5. All others should contact Tijuana Approach Control on frequency 119.5 prior to crossing the border. Southbound aircraft are requested to squawk 1260 prior to crossing the border unless otherwise advised by ATC.

EXTENSIVE PARACHUTE DROP ACTIVITIES SAN DIEGO, CALIFORNIA

Use caution when transiting the corridor south of San Diego Class B airspace and north of the international border between the coast and east to the Tecate area. A wide variety of civilian and military aircraft types (Cessna 182-C-130) use this corridor to make high rates of ascent and descent from the surface to 15000 MSL. Note the San Diego, Trident, and Otay Reservoir jumping areas located in this corridor and to the northeast of Brown Field Municipal Airport. Use VHF 121.95 to monitor parachute drop activities.

AEROBATIC OPERATIONS SOUTHEAST OF PHOENIX GOODYEAR AIRPORT, GOODYEAR, ARIZONA

The aerobatic training area center point is located on the Stanfield VOR 300° radial at 26.5 DME. The area exists approximately 2 nautical miles on each side of the TFD VOR 300° radial from 22 to 31 DME, surface to 8000' MSL. Pilots should use caution in this area. Frequency 128.92 is provided for air-to-air communications with pilots using or transiting the area. For information regarding hours of operation, contact 623-932-1650.

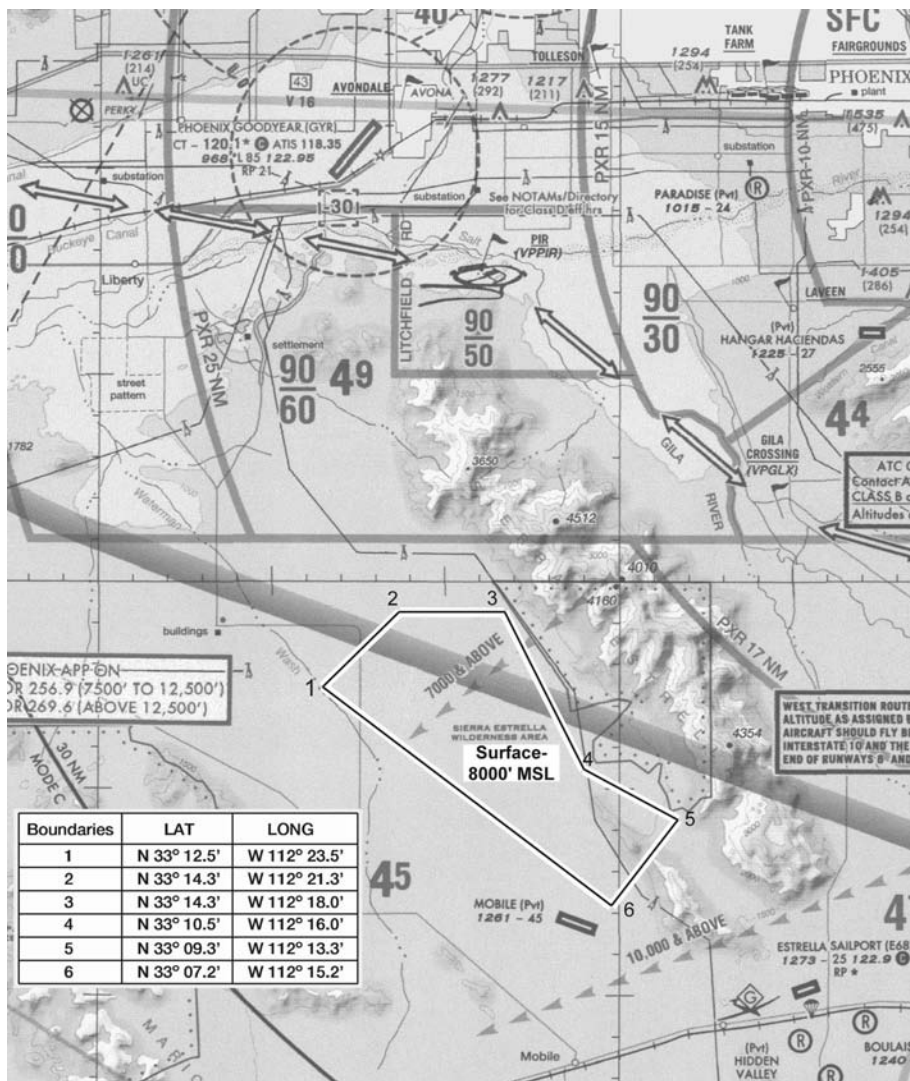

**AEROBATIC PRACTICE AREA
MOUNTAIN VALLEY AIRPORT, TEHACHAPI, CALIFORNIA**

Practice and competitive aerobatic maneuvers regularly scheduled adjacent to south side of Mountain Valley Airport (3 NM long X ½ NM wide), surface to 5000' AGL. The practice area is for waiver holders only. Pilots should use caution when operating within this area. For further information contact VAN NUYS FSDO on 1-818-904-6291.

**Restricted Area R-2305
Gila Bend, Arizona
Transit Information**

A transit route extends from Gila Bend to the Eric Marcus Airport over Arizona Highway 85 at 500 feet above ground level (AGL). VFR rules govern civilian flight through the Goldwater Air Force Range. Aircrac flights will be given priority over all other air traffic other than inflight emergencies. The Aircrac call sign will be used only when the aircraft is on an actual air evacuation mission. Department of Public Safety (DPS) "Ranger" call signs must indicate they are on an Aircrac mission to receive priority. Military aircraft will have priority over all remaining aircraft. Aircraft requesting to transition this airspace may encounter delays.

General aviation aircraft must coordinate their route of flight, departure, and return times with Range Operations prior to departure. Phone (623) 856-8818/8819. Once airborne, aircraft from the north contact Gila Bend AFAT Tower (primary) on 257.65/127.75 (UHF/VHF) or Range Operations (secondary) on 264.125/122.775. Aircraft from the south contact Range Operations 264.125/122.775. Aircraft must hold outside restricted airspace until clearance is granted to transit the area. After receiving clearance into the Restricted Airspace, pilots shall monitor Range Operations frequency.

The preferred VFR procedure will be to fly over Highway 85 at 500 feet AGL, monitoring Range Ops on VHF 122.775. At night aircraft will fly over Highway 85 at or below 1000 feet AGL. Military aircraft on manned ranges will be instructed to remain clear of Highway 85 or to transit the highway 500 feet above altitude of transiting aircraft.

Caution: Due to repeater transmissions and mountainous terrain, flights north of the Saucedo Mountains (Black Gap) will normally only be able to contact Gila Bend Tower. Flights south of the mountains should contact Range Operations. Military aircraft on the Range may be operating lights out.

The normal hours of the Goldwater Air Force Range are from 0630-2400 local Monday through Saturday. When the range is not active, Gila Bend AFAT Tower and Range Operations are closed. If unable to contact the Tower or Range Operations, contact Albuquerque ARTCC on 126.45 or 125.25 for clearance.

LOW ALTITUDE TACTICAL NAVIGATION AREA (LATN) EAST OF TUCSON, AZ

The military has established a Low Altitude Tactical Navigation Area (LATN) east of Tucson bordered by the following fixes: TUS037017-TUS025022-TUS038037-CIE323030-CIE294015-CIE255022-TUS090028-TUS055029-TUS037017. The LATN is not a restricted area and will continue to be available for use by civilian aircraft in accordance with FAA rules and regulations. The primary operations will be conducted by HH-3/MH-60 helicopters from 100 ft AGL to 600 ft AGL. The hours of operations will be daily from 1500-0100Z

SEA WORLD TETHERED BALLOON SAN DIEGO, CALIFORNIA (Until Further Notice)

Tethered balloon 367 MSL DLY 1700-0400, Located on the Mission Bay VORTAC 180 radial at 1 mile (MZB180001).

UNAUTHORIZED TRANSMISSION ARIZONA, CALIFORNIA, AND NEVADA AREA (Until Further Notice)

Attention all aircraft: Be alert to the possibility of UNAUTHORIZED AIR TRAFFIC CLEARANCES issued on ATC frequencies in the Arizona, California, and Nevada areas. If you received a transmission that is questionable verify with AIR TRAFFIC CONTROL.

SAN FRANCISCO INTERNATIONAL AIRPORT EXPANDED CHARTED VISUAL FLIGHT PROCEDURES (Until Further Notice)

GENERAL

San Francisco International Airport (SFO) is subject to stratus moving slowly from West to East, creating a reportable weather ceiling over the airport, while the final approach area for Runways 28R and 28L have no significant ceiling or visibility conditions. And expanded charted visual flight procedure (E/CVFP) has been developed to maximize the level of airport efficiency during the unusual weather conditions described above.

MINIMUMS

The E/CVFP incorporates the following weather minimums:

SFO ceiling 2100 feet and visibility 5 miles; or,
SFO ceiling 1000 feet and visibility 3 miles, and,
visibility 5 miles in the Eastern quadrant (030-120), and,
ceiling 2400 and visibility 5 miles at the automated weather observing system (AWOS) located at BRIJJ

LOM. In the event the AWOS is inoperative, weather at San Carlos (SQL) is required to be at least ceiling 2400 feet and visibility 5 miles.

Although the listed weather minima are in effect aircraft should not expect simultaneous E/CVFP approaches unless BRIJJ AWOS ceiling is at least 3500 feet and visibility is at least 5 miles.

SPACING AND SEQUENCING

Controllers will clear aircraft for the E/CVFP in accordance with the provisions of Order 7110.65, Air Traffic Control. They will not utilize phrases requesting or requiring aircraft to "fly right alongside", "wingtip to wingtip", or "directly abeam" other aircraft. Additionally, controllers will not assign instructions or require aircraft to pass and/or overtake other aircraft on the adjacent final approach course. Preferably, aircraft will be vectored to achieve a slightly staggered position of approximately 1/8 to 1/4 mile behind the aircraft on the adjacent final approach course. Heavy aircraft and B757's will not be authorized to overtake another aircraft on the adjacent final approach course. Wake turbulence cautionary advisories will be issued, as appropriate.

GO-AROUND PROCEDURE

The Tipp Toe and Quiet Bridge approaches are visual approaches, and as such have no missed approach segment. If a go-around is necessary, aircraft will be issued an appropriate advisory/clearance/instruction by the tower or tracon. To ensure standard separation from other traffic, these instructions will include the assignment of a specific heading and altitude. Normally, the following procedures will apply:

Tipp Toe Visual Runway 28L

In the event of a go-around turn left heading 265, climb and maintain 3000; or as directed by Air Traffic Control.

Quiet Bridge Visual Runway 28R

In the event of a go-around turn right heading 310, climb and maintain 3000; or as directed by Air Traffic Control.

AEROBATIC OPERATIONS IN ARIZONA

The following practice and competitive aerobatic areas are in use without notice SR-SS daily.

5 NMR DMA	17,500 and below
2 NMR INW195055/PAN	9,600 and below
1 NM N-S and 7 NM E-W of the PXR017022	6,500 and below
PXR019020	7,500 and below
PXR128013	5,500 and below
1 Square mile of the PXR194023	5,000 and below
1 NMR PXR129018	5,000 and below
1 NMR PXR316026.2	6,600 and below
3 NMR PXR 323024	6,000 and below
2 NM N-S and 4 NM E-W PXR325027	8,000 and below
1 NM Square TFD 3000 18/E60	6,300 and below
1 NMR TFD065025/P08	5,500 and below
1 NMR TFD143021	3,000 and below
4 NMR TFD010020	4,800 and below
1NMR TFD107036	5,000 and below
P08-COOLIDGE	10,000 and below
12 NW of DVT	6,500 and below
5 NMR DRK215013	11,500 and below

Pilots should use caution in these areas. For further information contact Prescott AFSS on 1-800-992-7433.

AEROBATIC OPERATIONS NORTHWEST OF TUCSON, AZ.

Practice and competitive aerobatic maneuvers are regularly scheduled on the Tucson VORTAC 295 radial at 25 miles and Tucson VORTAC 308 radial at 22 miles, sunrise to sunset, up to 5,000 MSL.

AEROBATIC OPERATIONS NORTHEAST OF REDLANDS, CA

Practice and competitive aerobatic maneuvers are regularly scheduled in the vicinity of the PDZ VORTAC 045 radial at 23 nautical miles from 1,500' AGL up to and including 7,500' MSL. The practice area is for waiver holders only. Pilots should use caution in this area. Frequency 123.3 is provided for air-to-air communications with other pilots using or transiting the area.

AEROBATIC OPERATIONS NORTHEAST OF SANTA PAULA, CA

Practice and competitive aerobatic maneuvers are regularly scheduled in the vicinity of FIM VORTAC, SR-SS, 1,500' AGL to 5,500' MSL. The Aerobatic Area is defined by FIM 220/004, to FIM 260/008, to FIM 285/009, to FIM 360/005, to FIM 055/014, to FIM 070/013. The practice area is for waiver holders only. Pilots should use caution in this area. Frequency 122.775 is provided to air-to-air communications with other pilots using or transiting the area.

AEROBATIC OPERATIONS IN COLORADO

Practice and competitive aerobatic maneuvers are regularly conducted during daylight hours at the following locations:

- 2 NM radius GLL 180/009, 10000 MSL and below.
- 1 NM radius Sterling Muni (STK), 4000 AGL and below.
- 1 kilometer square, 800 to 3000 AGL 3 statute miles east of RWY 17-35, Kelly Airpark (C015).
- 1 statute mile square, surface to 4000 AGL. Center of the area is located 2850 feet east of RWY 18-36. Western boundary is 1000 feet from RWY 18-36 and northern boundary is 100 feet from RWY 08-26, Lamar Airport (LAA). The (LAA) ASOS will broadcast aerobatic area information when this area is active. For further information, contact Flight Services 1-800-WX-BRIEF.
- 1 kilometer square, 5000 AGL .5 statute mile east of Ft. Morgan Muni (FMM).
- 1 NM radius GLL 315/006, 10000 MSL and below. 6.2 statute miles northwest of Vance Brand (LMO) Mon-Sat 1500-2359, Sun 1600-2359.

AEROBATIC PRACTICE AREA JEAN AIRPORT, JEAN, NEVADA

Aerobatic flight activity will be conducted within a 3300' square box, located 2 miles west of Jean Airport (Specific area of operation is ½ mile radius from a point described by the LAS 190/20). Flights will occur from SFC to 6500 MSL, between 1 hour after sunrise to 1 hour before sunset daily. Pilots should use caution when operating within this area. To obtain a copy of the Certificate of Waiver outlining appropriate procedures for utilization of the practice area, ctc Henderson Executive Airport at (702) 261-4800.

**AEROBATIC PRACTICE AREA
VAUGHN MUNICIPAL AIRPORT (N17), VAUGHN, NEW MEXICO**

Aerobatic practice will be conducted within a 3 NM radius of the Vaughn Municipal Airport (N17), SFC to 11,000 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992)-7433).

**EXTENSIVE FLIGHT TRAINING IN VICINITY OF
ERNEST A. LOVE FIELD, PRESCOTT, ARIZONA**

Extensive flight training activity in areas 5 to 38 miles from the Prescott Airport 14,000 MSL and below. These areas are in use from sunrise to sunset daily. Participating traffic reports on 123.5.

**EXTENSIVE FLIGHT TRAINING IN VICINITY OF
ANGWIN-PARRETT FIELD (203), ANGWIN, CALIFORNIA**

Extensive flight training activity within a 10 NM radius of STS056024 (MAUCH INT), 4,500 MSL and below. This area is in use from 1400-0300 UTC daily. Participating traffic reports on 123.0.

**EXTENSIVE FLIGHT TRAINING IN VICINITY
OF PROVO MUNICIPAL AIRPORT**

Extensive flight training activity in areas 5 to 30 miles S & W of Provo Municipal Airport from the PVU260R-PVU150R, 9,000 MSL and below. These areas are in use from 1100Z to 0400Z Monday thru Saturday; participating traffic contact Eagle Base on 123.5.

UNMANNED AIRCRAFT SYSTEMS, SOUTHEASTERN, AZ

Unmanned aircraft system activity along the international border in southeastern Arizona. Pilots flying near the international border between Nogales, Arizona and the New Mexico border should be alert for unmanned aircraft systems operating from 14,000' MSL to 16,000' MSL inclusive, 0000-1500 UTC daily.

ROCKET FIRING SOUTHEAST OF RENO, NEVADA

Rocket firing occurs approximately on the Mustang VORTAC 107 radial at 7 miles, normally seven days a week, sunrise to sunset, up to but not including 1,000 ft above ground level.

GLIDER OPERATIONS NORTHWEST OF TUCSON, ARIZONA

There is regularly scheduled glider/soaring activity conducted from El Tiro Airport, which is located approximately on the Tucson VORTAC (116.0 MHz) 297° radial at 31 nautical miles: this is south of Pinal (Marana) Airport and bordered by V16, V66, and V105. Activity at El Tiro is normally scheduled for Saturday, Sunday, and Wednesday, with much of the soaring conducted near the intersection of V66 and V105 at altitudes up to, but not including flight level 180.

CAUTION-TETHERED AEROSTAT RADAR SYSTEM (TARS)

A TARS (a large helium-filled balloon) operates continuously up to 15,000 feet, except during inclement weather or when the system is down for maintenance, in R-2312 near Fort Huachuca, Arizona. The tether is unmarked and is virtually impossible to see from only a few hundred feet. See the Phoenix Sectional Chart for location.

YOSEMITE NATIONAL PARK

Public law prohibits flight of VFR helicopters or fixed-wing acft below 2000 feet above the surface of Yosemite National Park. "Surface" refers to the highest terrain within the park within 2000 feet laterally of the route of flight or, within the Yosemite Valley, the uppermost rim of the valley.

CALIFORNIA CONDORS

Central California Coast Ranges

California Condors are currently being reintroduced to the Central California Coast by the Ventana Wilderness Society. There are two release sites; one below Anderson Peak near Big Sur (BSR VOR radial 150, 2 NM), the other in the Pinnacles National Monument (SNS VOR radial 099, 24 NM). California Condors can be identified in the air by their distinctive size and flight patterns. Like the Turkey Vulture, the California Condor is a large black bird with a naked head which uses topography and associated wind patterns for soaring flight. However, the California Condor is nearly twice as large as the Turkey Vulture, with a wingspan approaching ten feet. Condors normally soar at altitudes between 500 and 6,000 feet AGL. They have been known to fly up to 190 miles in a single day and could therefore be found over a very large area. Please be alert for the presence of these highly endangered birds throughout the Coastal Range from Mt Hamilton near San Jose, south to the Simi Valley, near Fillmore VOR (FIM), as well as the foothills along the west side of the San Joaquin Valley. For further information contact the Ventana Wilderness Society at 831-455-9514.

CALIFORNIA CONDORS

Pinnacles National Monument

California Condors are the largest land birds in North America and are currently being reintroduced at Pinnacles National Monument in central California. Weighing 15–25 pounds and with a wingspan of 9.5 feet, this endangered species presents a formidable in-flight hazard. Condors are capable of soaring at an altitude of 15,000 feet, although they are more often found between altitudes of 2,000–9,000 feet. Using GPS tracking devices on four condors, a high-use condor flight area was identified over Pinnacles National Monument. The Monument is requesting a clearance of 3,000 feet AGL over an approximately 11.5 square mile area, as indicated, where these and other condors are consistently soaring. Monument personnel hope that such a restriction will be a manageable compromise for the continued conservation of this endangered species and the safety of all pilots. For further information, please contact Pinnacles National Monument at (831) 389-4485.

GRAND CANYON

SPECIAL FLIGHT RULES AREA

Effective on September 22, 1988

GRAND CANYON—Special Flight Rules Area, SFAR-50-2. Special regulations apply to all aircraft operations below 14,500 feet MSL. Except in an emergency or if otherwise authorized by the Las Vegas Flight Standards District Office for certain limited operations, remain at or above the following altitudes: a) in the Eastern sector from Lees Ferry to North Canyon at 5,000 feet MSL; b) in the Eastern sector from North Canyon to Boundary Ridge at 6,000 feet MSL; c) in the Central sector from Boundary Ridge to Supai Point at 10,000 feet MSL; d) in the Central sector from Supai Point to Diamond Creek at 9,000 feet MSL; e) in the Western sector from Diamond Creek to the Grand Wash Cliffs at 8,000 feet MSL. In flight corridors use the following altitudes: northbound at 11,500 or 13,500 feet MSL; southbound at 10,500 or 12,500 feet MSL. Remain clear of the indicated flight-free zones.

CAUTION: High volume of tour operations within the area. The procedures do not relieve pilots from see-and-avoid responsibility or compliance with FAR 91.119. Pilots should contact a local FSS for NOTAM information prior to flight within the Special Flight Rules Area. Utilize the Las Vegas (LAS) altimeter setting west of Mt. Dellenbaugh and the Grand Canyon (GCN) altimeter setting east of Mt. Dellenbaugh. Monitor the frequencies indicated for each sector (Western-121.95; Central-127.05; Eastern-120.05). Refer to the Grand Canyon sectional chart and NOTAMS for additional information.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows:

North Atlantic area:	123.45 MHz
Caribbean area:	123.45 MHz
Pacific area:	123.45 MHz

U.S. SPECIAL CUSTOMS REQUIREMENT

Air Commerce Regulations of the Treasury Department's Customs Service require all private aircraft arriving in the U.S. from a foreign place in the Western Hemisphere, (a) south of 33 degrees north latitude which cross into the U.S. over a point on the U.S./Mexican border between 97 and 120 degrees west longitude, or (b) south of 31 degrees north latitude which enter the U.S. via the Gulf of Mexico and Atlantic Coasts, to provide notice of intended arrival to the Customs Service at least one hour prior to crossing the U.S./Mexican border or the U.S. coastline. This notice may be provided by: (1) radio through an appropriate FAA Flight Service Station, (2) normal FAA flight plan notification procedures (a flight plan filed in Mexico does not meet this requirement due to unreliable relay of data), or (3) directly to the District Director of Customs or other Customs officer at place of first intended landing. Unless an exemption has been granted by Customs, private aircraft are required to make first landing in the U.S. at one of the following designated airports nearest to the point of border or coastline crossing:

Brownsville/South Padre Island International, Corpus Christi International, Del Rio International, El Paso International, Laredo International, Maverick County Memorial International, McAllen Miller International, Presidio-Lely International, Southwest Texas Regional, or William P. Hobby Airport of Texas; Calexico International, or Brown Field Municipal in California; Bisbee Douglas International, Nogales International, Tuscon International, or Yuma MCAS/Yuma International in Arizona; Las Cruces Intl in New Mexico; Lakefront or Louis Armstrong New Orleans Intl in Louisiana; Fort Lauderdale Executive, Fort Lauderdale-Hollywood International, Key West International, Miami International, Opa-Locka Executive Airport, Palm Beach International, St. Lucie County International, or Tampa International in Florida.

MILITARY TRAINING ROUTES

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data for military users.

CIVIL USE OF MILITARY FIELDS

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission.

Army installations, prior permission is required from the Commanding Officer of the installation.

For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded direct to Hq USAF (PRPOC), Washington, D.C. 20330.

Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the Commanding Officer of the field.

When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

AIRCRAFT LANDING RESTRICTIONS

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated public use airport or seaplane base.

Landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

FAR-PART 139 CERTIFICATED AIRPORTS

Additional Certificated Airports
not contained in this Directory

NAME OF AIRPORT	IDENT	INDEX
	NEVADA	
TONOPAH, Tonopah Test Range	TNX	E

CONTINUOUS POWER FACILITIES

In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply.

In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been included in this program for a selected runway.

1. ILS(Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)
2. Wind Measuring Capability
3. Approach Light System (ALS) or Short ALS (SALS)
4. Ceiling Measuring Capability
5. Touchdown Zone Lighting (TDZL)
6. Centerline Lighting (CL)
7. Runway Visual Range (RVR)
8. High Intensity Runway Lighting (HIRL)
9. Taxiway Lighting
10. Apron Light (Perimeter Only)

The following have been designated "Continuous Power Airports," and have independent back up capability for the equipment installed.

Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Anchorage, AK (ANC)	07R	Minneapolis, MN (MSP)	30L
Andrews AFB, MD (ADW)	01L	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA)	14R
Chicago, IL (ORD)	14R	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R
Indianapolis, IN (IND)	05L	Tampa, FL (TPA)	36L
Jacksonville, FL (JAX)	07	Tulsa, OK (TUL)	36R
Kansas City, MO (MCI)	19R	Washington, DC (DCA)	01
Los Angeles, CA (LAX)	24R	Washington, DC (IAD)	01R
Memphis, TN (MEM)	36L	Wichita, KS (ICT)	01L
Miami, FL (MIA)	08R		

NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

NATURAL GAS FLARE CARLSBAD/CAVERN CITY, NEW MEXICO

A natural gas flare is located at approximately N32-27-50.5/W104-34-24.2 (CNM 300/021), SFC to 4200 feet MSL. Pilots should use caution when operating in this area. For further information, contact Albuquerque AFSS on 1-505-243-7831.

SAN DIEGO INTERNATIONAL AIRPORT (SAN) AIRCRAFT NOISE PROHIBITIONS/RESTRICTIONS

No departures or engine run-ups above idle power 0730-1430Z. FAR Part 36 Stage 2 departures prohibited 0600-1500Z. Per current FAA standards all helicopters are Stage 2. Valid emergency operations or mercy flights exempt from noise abatement restrictions. Operator must provide written report to SAN noise abatement office. Noise monitoring in effect continuously. All operations of aircraft which exceed 104 Effective Perceived Noise Decibels at the takeoff reference point per FAA AC 36 Series documentation are prohibited. Noise sensitive areas all quadrants; recommend pilots use best noise abatement procedures. Pilots are requested to minimize use of reverse thrust consistent with safe operations of aircraft to minimize noise impact on surrounding community. For additional noise level restrictions and information call 619-400-2781.

SPECIAL PROCEDURES SAN FRANCISCO INTERNATIONAL AIRPORT NOISE ABATEMENT PROCEDURES

Fly Quiet Program:

The Fly Quiet Program was developed to help pilots understand the rules and regulations for noise abatement at SFO and to show the public how well airline's participate in the noise abatement programs. The purpose of the Program is to encourage individual airlines to operate as quietly as possible at SFO. The Program promotes a participatory approach in complying with noise abatement procedures by grading airlines' performance and presenting these scores to the public via a published report. The Program consists of five grading elements:

- 1) The overall noise quality of each airline's fleet operating at SFO.
- 2) A measure of how well each airline complies with the nighttime Preferential Runway Use Program.
- 3) Assessment of how well each airline adheres to the Gap departure profile.
- 4) Assessment of how well each airline adheres to the Shoreline departure profile.
- 5) Evaluation of single overflight noise level exceedances.


Flight Crews: By operating your aircraft as quietly as possible, you can directly influence your airline's Fly Quiet Program score. Here are some guidelines for maintaining a high score in the Fly Quiet Program:

(a) **Preferential Runway Use Program**—Between 0100 and 0600 (LT) the preferred departure runways for noise abatement are Runways 10 L/R. Pilots of heavy aircraft can significantly improve their airline's Fly Quiet Program scores by departing on Runways 10 L/R (weather permitting).

(b) **Shoreline Departure Turn Quality**—The radius of the initial turn after departure off Runways 28 L/R is a grading element of the Fly Quiet Program. Runway 28 L/R departures making excessively wide right turns overfly residential neighborhoods. By completing the initial right turn prior to crossing Highway 101, aircraft remain over industrial and commercial areas. **This applies to all Instrument Departure Procedures (IDPs) requiring right turns after departing Runways 28 L/R.**

(c) **Gap Departure Climb Quality**—Aircraft making straight out departures off Runways 28 L/R overfly heavily populated areas immediately west of the airport. Since "higher is quieter," the Airport monitors aircraft altitudes along the departure route. Scores are assigned at specific points, or gates, set approximately one mile apart, with higher scores given to those aircraft that reach higher altitudes at the gates. **It is preferred that aircraft making straight-out departures from Runways 28 L/R climb as rapidly as possible.**

(d) **Noise Exceedance Rating**—Maximum noise level limits are established for selected noise monitor stations surrounding SFO. Pilots can improve their airline's exceedance rating by utilizing the Preferential Runway Use Program and complying precisely with the Gap and Shoreline Departure Procedures.

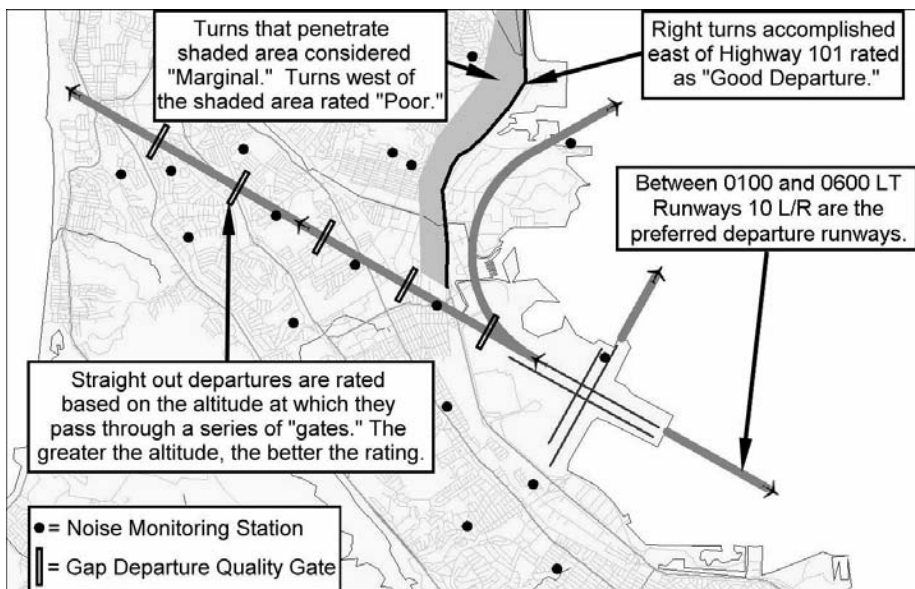

**SPECIAL PROCEDURES
SAN FRANCISCO INTERNATIONAL AIRPORT
NOISE ABATEMENT PROCEDURES
PREFERENTIAL RUNWAYS**

The SFO Nighttime Preferential Runway Use Program is a voluntary Program that was developed in 1988. SFO operates on two sets of parallel runways for both arrivals and departures, based on this runway configuration, there are three preferred nighttime preferential runway procedures:

- 1) The primary goal of the Program is to use Runways 10 L/R for take-off because they offer departure routing over the bay which will reduce the noise impacts over the communities surrounding SFO.
- 2) When departures from Runways 10 L/R are not possible, the second preference would be to depart Runways 28 L/R on the Shoreline or Quiet Departure Procedures. Both of these Procedures incorporate an immediate right turn after departure to avoid residential communities northwest of SFO.
- 3) The third preference is to depart on Runways 01 L/R. While this procedure directs aircraft over the bay, jet blast from these departures affects communities south of SFO.

The least desirable departure procedure at SFO is a straight-out departure on Runways 28 L/R these departures overfly densely populated communities immediately west of SFO and are discouraged at all hours.

The Airport Director has established a Nighttime Noise Clearance Center operated during 2200–0700 by a duty officer whose responsibilities include monitoring compliance with SFO's Preferential Runway Use Program and responding to requests for exemptions to the noise regulations.

ENGINE RUN-UP RESTRICTIONS

Run-ups of mounted aircraft engines for maintenance or test purposes is prohibited between the hours of 2200–0700 daily except as provided below:

- 1) An idle check of a single engine is allowed under the following conditions:
 - (a) An idle check of a single engine not to exceed a 5-minute duration may be conducted in the lease hold area. If more than one engine is to be checked, each engine must be checked separately and the cumulative duration of the idle checks cannot exceed 5-minutes.
 - (b) An idle check of a single engine or multiple engines (checked separately) which will exceed a duration of five minutes will be accomplished in the designated run-up areas. For purposes of noise abatement monitoring, this will be considered a power run-up.

During the hours of 2200–0700, the Operations Supervisor shall be called and permission received prior to any engine idle check or engine idle run-up, including any idle run for more than a cumulative duration of 5-minutes.

During other hours, the Operations Supervisor shall be called and permission received prior to any engine run-up. Any request for an engine run-up during the hours 2200–0700, other than that described above, which is the result of unusual or emergency circumstances, may be approved by the Nighttime Noise Clearance Center.

When approved and accomplished, the Maintenance Supervisor of the airline concerned must provide to the Airport Director a monthly report detailing the following:

- (a) Date and time of the run-up
- (b) Type of aircraft
- (c) Aircraft identification number
- (d) Location of the run-up
- (e) Duration of the run-up
- (f) An explanation of the unusual or emergency circumstances making the run-up necessary

Reports will be submitted to the Airport Director, Attn: Airport Operations within three working days after the last day of each calendar month.

SPECIAL PROCEDURES SAN FRANCISCO INTERNATIONAL AIRPORT NOISE ABATEMENT PROCEDURES

APU OPERATING RESTRICTIONS

Operators are encouraged to use ground power and air sources whenever practicable. APUs may be used when aircraft are being towed.

1) Domestic terminals—Use of APUs is prohibited between the hours of 2200–0600 except 30 minutes prior to departure, when passengers are aboard, or it is needed to test other aircraft equipment.


2) International Terminal—The following procedures apply:

(a) Aircraft scheduled to be at a gate in Boarding Areas A and G for more than 45 minutes between the hours of 0700–2200, are required to use 400Hz ground power and pre-conditioned air, where available. APUs are not authorized without prior permission is received from Airport Operations, during the use of ground power and pre-conditioned air until 30 minutes prior to push-back.

(b) All aircraft scheduled to be at an International Terminal gate between 2200–0700 hours are required to use 400Hz ground power and pre-conditioned air, where available, regardless of scheduled time at the gate. APUs are not authorized, unless prior permission is received from Airport Operations, during the use of ground power and pre-conditioned air until 30 minutes prior to push-back.

NOISE MONITORING SYSTEM

As of January 2005, the Airport installed a new Aircraft Noise Management System (ANMS) utilizing Lochard's Airport Noise and Operations Monitoring System (ANOMS(tm)) 8 product suite. This system consists of 29 fixed Environmental Monitoring Units (EMU) and four portable units. The previous passive radar system was replaced with Lochard's new hybrid, SkyTrak(tm), an integration of the FAA ARTS IIIE and live Mode S with passive radar that will drive the SFO community web site and deliver flight data throughout the airport.

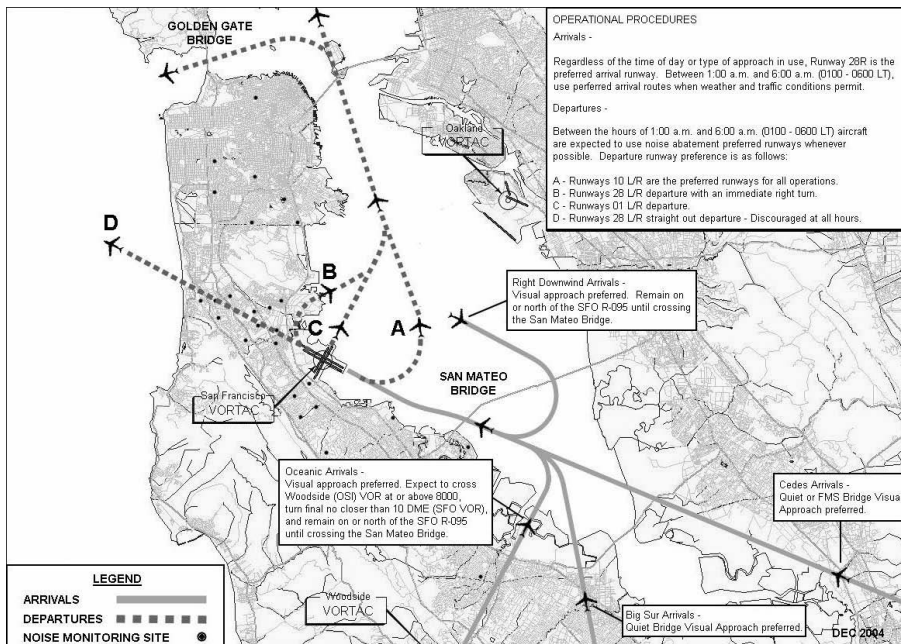

CONTACT INFORMATION

For more information about the Fly Quiet Program or noise abatement procedures contact 650-821-5100.


**AIR CARRIER OPERATIONS VICINITY OF
LONG BEACH (DAUGHERTY FIELD), CA.**


A wide mix of aircraft types including Air Carriers landing and departing Long Beach Daugherty Field, utilize the airspace south of Long Beach Airport (Daugherty Field) (LGB), Long Beach, California. The Class E airspace between Point Vicente, Catalina Island, and Huntington Beach accommodates pilot training from local flight schools, numerous IFR and VFR enroute aircraft, and helicopter and other aviation activities.

Participating flight training aircraft in Class E airspace south of Long Beach may:

- Utilize helicopter frequency 129.0 at or below 1,000 MSL.
- Utilize air-to-air frequency 121.95 above 1,000 MSL and below 4,500 MSL.
- Participants are encouraged to make position reports relative to Palos Verde Point, Point Vicente and Point Fermin, Angels Gate, Queens Gate, Emmy & Eva Oil Platforms and the Queen Mary.

VFR flight following may be available from SOCAL TRACON as indicated on the LA Terminal Area Chart.

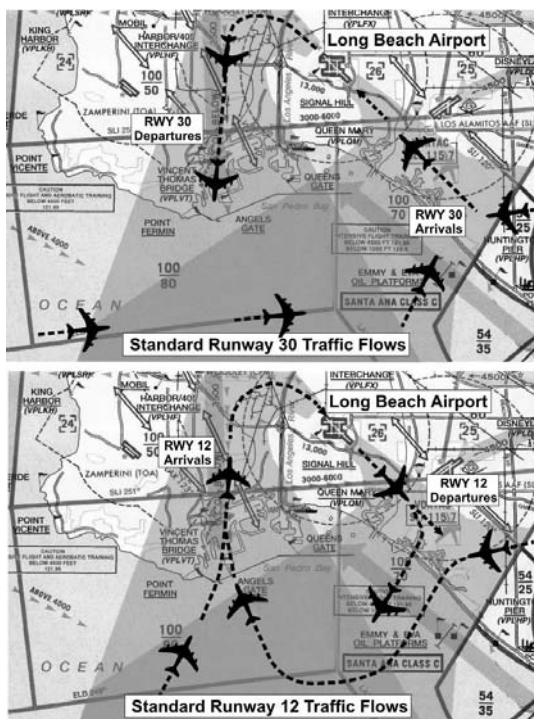


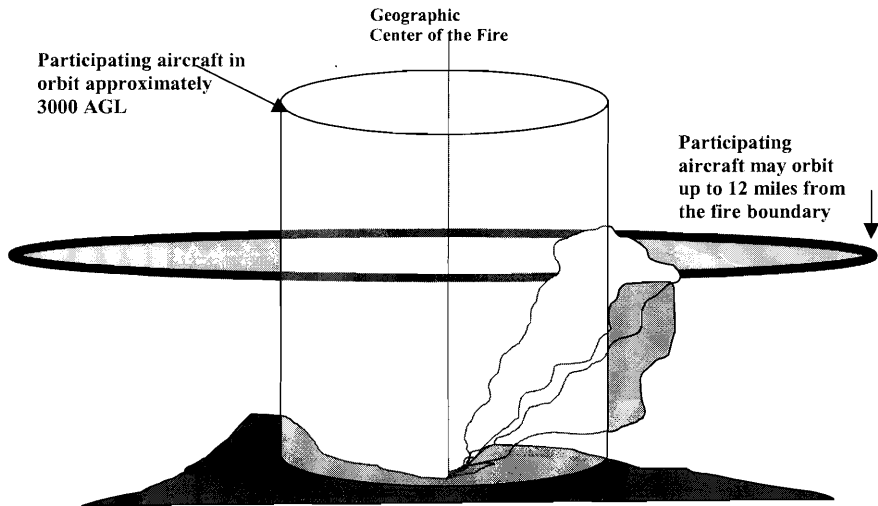FIREFIGHTING TRAFFIC AREAS

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.


The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

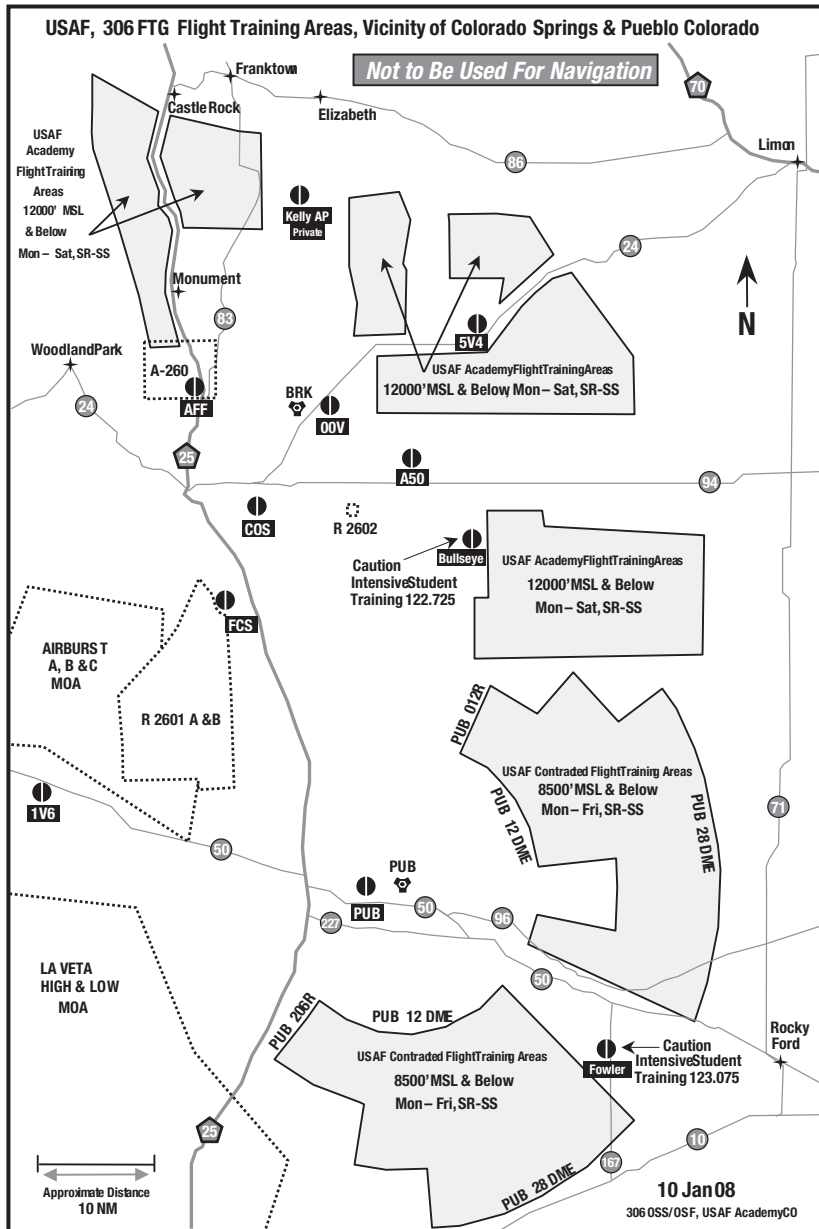

GLIDER/SOARING ACTIVITIES AROUND THE RENO-TAHOE INTERNATIONAL AIRPORT

There is intense glider activity up to FL180 near the Reno-Tahoe International Airport. Gliders conduct aerobatic maneuvers and other soaring activities in airspace on or near arrival routes, departure routes, final approach courses and holding fixes for the Reno-Tahoe International Airport. Gliders operations may originate from the Air Sailing, Minden-Tahoe and Truckee (California) Airports. The Air Sailing Airport is located near the Mustang (FMG) 337 radial at 20 nautical miles, between Anaho, Pyram and Takle intersections. The Minden-Tahoe Airport is located near the FMG 172 radial at 32 nautical miles, between J5 and J94. The Truckee California Airport is located near the FMG 225 radial at 26 nautical miles, north of the Squaw Valley VOR between J32 and V392. Federal Aviation Regulations do not require gliders operators to equip, activate or to broadcast the location of their aircraft via transponder or radio communications while operating outside of Class A or C Airspace. Atmospheric conditions attract large quantities of gliders to the area and activity near mountain ridges or "hot spots" may be intense. Altitudes up to 17,999 have been observed and pilots should exercise due diligence when exiting Class A and C airspace. Pilots are encouraged to refer to the SFO Sectional Aeronautical Chart and to the remarks in the Airport/Facility Directory, Southwest US for the Reno-Tahoe International Airport (RNO) regarding glider activity. For further information, call Reno ATCT/TRACON at (775) 784-5582.

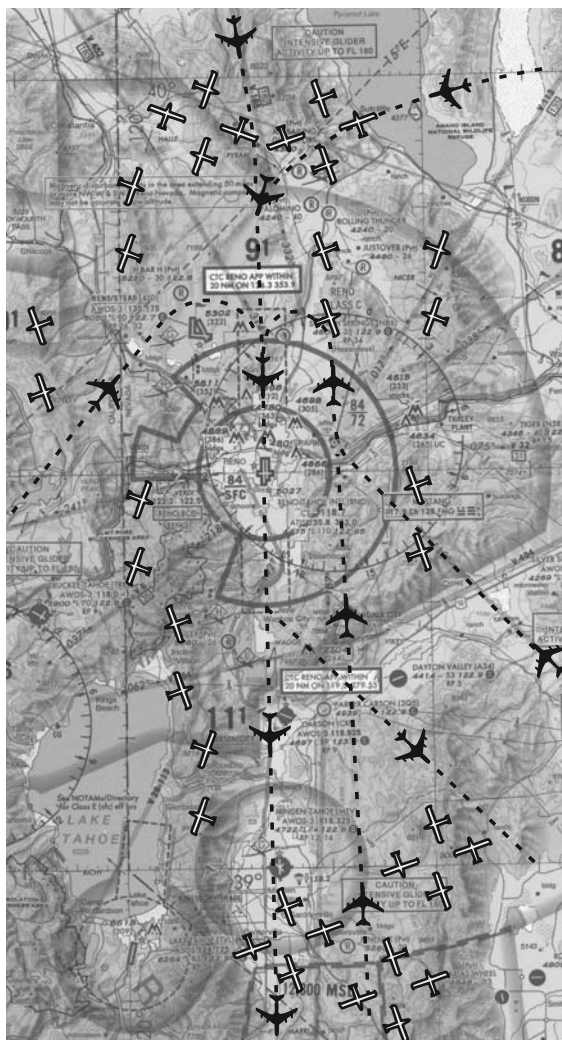

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93-1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at <http://www.faa.gov>. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e-CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll-free telephone number for accessing e-CVRS is 1-800-875-9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll-free areas may access e-CVRS by calling the toll number of 703-707-0568. The Internet web address for accessing the e-CVRS is <http://www.fly.faa.gov/ecvrs>. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904-4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high-density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904-4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e-CVRS.

FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the contiguous United States, Hawaii and Puerto Rico, are provided by a network of large hub facilities and smaller remote facilities which are interconnected with the hubs.

Selected remote FSS facilities across the contiguous United States have variable part-time operating hours. Because of the interconnectivity between remote and hub facilities, all FSS services are available continuously using published telephone numbers and radio frequencies.

Telephone Information Briefing Service (TIBS) is the FSS service that provides continuous recordings of meteorological and/or aeronautical information including area and/or route briefings, airspace procedures and special announcements. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings 1-800-WX-BRIEF (1-800-992-7433)

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

TIBS (see description above) 1-800-4TIBS-WX (1-877-484-2799)
 Clearance Delivery Only 1-888-766-8267
 Lifeguard Flights Only 1-877-LIF-GRD3 (1-877-543-4733)
 Flights within DC SFRA & FRZ * 1-866-225-7410

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: <u>TAF</u> -routine or <u>TAF AMD</u> -amended forecast, <u>METAR</u> -hourly, <u>SPECI</u> -special or <u>TESTM</u> -non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC " <u>Z</u> ", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times	
	In U.S. METAR : <u>COR</u> rected ob; or <u>AUTO</u> mated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>Var</u> ia <u>ble</u>); next 2-3 digits for speed and unit, <u>KT</u> (KMH or MPS); as needed, <u>Gust</u> and maximum speed; 00000KT for calm; for METAR , if direction varies 60 degrees or more, <u>Variability</u> appended, e.g. 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles</u> & fractions; above 6 miles in TAF <u>Plus</u> 6SM. (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>Left</u> , <u>Center</u> , or <u>Right</u> as needed; <u>'/'</u> ; <u>Minus</u> or <u>Plus</u> in U.S., 4-digit value, <u>FeeT</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability</u> 4-digit value (and tendency <u>Down</u> , <u>Up</u> or <u>No</u> change)	R28L/2600FT
HZ	Significant present, forecast and recent weather: see table (on back)	TSRA
FEW020	Cloud amount, height and type: <u>SKY</u> Clear 0/8, <u>FEW</u> >0/8-2/8, <u>SCaT</u> tered 3/8-4/8, <u>BroKeN</u> 5/8-7/8, <u>OVerCast</u> 8/8; 3-digit height in hundreds of ft; <u>Towering CU</u> mulus or <u>CumulonimBus</u> in METAR ; in TAF , only <u>CB</u> . <u>Vertical</u> Visibility for obscured sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, <u>CleaR</u> for "clear below 12,000 feet"	OVC010CB
	Temperature: degrees Celsius; first 2 digits, temperature <u>'/'</u> last 2 digits, dew-point temperature; <u>Minus</u> for below zero, e.g., M06	18/16
	Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	A2992

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

Forecast	Explanation	Report
WS010/31022KT	In U.S. TAF , non-convective low-level ($\leq 2,000$ ft) <u>Wind Shear</u> ; 3-digit height (hundreds of ft); <u>"Z"</u> ; 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>KT</u>	RMK SLP045 T01820159
FM1930	In METAR , <u>ReMark</u> indicator & remarks. For example: <u>Sea-Level Pressure</u> in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/dew-point</u> in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	
TEMPO 2022	<u>From</u> and 2-digit hour and 2-digit minute beginning time: indicates significant change. Each FM starts on new line, indented 5 spaces.	
PROB40 0407	TEMPO rary: changes expected for < 1 hour and in total, < half of 2-digit hour beginning and 2-digit hour ending time period	
BECMG 1315	PROB ability and 2-digit percent (30 or 40): probable condition during 2-digit hour beginning and 2-digit hour ending time period	
	BECOM ing: change expected during 2-digit hour beginning and 2-digit hour ending time period	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

QUALIFIER

Intensity or Proximity

- Light "no sign" Moderate + Heavy

VC Vicinity: but not at aerodrome; in U.S. **METAR**, between 5 and 10SM of the point(s) of observation; in U.S. **TAF**, 5 to 10SM from center of runway complex (elsewhere within 8000m)

Descriptor

MI Shallow	BC Patches	PR Partial	TS Thunderstorm
BL Blowing	SH Showers	DR Drifting	FZ Freezing

WEATHER PHENOMENA

Precipitation

DZ Drizzle	RA Rain	SN Snow	SG Snow grains
IC Ice crystals	PL Ice pellets	GR Hail	GS Small hail/snow pellets
UP Unknown precipitation in automated observations			

Obscuration

BR Mist ($\geq 5/8$ SM)	FG Fog ($< 5/8$ SM)	FU Smoke	VA Volcanic ash
SA Sand	HZ Haze	PY Spray	DU Widespread dust

Other

SQ Squall	SS Sandstorm	DS Duststorm	PO Well developed dust/sand whirles
FC Funnel cloud	+FC tornado/waterspout		

- Explanations in parentheses "()" indicate different worldwide practices.
- Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
- NWS **TAFs** exclude turbulence, icing & temperature forecasts; NWS **METARs** exclude trend fcsts
- Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥ 10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, whichever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.

UNITED STATES DEPARTMENT OF COMMERCE

NOAA/PA 96052

National Oceanic and Atmospheric Administration—National Weather Service

KEY AIR TRAFFIC FACILITIES

Air Traffic Control System Command Center

Main Number.....703-904-4400

RGNL AIR TRAFFIC DIVISIONS

REGION	TELEPHONE
Alaskan	907-271-5464
Central	816-329-2500
Eastern	718-553-4502
Great Lakes	847-294-7202
New England	781-238-7500
Northwest Mountain	425-227-2500
Southern	404-305-5500
Southwest	817-222-5500
Western Pacific	310-725-6500

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m.-4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m.-4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m.-5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m.-4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m.-4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m.-4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m.-4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m.-4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m.-4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m.-4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m.-3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m.-4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m.-4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m.-3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m.-4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m.-4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m.-4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONs)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m.-4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m.-3:30 p.m.	916-366-4001
Southern CA	310-725-3300	7:30 a.m.-4:00 p.m.	858-537-5800

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

FAA AND NWS

KEY AIR TRAFFIC FACILITIES

DAILY NAS REPORTABLE AIRPORTS

AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m.-5:00 p.m.	505-842-4366
Andrews AFB, MD	718-995-5426	8:00 a.m.-4:30 p.m.	301-735-2380
Baltimore/Washington Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m.-4:30 p.m.	410-962-3555
Boston Logan Intl, MA	781-238-7001	7:30 a.m.-4:00 p.m.	617-455-3100
Bradley Intl, CT	617-238-7001	7:30 a.m.-4:00 p.m.	203-627-3428
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m.-5:30 p.m.	818-567-4806
Charlotte Douglas Intl, NC	404-305-5180	8:00 a.m.-4:30 p.m.	704-344-6487
Chicago Midway, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-884-3670
Chicago O'Hare Intl, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-601-7600
Cleveland Hopkins Intl, OH	847-294-8400	8:00 a.m.-4:00 p.m.	216-898-2020
Covington/Cincinnati, OH	708-294-7401	8:00 a.m.-4:30 p.m.	606-767-1006
Dallas/Ft. Worth Intl, TX	817-222-5006	8:30 a.m.-5:00 p.m.	972-615-2531
Dayton Cox Intl, OH	847-294-8400	7:30 a.m.-4:00 p.m.	937-454-7300
Denver Intl, CO	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1600
Detroit Metro, MI	847-294-8400	8:00 a.m.-4:00 p.m.	734-955-5000
Fairbanks Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-474-0050
Fort Lauderdale Intl, FL	404-305-5180	7:00 a.m.-3:30 p.m.	305-356-7932
George Bush Intercontinental/Houston, TX	817-222-5006	7:30 a.m.-4:00 p.m.	713-230-8400
Hartsfield-Jackson Atlanta Intl, GA	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Honolulu Intl, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-840-6100
Houston Hobby, TX	817-222-5006	8:00 a.m.-5:00 p.m.	713-847-1400
Indianapolis Intl, IN	847-294-8400	8:00 a.m.-4:00 p.m.	317-484-6600
Kahului/Maui, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-877-0725
Kansas City Intl, MO	816-329-3000	7:30 a.m.-4:00 p.m.	816-329-2700
Las Vegas McCarran, NV	310-725-3300	7:30 a.m.-4:00 p.m.	702-262-5978
Los Angeles Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	310-342-4900
Louis Armstrong New Orleans Intl, LA	817-222-5006	7:00 a.m.-4:30 p.m.	504-471-4300
Memphis Intl, TN	404-305-5180	7:30 a.m.-4:00 p.m.	901-322-3350
Miami Intl, FL	404-305-5180	7:00 a.m.-4:00 p.m.	305-869-5400
Minneapolis/St. Paul, MN	847-294-8400	8:00 a.m.-4:00 p.m.	612-713-4000
Nashville Intl, TN	404-305-5180	7:00 a.m.-3:30 p.m.	615-781-5460
New York Kennedy Intl, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-656-0335
New York La Guardia, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-335-5461
Newark Liberty Intl, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	973-645-3103
Norman Y. Mineta San Jose Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	408-982-0750
Ontario Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	909-983-7518
Orlando Intl, FL	404-305-5180	7:30 a.m.-5:00 p.m.	407-850-7000
Philadelphia Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	215-492-4100
Phoenix Sky Harbor Intl, AZ	310-643-3200	7:30 a.m.-4:00 p.m.	602-379-4226
Pittsburgh Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	412-269-9237
Portland Intl, OR	425-227-1389	7:30 a.m.-4:00 p.m.	503-493-7500
Raleigh-Durham, NC	404-305-5180	8:00 a.m.-4:30 p.m.	919-840-5544
Ronald Reagan Washington National, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-413-1535
Salt Lake City, UT	425-227-1389	7:30 a.m.-4:00 p.m.	801-325-9600
San Antonio Intl, TX	817-222-5006	8:00 a.m.-4:30 p.m.	210-805-5507
San Diego Lindbergh Intl, CA	310-725-3300	8:00 a.m.-4:30 p.m.	619-299-0677
San Francisco Intl, CA	310-643-3200	7:00 a.m.-3:30 p.m.	650-876-2883
San Juan Intl, PR	404-305-5180	7:30 a.m.-5:00 p.m.	809-253-8663
Seattle-Tacoma Intl, WA	425-227-1389	7:30 a.m.-4:00 p.m.	206-768-2900
St. Louis Lambert, MO	816-329-3000	7:30 a.m.-4:00 p.m.	314-890-1000
Tampa Intl, FL	404-305-5180	7:30 a.m.-4:00 p.m.	813-371-7700
Ted Stevens Anchorage Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-271-2700
Teterboro, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	201-288-1889
Washington Dulles Intl, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-661-6031
West Palm Beach, FL	404-305-5180	8:00 a.m.-4:30 p.m.	407-683-1867
Westchester Co, NY	718-995-5426	8:00 a.m.-4:30 p.m.	914-948-6520

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

® ALBUQUERQUE CENTER – 134.6 132.8	H-4-5-6-7, L-5-6-7-8-10-15-17-19
Alamogordo – 132.65 132.65	
Animas – 134.45 133.0	(KZAB)
Carlsbad – 135.875	
Childs Peak – 135.15 132.45 126.45 125.25	
Clines Corner – 133.65 133.65 132.8 125.075	
El Paso B – 128.2 125.525	
Globe Nr 1 – 135.725 132.9 132.9	
Globe Nr 2 – 135.15 133.85 132.35 132.35 125.4	
Mesa Rica – 125.075 119.45	
Mount Dora – 133.05 127.85	
Prescott – 135.325 134.325 128.45	
Raton – 132.8	
Roswell – 132.65 132.65	
Sandia Mountain – 132.8	
Silver City – 134.45	
Tesuque Peak – 132.8	
Truth or Consequences – 128.2	
Tucson – 134.45 133.0	
Tucumcari – 132.32 126.92 126.85 119.45	
West Mesa – 134.6 133.65 133.65 124.325 119.45	
Winslow – 128.125 124.5	
Zuni – 134.6 132.9 132.9 124.325 120.55	

® DENVER CENTER – 125.9	H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15
Alamosa – 128.375	(KZDV)
Aspen – 134.5 132.85 125.35 119.85	
Brush A – 133.95	
Brush B – 118.475	
Cortez – 134.7 118.575	
Denver – 133.4 132.85 128.65 126.875 125.95	
Denver A – 126.5	
Denver B – 119.85	
Durango – 118.575	
Eastonville – 134.975	
Farmington – 128.125 125.675 118.575	
Goodland – 132.5	
Grand Mesa – 135.125 134.275 126.725 125.675	
Grand Mesa A – 125.35	
Grand Mesa B – 134.5	
Gunnison – 133.525 125.35	
Hanksville – 127.55	
Hayden – 128.325 120.475	
Kremmling – 132.85 128.65	
La Junta – 134.125 133.4 132.225 128.37	
Montrose – 125.35	
Ogallala – 126.325 132.7	
Pueblo – 135.4 132.225 128.375	
Tuba City – 132.875 127.55 118.225	
Walton Peak – 126.5	

® L. A. CENTER	H-3-4, L-3-4-5-7-8-9, A-2
Arr—Dep U.S. – 135.45 134.55 134.4 133.4 132.15 128.05 127.4 126.4 126.0 119.0	(KZLA)
Bakersfield – 127.1	
Baldwin Hills – 132.85	
Barstow – 134.65 133.55 132.5 132.3 126.35 125.725	
Blythe – 134.475 127.525	
Cedar City – 135.55 135.25 127.35 124.2	
Edom Hill – 133.75 126.7	
Julian – 127.525 126.775	
Keeler – 124.625 124.625	
Laguna – 128.6 128.15 125.65 125.65 119.95	
Lebec – 135.3 128.375	

Mount Potosi – 132.625 124.625 124.625
 Nelson – 134.65 127.35 124.85 124.2 118.025
 Ontario – 125.65
 Palmdale – 132.5 125.275
 Peach Springs – 128.075
 Pleasants Peak – 132.85 125.275 119.95
 Riverside – 126.35
 Saddle Peak – 132.6 125.8
 San Luis Obispo – 119.05
 Santa Barbara – 135.5 132.15 126.525 119.05
 Santa Catalina – 134.575
 Seligman – 133.2 124.85
 Tonopah – 124.625
 Twentynine Palms – 133.2 128.15 126.35
 Whittier – 125.275
 Yuma – 126.775

® OAKLAND CENTER

H-3-4, L-2-3-7-5-9-11, A-2
(KZOA)

Angels Camp – 134.375 132.95 127.95 126.85 121.25 119.75
 Bishop – 125.75
 Fallon – 134.45 128.8
 Ferndale – 134.15 134.15
 Fresno – 134.375 133.7 132.8 126.9 123.8
 Half Moon Bay – 134.15 134.15 127.45 125.45 119.475
 Hollister – 127.45
 Mina – 132.05 127.175 125.75
 Mount Tamalpais – 127.8
 Priest – 134.55 133.7 132.8 128.7 126.9
 Red Bluff – 134.975 132.2 119.975
 Reno – 134.45 128.8
 Sacramento – 132.95
 San Luis Obispo – 128.7
 South Lake Tahoe – 134.3
 Squaw Valley – 127.95
 Tonopah – 132.05 125.75
 Ukiah – 134.975 132.2 127.8 119.975

® SALT LAKE CITY CENTER

H-1-2-3, L-9-11-12-13-14
(KZLC)

Battle Mountain – 132.25 128.725
 Bryce Canyon – 133.6
 Cedar City – 125.575 125.575
 Delle – 132.025 128.55 128.55
 Delta – 127.825 125.575
 Elko – 132.25 128.725
 Ely – 133.45
 Fairfield – 133.9
 Francis Peak – 135.775 127.7 119.95
 Hanksville – 133.6 133.6
 Myton – 135.775 119.95
 Sunnyside – 133.9 127.925 127.925 125.575
 Tonopah – 133.45 133.45
 Wilson Creek – 134.525 133.45 133.45 127.925 127.925
 Winnemucca – 132.25

® SEATTLE CENTER

H-1-3, L-1-2-11-13

Antelope Mountain – 124.85
 Arcata – 124.85
 Ferndale – 135.15 124.85
 Klamath Falls – 134.9 127.6

(KZSE)

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID name. RCO's not at NAVAID's are listed by name.

ALBUQUERQUE AFSS

ALBUQUERQUE RCO 122.0 **122.55**
 ALAMOGORDO RCO 122.15
 ANTON CHICO VORTAC 117.8T 122.1R
 CARLSBAD RCO **122.65**
 CIMARRON VORTAC 116.4T 122.1R
 CLINES CORNERS RCO 122.3
 CLOVIS RCO 122.5
 CORONA VORTAC 115.5T 122.1R
 DEMING RCO 122.2
 FARMINGTON RCO **122.4**
 GALLUP VORTAC 115.1T 122.1R **122.6**
 HOBBS RCO 122.2
 LAS VEGAS RCO 122.6
 ROSWELL RCO **122.45**
 RUIDOSO RCO 122.25
 SANTA FE RCO 122.2
 SILVER CITY VORTAC 110.8T 122.1R
 SOCORRO VORTAC 116.8T 122.1Re
 TAOS VORTAC 117.6T 122.1R 122.25
 TRUTH OR CONSEQUENCES RCO 122.2
 TUCUMCARI RCO **122.35**
 ZUNI RCO 122.05

CEDAR CITY AFSS

ABAJO PEAK RCO 122.55
 BONNEVILLE VORTAC 112.3T 122.1R
 BRYCE CANYON RCO 122.2
 BULLFROG BASIN RCO **122.4**
 CARBON RCO 122.2
 CEDAR CITY RCO 122.0 122.2 122.6
 DELLE RCO **122.5**
 DELTA RCO 122.55
 FAIRFIELD RCO 122.25
 FRANCIS PEAK RCO 122.2
 HALLS CROSSING RCO 122.4
 HANKSVILLE RCO 122.65
 LUCIN VORTAC 113.6T 122.1R
 MILFORD VORTAC 112.1T 122.1R
 MOAB RCO 122.3
 MYTON VORTAC 112.7T 122.1R
 OGDEN RCO 122.45
 RICHFIELD RCO **122.5**
 ST GEORGE RCO 122.5
 SALT LAKE CITY RCO 122.4
 VERNAL RCO 122.35

DENVER AFSS

AKRON RCO 120.675
 ALAMOSA RCO 122.15
 BADGER MOUNTAIN RCO 122.2
 BLACK FOREST RCO 122.25
 BLUE MESA RCO 122.55
 CORTEZ RCO 122.3
 DENVER RCO 122.0 122.2 122.35 123.65
 DOVE CREEK RCO 122.5
 DURANGO RCO **122.35**
 EAGLE RCO 122.2
 FORT COLLINS-LOVELAND RCO 122.4
 GILL RCO 122.65
 GLENWOOD SPRINGS RCO 122.2
 GRAND JUNCTION RCO 122.6
 GRAND MESA RCO 122.2
 HAYDEN RCO 122.25
 KREMMLING RCO 122.3
 LA JUNTA RCO **122.6**

LAMAR VORTAC 116.9T 122.1R
 LIMON RCO 122.475
 MEEKER RCO 122.15
 MONTROSE RCO 122.65
 PUEBLO RCO 122.2
 RANGELY RCO 122.65
 RED TABLE MOUNTAIN RCO 122.4
 RIFLE RCO 122.5
 STEAMBOAT SPRINGS RCO 122.2
 TELLURIDE RCO 122.15
 TRINIDAD RCO 122.2

HAWTHORNE AFSS

BURBANK RCO 122.35
 FILLMORE VORTAC 112.5T 122.1R
 GUADALUPE VOR 111.0T 122.1R
 HAWTHORNE RCO 122.0 122.2 122.5
 PASO ROBLES RCO 122.4
 SAN MARCUS VORTAC 114.9T 122.1R 122.3

OAKLAND AFSS

ARCATA RCO 122.6
 CRESCENT CITY RCO 122.3
 EUREKA RCO 122.35
 GARBERVILLE RCO 122.3
 MOUNTAIN VIEW RCO **122.5**
 MOUNT TAMALPAIS RCO **122.35**
 OAKLAND RCO 122.0 122.2 **122.5** 129.4 131.95
 POINT ARENA RCO 122.6
 SALINAS RCO **122.6**
 UKIAH RCO **122.35**

PRESCOTT AFSS

AJO RCO 122.65
 BAGDAD RCO 122.5
 BISBEE RCO 122.4
 BLACK METAL PEAK RCO 122.55
 BUCKEYE VORTAC 110.6T 122.1R
 COCHISE VORTAC 115.8T 122.1R
 DOUGLAS RCO 122.6
 FLAGSTAFF VOR/DME 113.85T 123.65R
 GILA BEND VORTAC 116.6T 122.1R
 GLOBE RCO 122.3
 GRAND CANYON RCO 123.65
 KAYENTA RCO 122.45
 KINGMAN VOR/DME 108.8T 122.1R
 MINGUS MOUNTAIN RCO **122.3**
 MOUNT LEMMON RCO 122.4
 NEEDLES VORTAC 115.2T 122.1R
 NOGALES RCO 122.4
 PAGE RCO 122.6
 PEACH SPRINGS RCO 122.25
 PHOENIX RCO 122.2 122.6
 PRESCOTT RCO 122.2 122.4
 SAFFORD RCO 122.3
 ST JOHNS VORTAC 112.3T 122.1R
 STANFIELD VORTAC 114.8T 122.1R
 TUBA CITY VORTAC 113.5T 122.05R
 TUCSON RCO 122.2
 WINSLOW RCO 122.6
 YUMA RCO 122.2

RANCHO MURIETA AFSS

ANGELS CAMP RCO **122.3**
 ANTELOPE MOUNTAIN RCO 122.4
 BAKERSFIELD RCO **122.45**
 CHICO VOR/DME 109.8T 122.1R
 EL NIDO VOR/DME 114.2T 122.1R
 FALL RIVER MILLS RCO 122.4
 FELLOWS VORTAC 117.5T 122.1R
 FORT JONES VOR/DME 109.6T 122.1R

FRESNO RCO 122.2 **122.55**
GORMAN VORTAC 116.1T 122.1R
HANGTOWN VOR/DME 115.5T 122.1R
MARYSVILLE VOR/DME 110.8T 122.1R 122.6
MAXWELL VORTAC 110.0T 122.1R
MODESTO VOR/DME 114.6T 122.1R
PANOCHE VORTAC 112.6T 122.1R
QUINCY RCO 122.4
RANCHO MURIETA RCO 122.2
RED BLUFF RCO **122.4**
REDDING VOR/DME 108.4T 122.1R
SACRAMENTO RCO **122.05**
STOCKTON RCO 122.65
TULE PORTERVILLE VOR/DME 109.2T 122.1R
VISALIA VOR/DME 109.4T 122.1R
WEAVERVILLE RCO 122.4

RENO AFSS

BEATTY VORTAC 114.7T 122.1R
COALDALE VORTAC 117.7T 122.1R
CURRANT RCO 122.3
ELKO RCO 122.6
ELY RCO 122.2
EUREKA RCO 122.3
HAZEN VORTAC 114.1T 122.1R
JACKPOT RCO 122.5
LAS VEGAS RCO 122.4
LOVELOCK RCO 122.4
MINA VORTAC 115.1T 122.1R
MORMON MESA VORTAC 114.3T 122.1R
MOUNT LEWIS RCO **122.65**
MOUNT POTOSI RCO 122.35
RENO RCO 122.2 122.5
SOD HOUSE RCO 122.6
SQUAW VALLEY RCO 122.25
TONOPAH RCO 122.6
WELLS VOR 114.2T 122.1R
WILSON CREEK VORTAC 116.3T 122.1R
WINNEMUCCA RCO 122.3

RIVERSIDE AFSS

BARSTOW RCO 122.3
BISHOP RCO 122.6
BLYTHE RCO 122.4
DAGGETT RCO 122.2
GOFFS VORTAC 114.4T 122.05R
FURNACE CREEK RCO 122.2
HECTOR VORTAC 112.7T 122.1R
HOMELAND VOR 113.4T 122.1R
LANCASTER RCO 122.2
MAMMOTH RCO 122.15
NEEDLES RCO 122.2
PALM SPRINGS VORTAC 115.5T 122.1R
PARKER VORTAC 117.9T 122.1R
POMONA RCO 123.65
RAND MOUNTAIN RCO 122.4
RIVERSIDE RCO 122.05 122.2
SANTA ANA RCO 122.45
THERMAL RCO **122.3**
TWENTYNINE PALMS VORTAC 114.2T 122.1R

SAN DIEGO AFSS

BARD VORTAC 116.8T 122.1R
IMPERIAL VORTAC 115.9T 122.1R 122.5
JULIAN RCO 123.65
OCEANSIDE VORTAC 115.3T 122.1R
SAN DIEGO RCO 122.2 122.4
YUMA RCO 122.6

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and the general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manager, Flight Standards District Office—Federal Aviation Administration.

ARIZONA

17777 N. Perimeter Drive, Suite 101
Scottsdale, AZ 85255
Telephone: 480-419-0111

CALIFORNIA

Fresno Air Terminal
4955 E. Anderson, Suite #110
Fresno, CA 93727-1573
Telephone: 559-487-5306

5001 Airport Plaza Drive, Suite #100
Long Beach, CA 90815
Telephone: 562-420-1755

2250 E. Imperial Highway, Suite #140
El Segundo, CA 90245
Telephone: 310-215-2150

1420 Harbor Bay Parkway, Suite 280
Alameda, CA 94502-7083
Telephone: 510-748-0122
Fax: 510-748-9559

6961 Flight Rd.
Riverside, CA 92504
Telephone: 951-276-6701

6650 Belleau Wood Lane
Sacramento, CA 95822
Telephone: 916-422-0272

8525 Gibbs Drive, Suite 120
San Diego, CA 92123
Telephone: 619-557-5281

San Francisco IFO
831 Mitten Road, Room 105
Burlingame, CA 94010-1303
Telephone: 650-876-2771

San Francisco CMO
863 Mitten Road, Building B
Burlingame, CA 94010-1303
Telephone: 650-876-9013

1250 Aviation Ave., Suite 295
San Jose, CA 95110-1130
Telephone: 408-291-7681

16501 Sherman Way, Suite 330
Van Nuys, CA 91406
Telephone: 818-904-6291

COLORADO

26805 E. 68th Avenue, Suite 200
Denver, CO 80249-6361
Telephone: 303-342-1100

NEVADA

7181 Amigo Street, Suite 180
Las Vegas, NV 89119
Telephone: 702-269-1445
Fax: 702-269-8013

4900 Energy Way
Reno, NV 89502
Telephone: 775-858-7700

NEW MEXICO

1601 Randolph Road SE, Suite 200N
Albuquerque, NM 87106
Telephone: 505-764-1200
1-800-531-8999 (NM only)
1-800-531-1124

UTAH

1020 North Flyer Way
Salt Lake City, UT 84116
Telephone: 801-257-5020

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service.

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes.

The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and flight are normally cleared directly on the airway.

2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).

3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.

4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.

5. Where more than one route is listed the routes have equal priority for use.

6. Official location identifiers are used in the route description for VOR/VORTAC nav aids.

7. Intersection names are spelled out.

8. Navaid and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and intersection names will be assigned as soon as routine processing can be accomplished. Navaid radial (no distance stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another navaid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH).

9. Where two nav aids, an intersection and a navaid, a navaid and a navaid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.

10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.

11. (90–170 incl) altitude flight level assignment in hundred of feet.

12. The notations "pressurized" and "unpressurized" for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.

13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.

Sun..... 1300–2259 local time.

Mon thru Fri 0701–2259 local time.

Sat 0701–1459 local time.

14. Use current SIDs and STARs for flight planning.

15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of the route outside the brackets will likely be required by the facilities involved.

LOW ALTITUDE

Terminals	Route	Effective Times (UTC)
SAN FRANCISCO/OAKLAND METRO AREA		
From SAN FRANCISCO Area: West Bay Airports		
Los Angeles Area	(70–90–110–130–150–170) V27 VTU V299	
	SADDE V107 LAX	1400–0800
From OAKLAND Area: East Bay Airports		
Los Angeles Area	(70–90–110–130–150–170) V109 PXN V113	1400–0800
	V485 V299 SADDE V107 LAX	

HIGH ALTITUDE

Terminals	Route	Effective Times (UTC)
ALBUQUERQUE (ABQ)		
Chicago O'Hare (ORD).....	J18 GCK J96 IRK BDF-STAR	1100-0400
Houston (HOU).....	(Turbojets) LLO TEXNN-STAR	
Houston (IAH)	LLO RIICE-STAR.....	
ASPEN (ASE)		
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR.....	
BURBANK (BUR)		
Chicago O'Hare (ORD).....	(all B747, B767, B727, DC10, DC87, L1011) DAG LAS BCE MTU OCS J94 ONL J148 MCW JVL-STAR.....	0000-2359
	or	
	(all other jets) DAG EED DRK J96 IRK BDF-STAR ..	0000-2359
Detroit Metro-Wayne Co (DTW)	[BUR OBH] OBH J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	[BUR OBH] OBH J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
DENVER (DEN)		
Boca Raton (BCT).....	[DEN ONL] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW PRRIE (RNAV)-STAR.....	
Boston (BOS).....	[DEN ONL] J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD).....	[DEN ONL] MCW JVL-STAR	
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR.....	
Dallas/Fort Worth (DFW)	J17 AMA J58 SPS UKW	
Detroit Metro-Wayne Co (DTW)	[DEN OBH] J100 DBQ BAE MKG POLAR-STAR	
Fort Lauderdale (FLL)	(all others) [DEN ICT] RZC VUZ MGM SZW J41 PIE FORTL-STAR.....	
	or	
	(GPS or DME/DME-IRU equipped) [DEN ICT] RCZ VUZ MGM SZW JINGL (RNAV)-STAR	
Ft Myers (RSW)	TTT J58 HRV Q105 BLVNS Q102 BAGGS TYNEE (RNAV)-STAR	
Houston (HOU).....	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR.....	
Kennedy (JFK)	[DEN ONL] J94 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
Miami (MIA)	(all others) [DEN ICT] RZC VUZ MGM SZW J41 PIE CYY-STAR	
	or	
	(Turbojets-GPS or DME/DME-IRU equipped) [DEN ICT] ICT RZC VUZ MGM SZW SSCOT (RNAV)-STAR	
Newark (EWR)	IOW GIJ J554 CRL J584 SLT FQM-STAR	1100-0400
Orlando Intl (MCO).....	[DEN ICT] RZC MEM J41 PIE LAL	
	or	
	(GPS or DME/DME-IRU equipped) ICT RZC MEM J41 PIE COSTR (RNAV)-STAR.....	1100-0400
Palm Beach (PBI)	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW WLACE (RNAV)-STAR.....	
	or	
	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW CTY WLACE (RNAV) -STAR	
Pittsburgh (PIT)	[DEN JOT] JOT J146 J34 DJB V30 ACO V337 CUTTA	1500-0100
Sarasota/Bradenton (SRQ).....	DFW J58 COVIA SRQ-STAR.....	
Tampa (TPA)	[DEN ICT] RZC VUZ MGM SZW DARBS-STAR	
	or	
	[DEN ICT optional] (GPS or DME/DME-IRU equipped) ICT RZC VUZ MGM SZW FOXX (RNAV)-STAR	

PREFERRED IFR ROUTES

345

Terminals	Route	Effective Times (UTC)
West Palm Beach (PBI)	[DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW WLACE (RNAV)-STAR..... or [DEN ICT] (Turbojets-GPS or DME/DME-IRU equipped) RZC MEM VUZ MGM SZW CTY GULLO (RNAV)-STAR.....	
FRESNO (FAT)		
Denver.....	OAL J148 DTA J84 EKR TOMSN-STAR.....	1400-0000
LAS VEGAS (LAS)		
Chicago O'Hare (ORD).....	(FL240 and above, All) BCE MTU OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Detroit/Wayne Co (DTW)	BAE MKG POLAR-STAR	
	or	
Houston (HOU).....	PXV VHP FWA MIZAR-STAR	
	(Turbojets) LLO TEXNN-STAR	
	or	
Houston (IAH)	FST SAT LISSE-STAR	
	LLO RIICE-STAR.....	
	or	
	FST SAT GLAND-STAR	
LONG BEACH (LGB)		
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Portland, OR (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500
LOS ANGELES (LAX)		
Boston (BOS).....	J9 MLF J107 OCS J94 DBQ BAE J16 ALB GDM-STAR..... or J9 MLF J107 DDY J158 ABR J70 GEP J106 GRB J38 ECK J16 ALB GDM-STAR.....	
Chicago O'Hare (ORD).....	(all B747, B767, B727, DC10, DC87, L1011) DAG LAS BCE MTU OCS J94 ONL J148 MCW JVL-STAR.....	1100-0300
	or	
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	(all other jets) TRM J78 DRK J96 IRK BDF-STAR	1100-0300
Detroit Metro-Wayne (DTW)	OBK CRL HIMEZ-STAR	
	BAE MKG POLAR-STAR	
	or	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	PXV VHP FWA MIZAR-STAR	
Houston (HOU).....	J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (IAH)	FST J138 SAT LISSE-STAR	
Kennedy (JFK).....	FST J138 SAT GLAND-STAR	
	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	
	or	
	J146 DVC J197 GLD J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1400
	or	
	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1700-2359
Newark (EWR)	DAG J100 OBH J10 IOW J60 JOT J146 GIJ J554 CRL J584 SLT FQM-STAR.....	1700-1759 and 2100-2159
Pittsburgh (PIT)	JOT J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
	or	
	J146 DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	
Portland, OR (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500

Terminals	Route	Effective Times (UTC)
MONTEREY (MRY)		
Denver (DEN)	OAL J148 DTA J84 EKR TOMSN-STAR	1400-0000
OAKLAND (OAK)		
Chicago O'Hare (ORD)	(FL240 and above, Jets) to join ONL J94 DBQ JVL JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Detroit Metro-Wayne Co (DTW)	SAC FMG J94 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	SAC FMG J94 DBQ BAE MKG LAN SPRTN-STAR ...	1400-0400
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Newark (EWR)	SAC FMG J94 OBK J584 SLT FQM-STAR	0000-2359
	or	
	FMG J94 OBK J584 CRL J584 SLT FQM-STAR	
Phoenix (PHX)	OAL J92 DRK	1600-0500
ONTARIO (ONT)		
Chicago O'Hare (ORD)	(FL240 and above, All DC8, B747, B767, B727, DC10, L1011) DAG LAS BCE MTU OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
	or	
	(FL240 and above, All others) TRM J78 DRK J96 IRK BDF3	0000-2359
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	DAG OBH J100 DBQ BAE MKG POLAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	OBH J100 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	DAG J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1400-2200
Pittsburgh (PIT)	DAG J146 DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
Portland (PDX)	EHF J65 RBL	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN	1300-0500
Vancouver (CYVR)	EHF CZQ LIN	1800-2100
		and 2330-0200
PALM SPRINGS (PSP)		
Chicago O'Hare (ORD)	(FL240 and above, All DC8, B747, B767, B727, DC10, L1011) join ONL J94 DBQ JVL JVL-STAR	0000-2359
	or	
	(FL240 and above, All others) join DRK J96 IRK J26 BDF V10 PLANO	
PHOENIX (PHX)		
Chicago O'Hare (ORD)	J18 SLN J96 IRK BDF-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	CIE J2 ELP J50 INK JEN	1400-2300
Detroit Metro-Wayne (DTW)	BAE MKG POLAR-STAR	
	or	
	PXV VHP FWA MIZAR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	PAYSO GUP J102 ALS J13 FQF J128 DBQ BAE MKG LAN SPRTN-STAR	1100-0300
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	J18 GCK HYS PWE J192 IOW J60 JOT J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1429
	or	
	GUP J102 ALS PUB GLD J146 GIJ J554 JHW J70 LVZ LENDY-STAR	0000-1429
	or	
	GUP J102 ALS PUB GLD J197 OBH J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1430-2359

Terminals	Route	Effective Times (UTC)
Newark (EWR)	J18 GCK HYS PWE J192 IOW J60 JOT J146 GIJ J554 CRL J584 FQM-STAR	
	or	
	GUP J102 ALS PUB GLD J146 GIJ J554 CRL J584 FQM-STAR	0000-1459
Oakland (OAK)	J92 OAL ECA V195	1600-0500
San Francisco (SFO)	J92 OAL MOD	1600-0500
San Jose (SJC)	J92 OAL HYP	1600-0500
RENO (RNO)		
Chicago O'Hare (ORD)	J32 CZI J82 FSD J16 MCW JVL-STAR	0000-2359
Denver (DEN)	MVA EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
SACRAMENTO (SAC)		
Chicago O'Hare (ORD)	(FL240 and above, Jets) to join ONL J94 DBQ JVL JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Phoenix (PHX)	OAL J92 DRK	
SALT LAKE CITY (SLC)		
Boston (BOS)	TCH MCW J16 ECK BUF J16 ALB GDM GDM-STAR	
	or	
	OCS J107 DDY J158 ABR J70 GEP J106 GRB J38 ECK J16 ALB GDM-STAR	
	or	
	OCS J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD)	(FL240 and above, All) OCS J94 ONL J94 DBQ JVL JVL-STAR	0000-2359
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Kennedy (JFK)	OCS J94 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	0700-2359
SAN DIEGO (SAN)		
Chicago O'Hare (ORD)	IPL J18 SLN J96 IRK BDF-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Dallas/Fort Worth (DFW)	IPL J18 GBN J50 SSO J4 INK JEN	1400-2300
Detroit/Wayne (DFW)	BAE MKG POLAR-STAR	
	or	
	PXV VHP FWA MIZAR-STAR	
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	
Kennedy (JFK)	IPL J18 PXR J102 ALS PUB GLD J197 OBH J100 OBK J584 CRL J554 JHW J70 LVZ LENDY-STAR	1430-2359
Pittsburgh (PIT)	JOT J146 J34 DJB V30 ACO V337 CUTTA	1300-0100
	or	
	DVC J197 GLD J192 IOW J146 J34 DJB V30 ACO V337 CUTTA	
Portland (PDX)	EHF J65 RBL J1	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN J189 BTG OLM-STAR	1300-0500
Vancouver (CYVR)	EHF CZQ LIN J189 LMT J65 SEA PAE ACORD-STAR	1800-2100 and 2330-0200
SAN FRANCISCO (SFO)		
Boston (BOS)	FMG J94 DBQ BAE J16 ALB GDM-STAR	
Chicago O'Hare (ORD)	FMG J32 CZI J82 FSD J16 MCW JVL-STAR	1500-0400
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
	or	
	FMG J94 BAM J154 TCH J56 CHE TOMSN-STAR ..	1400-0000
Detroit Metro-Wayne (DTW)	PXV VHP FWA MIZAR-STAR	
	or	
	BAE MKG POLAR-STAR	

Terminals	Route	Effective Times (UTC)
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	SAC FMG J94 DBQ BAE MKG LAN SPRTN-STAR	1400-0400
Houston (HOU)	(Turbojets) PNH MQP ELLVR TEXNN-STAR	
Houston (IAH)	PNH MQP RIICE-STAR	
Kennedy (JFK)	FMG J94 OBK J584 CRL J554 JHW J70 LVZ	
	LENDY-STAR	0000-2359
Newark (EWR)	FMG J94 OBK J584 SLT FQM-STAR	0000-2359
Phoenix (PHX)	OAL J92 DRK	1600-0500
Pittsburgh (PIT)	FMG J94 BFF OBH DSM IOW J60 JOT J146 J34	
	DJB V30 ACO V337 CUTTA	1300-0100
Toronto (CYYZ)	FMG J32 ABR J70 GEP J106 GRB J38 ECK	
	YWT-STAR	
SAN JOSE (SJC)		
Chicago O'Hare (ORD)	(FL240 and above, All) J32 BAM J94 DBQ JVL	
	JVL-STAR	0000-2359
Denver (DEN)	J84 EKR TOMSN-STAR	1400-0000
Houston (HOU)	(Turbojets) LLO TEXNN-STAR	
Houston (IAH)	LLO RIICE-STAR	
Phoenix (PHX)	OAL J92 DRK	1600-0500
SANTA ANA (SNA)		
Chicago O'Hare (ORD)	TRM J78 DRK J96 IRK J26 BDF V10 PLANO	
Dallas/Fort Worth (DFW)	TRM J169 TFD J50 SSO J4 INK JEN	1400-2300
Detroit Metro-Wayne Co (DTW)	TRM PKE J96 DRK FLG J10 FQF J128 DBQ BAE	
	MKG POLAR-STAR	1100-0300
Portland (PDX)	EHF J65 RBL J1 OED	1300-0600
Seattle/Tacoma (SEA)	EHF CZQ LIN J189 LMT	1300-0500
TUCSON (TUS)		
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR	
Houston (HOU)	FST J138 SAT LISSE-STAR	
Houston (IAH)	FST J138 SAT GLAND-STAR	

SPECIAL HIGH ALTITUDE ARRIVAL ROUTES FOR DENVER TERMINAL AREA

SOUTHEAST	
Denver	over LAA QUAIL-STAR
SOUTH	
Denver	over TBE J171 TODDE QUAIL-STAR
.....	over ALS LARKS-STAR
.....	over HBU POWDR-STAR
SOUTHWEST	
Denver	over DVC J146 HBU POWDR-STAR
.....	over TBC ABOTS LARKS-STAR
.....	or
.....	over TBC J128 HBU POWDR-STAR
.....	over FMN LARKS-STAR
.....	over ALS LARKS-STAR
WEST	
Denver	over EKR TOMSN-STAR
.....	over TCH J56 CHE TOMSN-STAR
.....	over OCS J154 ALPOE RAMMS-STAR
NORTHWEST	
Denver	over MBW RAMMS-STAR
NORTH	
Denver	over BFF LANDR-STAR
NORTHEAST	
Denver	over ONL J114 SNY LANDR-STAR
.....	over OBH J10 LBF SAYGE-STAR
EAST	
Denver	over OBH J10 LBF SAYGE-STAR
.....	over GCK J154 RYLIE DANDD-STAR

SPECIAL HIGH ALTITUDE ARRIVAL ROUTES FOR SALT LAKE CITY TERMINAL AREA

SOUTHEAST

Salt Lake City over JNC J12 HELPR SPANE-STAR.....
 over EKR MTU SPANE-STAR

SOUTH

Salt Lake City over BCE DTA-TCH
 over MLF DTA-TCH

WEST

Salt Lake City over BVL BVL-STAR

NORTHWEST

Salt Lake City over BYI BEARR-STAR.....

NORTH

Salt Lake City over PIH BEARR-STAR
 over DBS BRIGHAM CITY-STAR

NORTHEAST

Salt Lake City over JAC BRIGHAM CITY-STAR

EAST

Salt Lake City over OCS BRIGHAM CITY-STAR

SPECIAL HIGH ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
Traffic overflying Salt Lake Center, westbound south of a line from Rock Springs VORTAC (OCS) to Mina VORTAC (MVA):		
Salt Lake City (ZLC)	TATOO DOUGLE MADWIN-STAR.....	
	or	
	RUMPS OAL MODESTO-STAR	
	or	
	TPH CANDA HYPER (RNAV)-STAR	
Traffic overflying Salt Lake Center, westbound north of a line from Rock Springs VORTAC (OCS) to Mina VORTAC (MVA):		
Salt Lake City (ZLC)	FMG RAIDR (RNAV)-STAR	
	or	
	FMG ILA PYE GOLDEN GATE-STAR	
	or	
	FMG HYPER (RNAV)-STAR	
Transcon flights overflying Salt Lake City Center, westbound south of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	DTA TATOO DUGLE MADWIN-STAR	
Salt Lake City (ZLC)	DTA RUMPS OAL MODESTO-STAR	
Salt Lake City (ZLC)	ILC TATOO DUGLE MADWIN-STAR	
Salt Lake City (ZLC)	ILC RUMPS OAL MODESTO-STAR	
Transcon flights overflying Salt Lake City Center, westbound Wasatch VORTAC (TCH) or north of (TCH):		
Salt Lake City (ZLC)	FMG RAIDR (RNAV)-STAR	
Salt Lake City (ZLC)	FMG ILA PYE GOLDEN GATE-STAR	
Traffic departing Salt Lake City Center, westbound south of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	TPH CANDA EL NIDO-STAR	
Traffic departing Salt Lake City Center, westbound from or north of Wasatch VORTAC (TCH):		
Salt Lake City (ZLC)	FMG EL NIDO-STAR	

HIGH ALTITUDE—SINGLE DIRECTION ROUTES

Airway	Segment Fixes	Direction Effective	Effective Times (UTC)
J110	Farmington, NM to Boulder City, NV.....	West	1500-0300

Q-ROUTES REGULATORY

Q1, Q3, Q5, Q7, Q9 and Q11 are preferred single direction (Southbound) Q routes; flight planning Northbound not authorized.

Q routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast and South Central A/FD volumes. Q routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.


GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".

Route	Segment	DME
Q1	ELMAA-ERAVE	BTG, OLM, HQM, HUH, UBG
	ERAVE-EASON	BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG
	EASON-EBINY	CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT
	EBINY-ENVIE	CVO, OED, EUG, LMT, RBL, ENI, ONP, FJS
	ENVIE-ETCHY	OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS
Q2	ETCHY-POINT REYES	LIN, ECA, RBL, ENI, SAC, OAK
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-HOBOL	BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS
	HOBOL-ITUCO	TFD, GBN, BLH, PXR, TUS, CIE, SSO
	ITUCO-NEWMAN	EWM, TFD, PXR, CIE, SSO, TUS, TCS
Q3	FEPTOT-FAMUK	OLM, TOU, HQM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG
	FAMUK-FRFLY	BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT
	FRFLY-FINER	OED, EUG, RBL, LMT, ENI, CVO, FJS
	FINER-FOWND	OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS
	FOWND-POINT REYES	LIN, ECA, PYE, RBL, SAC, ENI
Q4	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-SCOLE	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SCOLE-SPTFR	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SPTFR-ZEBOL	EED, IPL, BZA, GBN, TFD, PXR, BLH
	ZEBOL-SKTRR	PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS
Q5	SKTRR-EL PASO	EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME
	HAROB-HISKU	OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH
	HISKU-HARPR	ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV
	HARPR-HOMEG	CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV
	HOMEG-HUPTU	SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS
Q7	HUPTU-STIKM	OAK, ECA, PYE, LIN, SAC, ENI, RBL
	JINMO-JOGEN	CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA
	JOGEN-JUNEJ	LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG
	JUNEJ-JAGWA	RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS
	JAGWA-AVENAL	OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ
Q9	SUMMA-SMIGE	OLM, UBG, SEA, YKM, BTG, ONP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED, EPH, MWH
	SMIGE-SUNBE	IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG
	SUNBE-REBRG	RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED, SWR
	REBRG-DERBB	CZQ, PMD, EHF, LAX, RZS, AVE, MOD, ECA
	PAAGE-PAWLI	EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV, OED, SEA
Q11	PAWLI-PITVE	EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO
	PITVE-PUSHH	FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ
	PUSHH-LOS ANGELES	SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS
Q13	All segments	None; GNSS required
Q15	All segments	None; GNSS required
Q19	PLESS-NASHVILLE	ENL, GQO, PXV, BNA, IUI, FAM, BWG, CSX
Q20	CORONA-HONDS	CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME
	HONDS-UNNOS	CNX, INK, CME, TXO, TCC
	UNNOS-FUSCO	FST, ACH, INK, CME, SGT, TXO, TCC
	FUSCO-JUNCTION	ABI, CWK, CSI, INK, LZZ, JCT, SGT, STV, FST
	JONEZ-RAZORBACK	BYP, EOS, TUL, TXK, ADM, RZC, OKM
Q21	GUSTI-OYSTY	AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV
Q22	OYSTY-ACMES	RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJI
	ACMES-CATLN	SJI, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI
Q23	FORT SMITH-RAZORBACK	OKM, RZC, EOS, TUL

Route	Segment	DME
Q24	LAKE CHARLES-BATON ROUGE	AEX, DAS, LCH, MCB, LFT, BTR
	BATON ROUGE-IRUBE	AEX, LEV, MCB, LCH, RQR, HRV, BTR, GCV, MCB, PCU, SJI, LBY
	IRUBE-PAYTN	GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI
Q25	MEEOW-WALNUT RIDGE	ELD, MEM, LIT, FAM, RZC
	WALNUT RIDGE-WLSUN	MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH
	WLSUN-POCKET CITY	BWG, PXV, ENL, BNA, TTH
Q26	WALNUT RIDGE-DEVAC	LIT, JKS, GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG
Q27	FORT SMITH-ZALDA	OKM, SGF, RZC, EOS, TUL
Q28	GRAZN-PYRMD	EIC, LIT, ELD, OKM, TXK
	PYRMD-HAKAT	ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK
	HAKAT-ESTEE	ARG, LIT, FAM, SGF, MEM
	ESTEE-POCKET CITY	ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA
Q29	HARES-MEMPHIS	MEM, ARG, LIT, JAN, ELD, SQS
	MEMPHIS-SIDAE	MEM, PXV, BNA, BWG, ARG, ENL
	SIDAE-POCKET CITY	PXV, TTH, BWG, ENL
Q30	SIDON-VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
Q31	DHART-JODOX	SQS, LIT, TXK
	JODOX-MARVELL	SQS, LIT, ELD, MEM, ARG
	MARVELL-TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
	TIIDE-POCKET CITY	BWG, PXV, ENL, TTH
Q32	EL DORADO-GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
	GAGLE-CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
	CRAMM-NASHVILLE	BWG, MEM, VUZ, BNA, GQO
	NASHVILLE-SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
Q33	DHART-LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
	LITTLE ROCK-PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
Q34	TEXARKANA-MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
	MATIE-MEMPHIS	LIT, ARG, MEM, ELD, SQS
	MEMPHIS-SWAPP	BWG, ARG, MEM, MKL, SQS, PXV, BNA, GQO, IIU, VXV
Q35	KIMBERLY-NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
	NEERO-WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
	WINEN-CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
	CORKR-DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
Q36	RAZORBACK-TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
	TWITS-DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
	DEPEC-NASHVILLE	GQO, BWG, BNA, PXV, IIU
	NASHVILLE-SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
Q38	ROKIT-INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
	INCIN-LAREY	JAN, MCB, SWB, AEX
	LAREY-BESOM	JAN, JYU, MEI, SQS, VUZ
Q40	ALEXANDRIA-DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
	DOOMS-WINAP	JAN, SQS, MEI, MCB
	WINAP-MISLE	MEI, VUZ, JYU
Q42	KIRKSVILLE-STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
	STRUK-DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK, OBK, GIJ, FWA, GSH, IRK
	DANVILLE-MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
	MUNCIE-HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN, AIR, HVQ, CXR, EWC
	HIDON-BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
	BUBAA-PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
	PSYKO-BRNNAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
	BRNNAN-MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
	MAALS-SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
	SUZIE-EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
	EAST TEXAS-ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
Q104	DEFUN-HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
	HEVVN-PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
	PLYER-SWABE	PIE, ORL, OMN, SRQ, TAY
	SWABE-ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
	ST PETERSBURG-CYPRESS	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN

Route	Segment	DME
Q106	SMELZ-BULZI BULZI-DRABK DRABK-GADAY	LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI MGM, PZD, OTK, JYU, SZW, CEW, SJI
Q108	GADAY-CLAWZ	MGM, SJI, CEW, JYU, PZD, OTK, MCN, SZW, LGC, TAY, AMG
Q110	THNDR-JAYMC JAYMC-RVERO RVERO-KPASA KPASA-BRUTS BRUTS-GULFR GULFR-FEONA	SRQ, VRB, PIE, LAL, VKZ, ORL, PBI VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP OMN, PIE, PBI, SRQ, ORL, LAL SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM
Q112	DEFUN-HEVVN HEVVN-INPIN	PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG
Q116	KPASA-BRUTS BRUTS-GULFR GULFR-CEEYA	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK MCN, AMG, PZD, OTK, SZW, TAY
Q118	KPASA-BRUTS BRUTS-LENIE	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN
Q501	VIXIS-GOPHER	ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU, DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF
Q502	GOPHER-SOBME KENPA-GOPHER	FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW, MSP, MNM, ASP, TVC, GEP, RWF, BRD
Q504	GOPHER-SOBME NOTAP-CESNA	FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD SSM, ECK, APN, GLR, PLN, ISQ, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC, SAW, GRB, BRD
Q505	CESNA-HEMDI OMAGA-RIMBE RIMBE-CESNA CESNA-HEMDI	ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD SSM, TVC, ASP, SAW, GRB SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

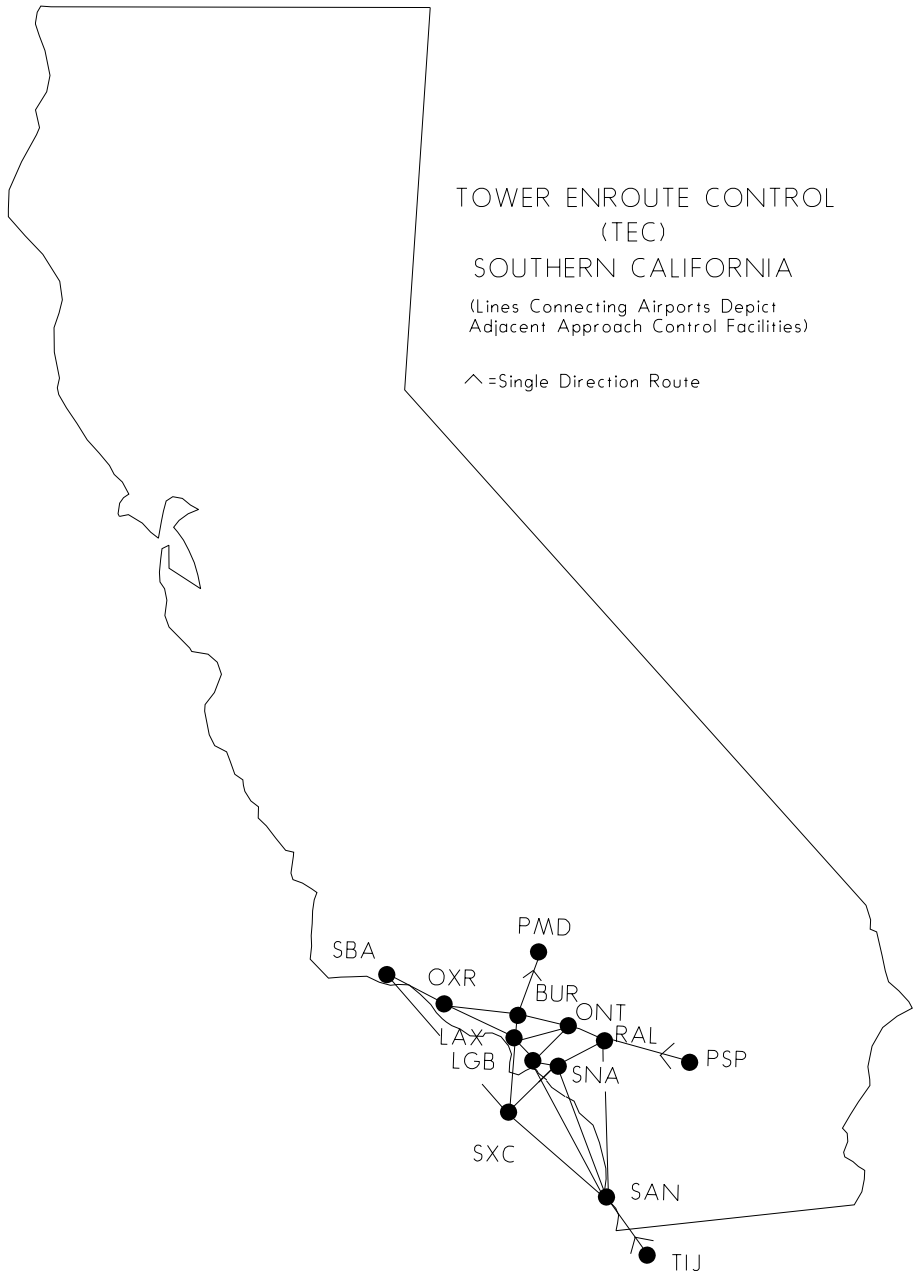

TOWER ENROUTE CONTROL (TEC)

Within the national airspace system it is possible for a pilot to fly IFR from one point to another without leaving approach control airspace. This is referred to as "Tower Enroute" which allows flight beneath the enroute structure. The tower enroute concept has been expanded (where practical) by reallocating airspace vertically/geographically to allow flight planning between city pairs while remaining within approach control airspace. Pilots are encouraged to use the TEC route descriptions provided in the Southwest U.S. Airport/Facility Directory when filing flight plans. Other airways which appear to be more direct between two points may take the aircraft out of approach control airspace thereby resulting in additional delays or other complications. All published TEC routes are designed to avoid enroute airspace and the majority are within radar coverage. The following items should be noted before using the graphics and route descriptions.

1. The graphic is not to be used for navigation nor detailed flight planning. Not all city pairs are depicted. It is intended to show geographic areas connected by tower enroute control. Pilots should refer to route descriptions for specific flight planning.

2. The route description contains four columns of information after geographic area listed in the heading, where the departure airport is located; i.e., the airport/airports of intended landing using FAA three letter/letter-two number identifiers, the coded route number (this should be used when filing the flight plan and will be used by ATC in lieu of reading out the full route description), the specific route (airway, radial, etc.), the altitude allowed for type of aircraft and the routes.

3. The word "DIRECT" will appear as the route when radar vectors will be used or no airway exists. Also this indicates that a Standard Instrument Departure (SID) or Standard Terminal Arrival (STAR) may be applied by ATC.

4. When a NAVAID or intersection identifier appears with no airway immediately preceding or following the identifier, the routing is understood to be DIRECT to or from that point unless otherwise cleared by ATC or radials are listed (See item 5).

5. Routes beginning and ending with an airway indicate that the airway essentially overflies the airport or radar vectors will be applied.

6. Where more than one route is listed to the same destination, ensure you file correct route for type of aircraft which is denoted after the route in the altitude column using J,M,P, or Q. These are listed after item 10 under Aircraft Classification.

7. Although all airports are not listed under the destination column, IFR flight may be planned to satellite airports in the proximity of major airports via the same routing.

8. Los Angeles International Airport (LAX) and four other airports (ONT-SAN-TOA-SNA) have two options due to winds and these affect the traffic flows and runways in use. To indicate the difference the following symbols are used after the airport: Runway Number, W for west indicating normal conditions, E for East, and N for North indicating other than normal operation. If nothing follows the airport use this route on either West, East, or North plan. Other destinations have different arrivals due to LAX being East and they have the notation "(LAXE)." Torrance Airport is also unique in that the airport is shared between Los Angeles and Coast area of Southern California TRACON; for Runway 11 departures use Coast area routings and for Runway 29 departures use Los Angeles area routings.

9. When filing flight plans, the coded route identifier, i.e. SANL2, VTUL4, POML3 may be used in lieu of the route of flight.

10. Aircraft types i.e. J, M, P, and Q are listed at the beginning of the altitude and should be used with the route of flight filed. (See Aircraft Classification below). The altitudes shown are to be used for the route. This allows for separation of various arrival routes, departure routes, and overflights to, from, and over all airports in the Southern California area.

LEGENDS

AIRCRAFT CLASSIFICATION

(J) = Jet powered

(M) = Turbo Props/Special (cruise speed 190 knots or greater)

(P) = Non-jet (cruise speed 190 knots or greater)

(Q) = Non-jet (cruise speed 189 knots or less)

BURBANK AREA**FROM:** BUR VNY WHP

TO:	ROUTE ID	ROUTE	ALTITUDE
HHR	BURN1	V186 ADAMM V394 HHR RY25 LOC	PQ50
HHR	BURN2	V186 V264 POM V394 HHR RY25 LOC ..	JM70
HHR (LAXE)	BURN3	VNY095R ELM00	JMPQ50
LAX	BURN4	VNY095R PURMS	JMPQ50
LAX (LAXE)	BURN5	VNY SMO	JM50PQ40
SMO	BURN6	VNY095R DARTS	JMPQ50
CCB	BURN7	V186 V264 POM	JM70PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	BURN8	V186 PDZ	PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	BURN9	V186 V264 POM V197 PDZ	JM70
HMT	BURN10	V186 PDZ V186 WESIN	PQ50
HMT	BURN11	V186 V264 POM V197 PDZ V186	
		WESIN	JM70
L67	BURN12	V186 PDZ PDZ078R EDITS	PQ50
L67	BURN13	V186 V264 POM V197 PDZ PDZ078R	
		EDITS	JM70
F70	BURN14	V186 PDZ V186 NIKKL	PQ50
F70	BURN15	V186 V264 POM V197 PDZ V186	
		NIKKL	JM70
AVX	BURN16	V186 BAYJY V363 DANAH SXC065R	
		SXC	PQ50
AVX	BURN17	TWINE V518 KIMMO V459 SLI V21 SXC .	JM90
AVX (LAXE)	BURN18	V186 BAYJY V363 DANAH SXC065R	
		SXC	JM50
LGB FUL SLI TOA	BURN19	V186 ADAMM V394 SLI	PQ50
SNA	BURN20	V186 BAYJY V363 POXKU V8 SLI	PQ50
LGB SNA FUL SLI TOA	BURN21	TWINE V518 KIMMO V459 SLI	JM90
FUL SLI TOA (LAXE)	BURN22	V186 ADAMM V394 SLI	JM50
SNA (LAXE)	BURN23	V186 BAYJY V363 POXKU V8 SLI	JM50
LGB (LAXE)	BURN24	V186 ADAMM V394 SLI	M50
LGB (LAXE)	BURN25	V186 BAYJY V363 DANAH V23 SLI	J70
CRQ NFG NKX OKB	BURN26	V186 ROBNN V458 OCN	PQ70
CRQ NFG NKX OKB	BURN27	TWINE V518 KIMMO V459 SLI V23	
		OCN	JM90
CRQ NFG NKX OKB (LAXE)	BURN28	V186 BAYJY V363 DANAH V23 OCN	JM70
MYF NRS NZY SAN SDM SEE	BURN29	V186 HAILE V66 MZB	PQ90
MYF NRS NZY SAN SDM SEE	BURN30A	TWINE V518 KIMMO V459 SLI V23	
		KELPS MZB	M90
MYF NRS NZY SAN SDM SEE	BURN30B	TWINE V518 KIMMO V459 SLI SLI171	
		LAX118 CARDI MZB320 MZB	J110
MYF NRS NZY SAN SDM SEE (LAXE)	BURN31	V186 BAYJY V363 DANAH V23 KELPS	
		MZB	J110M90
SAN (SANE)	BURN32	V186 BAYJY V363 DANAH V165 SARGS .	PQ50
SAN (SANE)	BURN33	TWINE V518 KIMMO V459 SLI V165	
		SARGS	J110M90
SAN (SANE) (LAXE)	BURN34	V186 POM164R V25 REDIN V165	
		SARGS	JM70
RNM	BURN35	V186 ROBNN V208 JLI	PQ70
RNM	BURN36	TWINE V518 KIMMO V459 SLI V23 OCN	
		V208 JLI	JM90
RNM (LAXE)	BURN37	V186 BAYJY V363 DANAH V23 OCN	
		V208 JLI	JM70
OXR CMA NTD	BURN38	FIM	JMPQ40
SBA	BURN39	FIM V186 DEANO V27 KWANG	JMPQ60

COAST AREA**FROM:** FUL LGB SLI SNA TOA (RWY11)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	CSTN1	SLI V23 POPPR SMO125R SMO	
		SMO311R SILEX	PQ40
BUR	CSTN2	SLI V23 LAX LAX316R SILEX	JM60
WHP VNY	CSTN3	SLI V23 POPPR SMO125R SMO	
		SMO317R CANOG	PQ40
WHP VNY	CSTN4	SLI V23 LAX LAX320R CANOG	JM60
BUR VNY WHP (LAXE)	CSTN5	SLI SLI333R V186 VNY	JMPQ60
HHR	CSTN6	SLI SLI340R WELLZ HHR RY25 LOC	JM70PQ40

LAX	CSTN7	SLI	JM70PQ40
LAX (LAXE)	CSTN8	SLI V8 TANDY	JM50PQ40
TO:	ROUTE ID	ROUTE	ALTITUDE
SMO	CSTN9	SLI V23 POPPR SMO125R SMO	
		SMO059R ELM00	PQ40
SMO	CSTN10	SLI V459 DARTS	JM80
SMO (LAXE)	CSTN11	SLI SLI333R V186 DARTS	JMPQ60
CCB EMT POC	CSTN12	SLI V8 POXKU V363 POM	JMPQ50
CNO REI L65 AJO ONT RAL RIR RIV SBD	CSTN13	SLI V8 PDZ	JM60PQ50
HMT	CSTN14	SLI V8 PDZ V186 WESIN	JM60PQ50
L67	CSTN15	SLI V8 PDZ PDZ078R EDITS	JM60PQ50
F70	CSTN16	SLI V8 PDZ V186 NIKKL	JM60PQ50
CRQ NFG NKX OKB	CSTN17	V25 PACIF V208 OCN	JM70
RNM	CSTN18	V25 PACIF V208 JLI	JM70
MYF NRS NZY SAN SDM SEE	CSTN19	V25 PACIF V208 LAX118R CARDI	
		MZB320R MZB	J110M90
SAN (SANE)	CSTN20	V25 REDIN V165 SARGS	J110M90
SBA	CSTN21	SLI V23 LAX V299 VTU VTU282R	
		KWANG	PQ60
SBA (LAXE)	CSTN22	SLI SLI333R V186 DEANO V27 KWANG..	MPQ60
SBA (LAXE)	CSTN23	SXC V208 VTU VTU282R KWANG	J100
NTD OXR CMA	CSTN24	SLI V23 POPPR SMO125R SMO VNY	PQ40
NTD CMA OXR (LAXE)	CSTN25	SLI SLI333R V186 FIM	MPQ60
FROM: LGB			
TO:	ROUTE ID	ROUTE	ALTITUDE
SBA	CSTN26	LAX V299 VTU VTU282R KWANG	J100M80
NTD OXR CMA	CSTN27	SLI V23 LAX VNY	JM60
FROM: FUL SLI SNA TOA (RWY11)			
TO:	ROUTE ID	ROUTE	ALTITUDE
SBA	CSTN28	SXC V208 VTU VTU282R KWANG	J100M80
NTD OXR CMA	CSTN29A	SLI V23 LAX VNY	M60
NTO OXR CMA	CSTN29B	SXC V208 VTU	J80
FROM: SNA			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN30	V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	CSTN31	V23 MZB	PQ50
RNM	CSTN32	V23 OCN V208 JLI	PQ70
SAN (SANE)	CSTN33	V23 OCN V165 SARGS	PQ50
FROM: FUL LGB SLI TOA (RWY11) when SNA South traffic			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN34	SLI V64 V363 DANAH V23 OCN	PQ50
RNM	CSTN35	SLI V64 V363 DANAH V23 OCN V208 JLI	PQ70
MYF NRS NZY SAN SDM SEE	CSTN36	SLI V64 V363 DANAH V23 MZB	PQ50
SAN (SANE)	CSTN37	SLI V64 V363 DANAH V165 SARGS	PQ50
FROM: FUL LGB SLI TOA (RWY 11) when SNA North traffic			
TO:	ROUTE ID	ROUTE	ALTITUDE
CRQ NFG NKX OKB	CSTN38	V23 OCN	PQ50
MYF NRS NZY SAN SDM SEE	CSTN39	V23 MZB	PQ50
RNM	CSTN40	V23 OCN V208 JLI	PQ70
SAN (SANE)	CSTN41	V23 OCN V165 SARGS	PQ50
FROM: AVX			
TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	CSTN42	SXC V21 SLI V23 POPPR SMO125R	
		SMO SMO311R SILEX	PQ40
BUR (LAXE)	CSTN43	SXC V21 SLI V23 LAX LAX316R SILEX ...	PQ40
BUR	CSTN44	SXC V21 SLI V23 LAX LAX316R SILEX ...	JM60
WHP VNY	CSTN45	SXC V21 SLI V23 POPPR SMO125R	
		SMO SMO317R CANOG	PQ40
WHP VNY (LAXE)	CSTN46	SXC V21 SLI V23 LAX LAX320R CANOG .	PQ40
WHP VNY	CSTN47	SXC V21 SLI V23 LAX LAX320R CANOG .	JM60
CCB EMT POC	CSTN48	SLI V8 POXKU V363 POM	JMPQ50

CNO REI L65 AJO ONT RAL RIR RIV SBD....	CSTN49	SLI V8 PDZ	JM60PQ50
L67	CSTN50	SLI V8 PDZ PDZ078R EDITS	JM60PQ50
F70	CSTN51	SLI V8 PDZ V186 NIKKL	JM60PQ50
TO:	ROUTE ID	ROUTE	ALTITUDE
HMT	CSTN52	SLI V8 PDZ V186 WESIN	JM60PQ50
CRQ NFG NKX OKB	CSTN53	SXC V208 OCN	JMPQ50
MYF NRS NZY SAN SDM SEE	CSTN54	SXC V208 LAX118R CARDI MZB320R	
		MZB	J110M90
RNM	CSTN55	SXC V208 JLI	JMPQ70
MYF NRS NZY SAN SDM SEE	CSTN56	SXC V208 OCN V23 MZB	PQ50
SAN (SANE)	CSTN57	SXC V208 OCN V165 SARGS	PQ50
NTD OXR CMA	CSTN58	SXC V208 VTU	JM80PQ60
SBA	CSTN59	SXC V208 VTU VTU282R KWANG	J100M80PQ60

LOS ANGELES AREA**FROM:** LAX West (J Class)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	LAXN1	LAX316R SILEX	J50
WHP VNY	LAXN2	LAX320R CANOG	J50
AVX	LAXN3	LAXX DP SLI V21 SXC	J50
FUL LGB SLI SNA TOA	LAXN4	LAXX DP SLI	J50
CCB EMT POC	LAXN5	LAXX DP SLI V8 POXKU V363 POM	J90
CNO REI L65 AJO RAL RIR RIV SBD ONT....	LAXN6	LAXX DP SLI V8 PDZ	J90
HMT	LAXN7	LAXX DP SLI V8 PDZ V186 WESIN	J90
L67	LAXN8	LAXX DP SLI V8 PDZ PDZ078R EDITS.....	J90
F70	LAXN9	LAXX DP SLI V8 PDZ V186 NIKKL	J90
CRQ NFG NKX OKB	LAXN10	LAXX DP SLI SLI171R ALBAS V25 PACIF	
		V208 OCN	J110
MYF NRS NZY SAN SDM SEE	LAXN11	LAXX DP MZB	J110
RNM	LAXN12	LAXX DP SLI SLI171R ALBAS V25 PACIF	
		V208 JLI	J110
SAN (SANE)	LAXN13	LAXX DP SLI SLI171R ALBAS V25 REDIN	
		V165 SARGS	J110
OXR CMA NTD	LAXN14	VENTURA DP VTU	J60
SBA	LAXN15	VENTURA DP VTU VTU282R KWANG	J100

FROM: LAX East (J Class)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	LAXN16	LAX316R SILEX	J50
WHP VNY	LAXN17	LAX320R CANOG	J50
AVX	LAXN18	LAXX DP SLI V21 SXC	J50
FUL LGB SLI SNA TOA	LAXN19	LAXX DP SLI	J40
CCB EMT POC	LAXN20	LAXX DP SLI V8 POXKU V363 POM	J90
CNO REI L65 AJO RAL RIR RIV SBD ONT....	LAXN21	LAXX DP SLI V8 PDZ	J90
HMT	LAXN22	LAXX DP SLI V8 PDZ V186 WESIN	J90
L67	LAXN23	LAXX DP SLI V8 PDZ PDZ078R EDITS.....	J90
F70	LAXN24	LAXX DP SLI V8 PDZ V186 NIKKL	J90
CRQ NFG NKX OKB	LAXN25	LAXX DP SLI SLI148R V25 PACIF V208	
		OCN	J110
MYF NRS NZY SAN SDM SEE	LAXN26	LAXX DP SLI SLI148R V25 PACIF V208	
		LAX118R CARDI	
RNM	LAXN27	MZB320R MZB	J110
		LAXX DP SLI SLI148R V25 PACIF V208	
SAN (SANE)	LAXN28	JLI	J110
		LAXX DP SLI SLI148R V25 REDIN V165	
OXR CMA NTD	LAXN29	SARGS	J110
SBA	LAXN30	VENTURA DP VTU	J60
		VENTURA DP VTU VTU282R KWANG	J100

FROM: LAX West and East (M Class)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	LAXN31	LAX316R SILEX	M50
WHP VNY	LAXN32	LAX320R CANOG	M50
AVX	LAXN33	SEAL BEACH DP SLI V21 SXC	M50
FUL LGB SLI SNA TOA	LAXN34	SEAL BEACH DP SLI	M50
CCB EMT POC	LAXN35	SEAL BEACH DP SLI V8 POXKU V363	
		POM	
CNO REI L65 AJO RAL RIR RIV SBD ONT....	LAXN36	SEAL BEACH DP SLI V8 PDZ	M50

TO:	ROUTE ID	ROUTE	ALTITUDE
HMT	LAXN37	SEAL BEACH DP SLI V8 PDZ V186	
L67	LAXN38	WESIN	M50
F70	LAXN39	SEAL BEACH DP SLI V8 PDZ PDZ078R	
CRQ NFG NKX OKB (LAXW)	LAXN40	EDITS	M50
CRQ NFG NKX OKB (LAXE)	LAXN41	SEAL BEACH DP SLI V8 PDZ V186	
MYF NRS NZY SAN SDM SEE (LAXW)	LAXN42	NIKKL	M50
MYF NRS NZY SAN SDM SEE (LAXE)	LAXN43	SEAL BEACH DP SLI SLI171R ALBAS	
SAN (SANE) (LAXW)	LAXN44	V25 PACIF V208 OCN	M90
SAN (SANE) (LAXE)	LAXN45	SEAL BEACH DP SLI SLI148R V25 PACIF	
RNM(LAXW)	LAXN46	V208 OCN	M90
RNM(LAXE)	LAXN47	SEAL BEACH DP SLI SLI171R ALBAS	
OXR CMA NTD (LAXW)	LAXN48	V25 PACIF V208 JLI	M90
OXR CMA NTD (LAXE)	LAXN49	SEAL BEACH DP SLI SLI148R V25 PACIF	
SBA (LAXW)	LAXN50	V208 MZB320R MZB	M90
SBA (LAXE)	LAXN51	SEAL BEACH DP SLI SLI171R ALBAS	
		V25 PACIF V208 LAX118R	
		CARDI MZB320R MZB	M90
		SEAL BEACH DP SLI SLI148R V25 PACIF	
		V208 MZB320R MZB	M90
		SEAL BEACH DP SLI SLI171R ALBAS	
		V25 REDIN V165 SARGS	M90
		SEAL BEACH DP SLI SLI148R V25	
		REDIN V165 SARGS	M90
		SEAL BEACH DP SLI SLI171R ALBAS	
		V25 PACIF V208 JLI	M90
		SEAL BEACH DP SLI SLI148R V25 PACIF	
		V208 JLI	M90
		VENTURA DP VTU	M60
		CHATY DP VTU	M60
		VENTURA DP VTU VTU282R KWANG	M60
		CHATY DP KWANG	M60

FROM: LAX West and East (P and Q Class)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	LAXN52	LAX316R SILEX	PQ40
WHP VNY	LAXN53	LAX320R CANOG	PQ40
AVX	LAXN54	SEAL BEACH DP SLI V21 SXC	PQ40
FUL LGB SLI SNA TOA	LAXN55	SEAL BEACH DP SLI	PQ40
CCB EMT POC	LAXN56	SEAL BEACH DP SLI V8 POXKU V363	
CNO REI L65 AJO RAL RIR RIV SBD ONT ...	LAXN57	POM	PQ50
HMT	LAXN58	SEAL BEACH DP SLI V8 PDZ	PQ50
L67	LAXN59	SEAL BEACH DP SLI V8 PDZ V186	
F70	LAXN60	WESIN	PQ50
CRQ NFG NKX OKB	LAXN61	SEAL BEACH DP SLI V8 PDZ PDZ078R	
CRQ NFG NKX OKB (SNAN)	LAXN62	EDITS	PQ50
MYF NRS NZY SAN SDM SEE	LAXN63	SEAL BEACH DP SLI V8 PDZ V186	
MYF NRS NZY SAN SDM SEE (SNAN)	LAXN64	NIKKL	PQ50
RNM	LAXN65	SEAL BEACH DP SLI V64 V363 DANAH	
RNM (SNAN)	LAXN66	V23 OCN	PQ50
SAN (SANE)	LAXN67	SEAL BEACH DP SLI V23 OCN	PQ50
OXR CMA NTD	LAXN68	SEAL BEACH DP SLI V64 V363 DANAH	
SBA (LAXW)	LAXN69	V23 MZB	PQ50
SBA (LAXE)	LAXN70	SEAL BEACH DP SLI V23 MZB	PQ50
		SEAL BEACH DP SLI V64 V363 DANAH	
		V23 OCN JLI	PQ70
		SEAL BEACH DP SLI V23 OCN V208 JLI ..	PQ70
		SEAL BEACH DP SLI V64 V363 DANAH	
		V165 SARGS	PQ50
		VNY	PQ40
		VENTURA DP VTU VTU282R KWANG	PQ60
		CHATY DP KWANG	PQ60

FROM: HHR TOA (RWY29)

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SCTN1	SMO SMO311R SILEX	JM50PQ40
WHP VNY	SCTN2	SMO SMO317R CANOG	JM50PQ40
AVX	SCTN3	SXC	JM50PQ40
FUL LGB SLI SNA TOA	SCTN4	LIMBO V64 SLI	JM50PQ40
FUL LGB SLI SNA TOA (LAXE)	SCTN5	SLI	JMPQ40
CCB EMT POC	SCTN6	LIMBO V64 SLI V8 POXKU V363 POM ...	J90MPQ50
CNO REI L65 AJO RAL RIR RIV SBD ONT ...	SCTN7	LIMBO V64 SLI V8 PDZ	J90MPQ50
HMT	SCTN8	LIMBO V64 SLI V8 PDZ V186 WESIN	J90MPQ50

TO:	ROUTE ID	ROUTE	ALTITUDE
L67	SCTN9	LIMBO V64 SLI V8 PDZ PDZ078R EDITS.	J90MPQ50
F70	SCTN10	LIMBO V64 SLI V8 PDZ V186 NIKKL	J90MPQ50
CRQ NFG NKX OKB	SCTN11	LIMBO V64 V363 DANAH V23 OCN.....	PQ50
CRQ NFG NKX OKB	SCTN12	LIMBO V64 SLI V23 OCN	J110M90
CRQ NFG NKX OKB (LAXE)	SCTN13	SLI SLI148R V25 PACIF V208 OCN.....	J110M90
CRQ NFG NKX OKB (SNAN)	SCTN14	LIMBO V64 SLI V23 OCN.....	PQ50
MYF NRS NZY SAN SDM SEE	SCTN15	LIMBO V64 V363 DANAH V23 MZB.....	PQ50
MYF NRS NZY SAN SDM SEE (LAXE)	SCTN16	SLI V64 V363 DANAH V23 MZB	PQ50
MYF NRS NZY SAN SDM SEE	SCTN17	LIMBO V64 WILMA V25 PACIF V208	
		LAX118R CARDI MZB320R MZB.....	J110M90
MYF NRS NZY SAN SDM SEE (LAXE)	SCTN18	SLI SLI148R V25 PACIF V208 MZB320R	
		MZB	J110M90
MYF NRS NZY SAN SDM SEE (SNAN)	SCTN19	LIMBO V64 SLI V23 MZB.....	PQ50
RNM.....	SCTN20	LIMBO V64 V363 DANAH V23 OCN	
		V208 JLI	PQ70
RNM (SNAN)	SCTN21	LIMBO V64 SLI V23 OCN V208 JLI	PQ70
RNM	SCTN22	LIMBO V64 SLI V23 OCN V208 JLI	J110M90
RNM (LAXE)	SCTN23	SLI SLI148R V25 PACIF V208 JLI	J110M90
SAN (SANE)	SCTN24	LIMBO V64 V363 DANAH V165 SARGS ..	PQ50
SAN (SANE)	SCTN25	LIMBO V64 WILMA V25 REDIN V165	
		SARGS.....	J110M90
OXR CMA NTD.....	SCTN26	SMO VNY	PQ40
OXR CMA NTD.....	SCTN27	LAX VTU	JM60
SBA.....	SCTN28	SMO V107 SADDE V299 VTU VTU282R	
		KWANG	J100MPQ60
SBA (LAXE)	SCTN29	LAX V23 V186 DEANO V27 KWANG	JM50PQ40
EDW L00 MHV PMD WJF IYK NID TSP			
VCV	SCTN30	LAX V165 LANGE V518 PMD.....	JMPQ70
FROM: SMO			
TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SMON1	SMO SMO311R SILEX.....	JM50PQ40
WHP VNY	SMON2	SMO SMO317R CANOG	JM50PQ40
AVX	SMON3	SMO SMO125R SXC350R SXC.....	M50PQ40
FUL LGB SLI SNA TOA	SMON4	SMO SMO125R V64 SLI.....	M50PQ40
FUL LGB SLI SNA TOA	SMON5	SLI	J50
FUL LGB SLI SNA TOA (LAXE)	SMON6	SMO LAX V23 SLI.....	JMPQ40
CCB EMT POC.....	SMON7	SMO SMO125R V64 SLI V8 POXKU	
		V363 POM.....	MPQ50
CCB EMT POC.....	SMON8	SLI V8 POXKU V363 POM	J90
CNO REI L65 AJO RAL RIR RIV SBD ONT....	SMON9	SMO SMO125R V64 SLI V8 PDZ	MPQ50
CNO REI L65 AJO RAL RIR RIV SBD ONT....	SMON10	SLI V8 PDZ	J90
HMT	SMON11	SMO SMO125R V64 SLI V8 PDZ V186	
		WESIN	MPQ50
HMT	SMON12	SLI V8 PDZ V186 WESIN	J90
L67	SMON13	SMO SMO125R V64 SLI V8 PDZ	
		PDZ078R EDITS	MPQ50
L67	SMON14	SLI V8 PDZ PDZ078R EDITS	J90
F70	SMON15	SMO SMO125R V64 SLI V8 PDZ V186	
		NIKKL	MPQ50
F70	SMON16	SLI V8 PDZ V186 NIKKL	J90
CRQ NFG NKX OKB	SMON17	SMO SMO125R V64 V363 DANAH V23	
		OCN	PQ50
CRQ NFG NKX OKB	SMON18	SMO SMO125R V64 SLI V23 OCN	M90
CRQ NFG NKX OKB	SMON19	SXC V208 OCN	J110
CRQ NFG NKX OKB (LAXE)	SMON20	SMO LAX V23 SLI SLI148R V25 PACIF	
		V208 OCN.....	J110M90
CRQ NFG NKX OKB (SNAN)	SMON21	SMO SMO125R V64 SLI V23 OCN.....	PQ50
MYF NRS NZY SAN SDM SEE	SMON22	SMO SMO125R V64 V363 DANAH V23	
		MZB	PQ50
MYF NRS NZY SAN SDM SEE (LAXE)	SMON23	SMO LAX V23 SLI V64 V363 DANAH	
		V23 MZB	PQ50
MYF NRS NZY SAN SDM SEE	SMON24	SMO SMO125R V64 SLI V23 MZB.....	M90
MYF NRS NZY SAN SDM SEE	SMON25	SXC V208 LAX118R CARDI MZB320R	
		MZB	J110
MYF NRS NZY SAN SDM SEE (LAXE)	SMON26	SMO LAX V23 SLI SLI148R V25 PACIF	
		V208 LAX118R CARDI MZB320R MZB ...	J110M90
MYF NRS NZY SAN SDM SEE (SNAN)	SMON27	SMO SMO125R V64 SLI V23 MZB.....	PQ50

TO:	ROUTE ID	ROUTE	ALTITUDE
RNM	SMON28	SMO SMO125R V64 V363 DANAH V23	
RNM (SNAN)	SMON29	OCN V208 JLI	PQ70
RNM	SMON30	SMO SMO125R V64 SLI V23 OCN V208	
RNM	SMON31	JLI	PQ70
RNM (LAXE)	SMON32	SXC V208 JLI	M90
SAN (SANE)	SMON33	SMO LAX V23 SLI V23 OCN V208 JLI	J110
		SMO SMO125R V64 V363 DANAH V165	J110M90
SAN (SANE)	SMON34	SARGS	PQ50
SAN (SANE)	SMON35	SMO SMO125R V64 SLI V165 SARGS ...	M90
		SXC V208 PACIF V25 REDIN V165	
		SARGS	J110
OXR CMA NTD	SMON36	SMO VNY	PQ40
OXR CMA NTD	SMON37	VTU	JM60
SBA	SMON38	SMO V107 SADDE V299 VTU VTU282R	
		KWANG	J100MPQ60
SBA (LAXE)	SMON39	LAX V23 V186 DEANO V27 KWANG	JM50PQ40

EMPIRE AREA

FROM: CCB CNO EMT HMT REI L65 AJO L67
RAL RIR RIV SBD F70 ONT POC

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	ONTN1	PDZ V186 VNY	PQ60
BUR VNY WHP	ONTN2	PDZ V197 POM V264 V186 VNY	JM80
HHR	ONTN3	PDZ PDZ270R HHR RY25 LOC	JMPQ30
LAX	ONTN4	PDZ PDZ270R LAX RWY 24R LOC	JMPQ40
LAX (LAXE)	ONTN5	PDZ PDZ270R V394 AHEIM V8 TANDY ...	PQ40
LAX (LAXE)	ONTN6	PDZ V16 PRADO V363 DANAH V23 SLI	
		V8 TANDY	JM80
SMO	ONTN7	PDZ V186 DARTS	JMPQ60
AVX	ONTN8	PDZ V16 PRADO V363 DANAH SXC065R	
		SXC	JMPQ70
FUL LGB SLI TOA	ONTN9	PDZ PDZ270R V394 SLI	JMPQ40
SNA	ONTN10	PDZ PDZ270R V363 POXKU V8 SLI	JMPQ40
CRQ NFG NKX OKB	ONTN11	PDZ V186 ROBNN V458 OCN	JM110PQ70
MYF NRS NZY SAN SDM SEE	ONTN12	PDZ V186 HAILE V66 MZB	JM110PQ90
RNM	ONTN13	PDZ V186 ROBNN V208 JLI	JM110PQ70
CMA OXR NTD	ONTN14	PDZ V186 FIM	PQ60
CMA OXR NTD	ONTN15	PDZ V197 POM V264 V186 FIM	JM80
SBA	ONTN16	PDZ V186 DEANO V27 KWANG	PQ60
SBA	ONTN17	PDZ V197 POM V264 V186 DEANO V27	
		KWANG	JM80

PT MUGU AREA

FROM: OXR CMA

TO:	ROUTE ID	ROUTE	ALTITUDE
SBA	VTUN1	KWANG	JMPQ40
BUR	VTUN2	VTU054R TOAKS	JMPQ50
WHP VNY	VTUN3	CMA CMA072R GINNA	JMPQ50
PMD WJF EDW NID VCV IYK L00			
MHV TSP	VTUN4	FIM V386 PMD	JMPQ70
AVX	VTUN5	VTU V208 SXC	JM70PQ50
FUL LGB SLI TOA	VTUN6	VTU044R GINNA V326 VNY V186	
		ADAMM V394 SLI	PQ50
SNA	VTUN7	VTU044R GINNA V326 VNY V186 BAYJY	
		V363 POXKU V8 SLI	PQ50
HHR	VTUN8	VTU V299 SADDE V107 SMO SMO125R	
		POPPR V23 SLI	PQ50
FUL LGB SLI TOA SNA HHR	VTUN9	VTU V208 SXC SLI	JM70
HHR (LAXE)	VTUN10	VTU044R GINNA V326 VNY V186	
		ELMOO	JM70PQ50
LAX	VTUN11	VTU V299 SADDE V107 SMO	JMPQ50
LAX (LAXE)	VTUN12	VTU V25 EXERT	JMPQ50
SMO	VTUN13	VTU044R GINNA V326 VNY V186	
		DARTS	JMPQ50
CCB	VTUN14	VTU044R GINNA V326 VNY V186 V264	
		POM	JM70PQ50

TOWER ENROUTE CONTROL

361

TO:	ROUTE ID	ROUTE	ALTITUDE
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	VTUN15	VTU044R GINNA V326 VNY V186 PDZ ...	PQ50
CNO EMT REI L65 AJO ONT POC RAL RIR			
RIV SBD	VTUN16	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ	JM70
HMT	VTUN17	VTU044R GINNA V326 VNY V186 PDZ V186 WESIN.....	PQ50
HMT	VTUN18	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ V186 WESIN	JM70
L67	VTUN19	VTU044R GINNA V326 VNY V186 PDZ PDZ078R EDITS	PQ50
L67	VTUN20	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ PDZ078R EDITS	JM70
F70	VTUN21	VTU044R GINNA V326 VNY V186 PDZ V186 NIKKL	PQ50
F70	VTUN22	VTU044R GINNA V326 VNY V186 V264 POM V197 PDZ V186 NIKKL	JM70
CRQ NFG NKX OKB	VTUN23	VTU044R GINNA V326 VNY V186 ROBNN V458 OCN.....	PQ70
CRQ NFG NKX OKB (LAXE)	VTUN24	VTU044R GINNA V326 VNY V186 ROBNN V458 OCN.....	PQ70
CRQ NFG NKX OKB	VTUN25	VTU V208 SXC V208 OCN	J110M90
MYF NRS NZY SAN SDM SEE	VTUN26	VTU044R GINNA V326 VNY V186 HAILE V66 MZB.....	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	VTUN27	VTU044R GINNA V326 VNY V186 HAILE V66 MZB	PQ70
MYF NRS NZY SAN SDM SEE	VTUN28	VTU V208 SXC V208 LAX118R CARDI MZB320R MZB	J110M90
RNM.....	VTUN29	VTU044R GINNA V326 VNY V186 ROBNN V208 JLI	PQ70
RNM (LAXE)	VTUN30	VTU044R GINNA V326 VNY V186 ROBNN V208 JLI	PQ70
RNM.....	VTUN31	VTU V208 SXC V208 JLI.....	J110M90
SAN (SANE)	VTUN32	VTU044R GINNA V326 VNY V186 BAYJY V363 DANAH V165 SARGs	PQ50
SAN (SANE)	VTUN33	VTU V208 SXC V27 REDIN V165 SARGs	J110M90
SMX	VTUN34	V25 RZS RZS286R KOAKS	JMPQ80
IZA	VTUN35	V25 RZS RZS277R CALLI	JMPQ60
LPC	VTUN36	V27 GVO	JMPQ60

SAN DIEGO AREA

FROM: CRQ MYF NFG NKX NRS NZY SAN
SDM SEE RNM OKB L18 TIJ

TO:	ROUTE ID	ROUTE	ALTITUDE
AVX	SANN1	MZB V23 OCN V208 SXC	PQ60
AVX	SANN2	MZB293R V27 SXC	J100M80
FUL LGB SNA SLI TOA LAX	SANN3	OCN V23 SLI	PQ60
FUL LGB SNA SLI TOA LAX	SANN4	MZB293R SLI148R SLI	J100M80
LAX (LAXE)	SANN5	OCN V23 SLI V8 TANDY	PQ60
LAX (LAXE)	SANN6	MZB293R SLI148R VTU114R V8 TANDY	J100M80
HHR	SANN7	OCN V23 SLI SLI340R WELLZ HHR RY25 LOC	PQ60
HHR	SANN8	MZB293R SLI148R SLI SLI340R WELLZ HHR RY25 LOC	J100M80
SMO.....	SANN9	OCN V23 POPPR SMO125R SMO SMO059R ELM00	PQ60
SMO.....	SANN10	MZB293R SLI148R SLI V459 DARTS	J100M80
SMO (LAXE)	SANN11	OCN V23 SLI SLI333R V186 DARTS	PQ60
SMO (LAXE)	SANN12	MZB293R SLI148R SLI SLI333R V186 DARTS	J100M80
BUR.....	SANN13	OCN V23 POPPR SMO125R SMO SMO311R SILEX	PQ60
BUR	SANN14	MZB293R SLI148R SLI V23 LAX LAX316R SILEX.....	J100M80
WHP VNY	SANN15	OCN V23 POPPR SMO125R SMO SMO317R CANOG	PQ60

TO:	ROUTE ID	ROUTE	ALTITUDE
WHP VNY	SANN16	MZB293R SLI148R SLI V23 LAX	
		LAX320R CANOG.....	J100M80
BUR VNY WHP (LAXE).....	SANN17	OCN V23 SLI SLI333R V186 VNY	PQ60
BUR VNY WHP (LAXE).....	SANN18	MZB293R SLI148R SLI SLI333R V186	
		VNY	J100M80
CNO AJO L65 REI ONT RAL RIR SBD RIV	SANN19	OCN V23 DANAH V363 POXKU V8 PDZ...	PQ60
ONT SBD	SANN20	V186 TANNR HDF PETIS	JM100
CNO AJO RAL RIR	SANN21	V186 PDZ	JM100
L65 REI RIV	SANN22	V186 TANNR HDF.....	JM100
CCB EMT POC	SANN23	OCN V23 DANAH V363 POM	PQ60
CCB EMT POC	SANN24	MZB293R POM164R POM	J100M80
HMT	SANN25	OCN V23 DANAH V363 POXKU V8 PDZ	
		V186 WESIN	PQ60
HMT	SANN26	V186 WESIN	JM100
L67	SANN27	OCN V23 DANAH V363 POXKU V8 PDZ	
		PDZ078R EDITS.....	PQ60
L67	SANN28	V186 PDZ PDZ078R EDITS.....	JM100
F70	SANN29	OCN V23 DANAH V363 POXKU V8 PDZ	
		V186 NIKKL	PQ60
F70	SANN30	V186 NIKKL	JM100
OXR CMA NTD.....	SANN31	OCN V23 SLI SLI272R SMO125R SMO	
		VNY	PQ60
OXR CMA NTD.....	SANN32	MZB293R V27 SXC V208 VTU	J100M80
CMA OXR NTD (LAXE).....	SANN33	OCN V23 SLI SLI333R V186 FIM.....	PQ60
CMA OXR NTD (LAXE).....	SANN34	MZB293R SLI148R SLI SLI333R V186	
		FIM	J100M80
SBA.....	SANN35	OCN V23 LAX V299 VTU VTU282R	
		KWANG	PQ60
SBA.....	SANN36	MZB293R V27 SXC V208 VTU VTU282R	
		KWANG.....	J100M80
SBA (LAXE).....	SANN37	OCN V23 DANAH V363 BAYJY V186	
		DEANO V27 KWANG.....	PQ60

SANTA BARBARA AREA

FROM: SBA

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR	SBAN1	KWANG CMA CMA078R TOAKS	PQ50
WHP VNY	SBAN2	KWANG CMA CMA072R GINNA	PQ50
BUR VNY	SBAN3	HENER V186 FIM FERNANDO STAR.....	J110M90
AVX	SBAN4	KWANG VTU V208 SXC	JM70PQ50
FUL LGB SLI TOA	SBAN5	KWANG CMA VNY V186 ADAMM V394	
		SLI	PQ50
SNA.....	SBAN6	KWANG CMA VNY V186 BAYJY V363	
		POXKU V8 SLI.....	PQ50
HHR	SBAN7	KWANG VTU V299 SADDE V107 SMO	
		SMO125R POPPR V23 SLI	PQ50
FUL LGB SLI TOA SNA HHR	SBAN8	KWANG VTU V208 SXC SLI	J110M90
HHR (LAXE)	SBAN9	KWANG CMA VNY V186 ELM00	PQ50
LAX	SBAN10	KWANG VTU V299 SADDE V107 SMO	JM110PQ50
LAX (LAXE)	SBAN11	KWANG VTU V25 EXERT	JM70PQ50
SMO	SBAN12	KWANG CMA VNY V186 DARTS	PQ50
SMO	SBAN13	HENER FIM V186 DARTS	J110M90
CCB.....	SBAN14	KWANG CMA VNY V186 V264 POM.....	PQ50
CCB.....	SBAN15	HENER V186 FIM V186 V264 POM	JM70
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN16	KWANG CMA VNY V186 PDZ	PQ50
CNO EMT REI L65 AJO POC ONT RAL RIR			
RIV SBD	SBAN17	HENER FIM V186 V264 POM V197 PDZ .	J110M90
HMT	SBAN18	KWANG CMA VNY V186 PDZ V186	
		WESIN	PQ50
HMT	SBAN19	HENER V186 V264 POM V197 PDZ	
		V186 WESIN.....	J110M90
L67	SBAN20	KWANG CMA VNY V186 PDZ PDZ078R	
		EDITS	PQ50
L67	SBAN21	HENER FIM V186 V264 POM V197 PDZ	
		PDZ078R EDITS.....	J110M90

TOWER ENROUTE CONTROL

363

TO:	ROUTE ID	ROUTE	ALTITUDE
F70	SBAN22	KWANG CMA VNY V186 PDZ V186 NIKKL	PQ50
F70	SBAN23	HENER FIM V186 V264 POM V197 PDZ V186 NIKKL	J110M90
CRQ NFG NKX OKB	SBAN24	HENER V186 DARTS V597 OCN	PQ90
CRQ NFG NKX OKB (LAXE)	SBAN25	KWANG CMA VNY V186 ROBNN V458 OCN	PQ70
CRQ NFG NKX OKB	SBAN26	KWANG VTU V208 SXC V208 OCN	J110M90
MYF NRS NZY SAN SDM SEE	SBAN27	HENER V186 DARTS V597 MZB	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	SBAN28	KWANG CMA VNY V186 HAILE V66 MZB	PQ70
MYF NRS NZY SAN SDM SEE	SBAN29	KWANG VTU V208 SXC V208 LAX118R CARDI MZB320R MZB	J110M90
SAN (SANE)	SBAN30	KWANG CMA VNY V186 BAYJY V363 DANAH V165 SARGs	PQ50
SAN (SANE)	SBAN31	KWANG VTU V208 SXC V27 REDIN V165 SARGs	J110M90
RNM	SBAN32	HENER V186 DARTS V597 OCN V208 JLI	PQ90
RNM (LAXE)	SBAN33	KWANG CMA VNY V186 ROBNN V208 JLI	PQ70
RNM	SBAN34	KWANG VTU V208 JLI	J110M90
OKR CMA NTD	SBAN35	KWANG CMA	JMPQ30
PSP UDD TRM	SBAN36	FIM V186 NIKKL V64 TRM PSP	PQ110

SANTA BARBARA AREA

FROM: SBP SMX VBG LPC IZA

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	SBAN37	RZS V186 FIM	PQ70
BUR VNY	SBAN38	RZS V386 FIM FERNANDO STAR	J110M90
AVX	SBAN39	RZS VTU V208 SXC	JMPQ70
FUL LGB SLI TOA	SBAN40	RZS V186 ADAMM V394 SLI	PQ70
SNA	SBAN41	RZS V186 BAYJY V363 POXKU V8 SLI	PQ70
HHR	SBAN42	RZS VTU V299 SADDE V107 SMO SMO125R POPPR V23 SLI	PQ70
FUL LGB SLI TOA SNA HHR	SBAN43	RZS VTU V208 SXC SLI	J110M90
HHR (LAXE)	SBAN44	RZS V186 ELMOO	PQ70
LAX	SBAN45	RZS VTU SADDE STAR	JM110PQ70
LAX (LAXE)	SBAN46	RZS VTU V25 EXERT	JM70PQ50
SMO	SBAN47	RZS V186 DARTS	PQ70
SMO	SBAN48	RZS V386 FIM V186 DARTS	J110M90
CCB	SBAN49	RZS V186 V264 POM	PQ70
CCB	SBAN50	RZS V386 FIM V186 V264 POM	J110M90
CNO EMT REI L65 AJO POC ONT RAL RIR RIV SBD	SBAN51	RZS V186 PDZ	PQ70
CNO EMT REI L65 AJO POC ONT RAL RIR RIV SBD	SBAN52	RZS V386 FIM V186 V264 POM V197 PDZ	J110M90
HMT	SBAN53	RZS V186 PDZ V186 WESIN	PQ70
HMT	SBAN54	RZS V386 FIM V186 V264 POM V197 PDZ V186 WESIN	J110M90
L67	SBAN55	RZS V186 PDZ PDZ078R EDITS	PQ70
L67	SBAN56	RZS V386 FIM V186 V264 POM V197 PDZ PDZ078R EDITS	J110M90
F70	SBAN57	RZS V186 PDZ V186 NIKKL	PQ70
F70	SBAN58	RZS V386 FIM V186 V264 POM V197 PDZ V186 NIKKL	J110M90
CRQ NFG NKX OKB	SBAN59	RZS V597 OCN	PQ90
CRQ NFG NKX OKB (LAXE)	SBAN60	RZS V186 ROBNN V458 OCN	PQ70
CRQ NFG NKX OKB	SBAN61	RZS VTU V208 SXC V208 OCN	J110M90
MYF NRS NZY SAN SDM SEE	SBAN62	RZS V597 MZB	PQ90
MYF NRS NZY SAN SDM SEE (LAXE)	SBAN63	RZS V186 HAILE V66 MZB	PQ70
MYF NRS NZY SAN SDM SEE	SBAN64	RZS VTU V208 SXC V208 LAX118R CARDI MZB320R MZB	J110M90
SAN (SANE)	SBAN65	RZS V186 VNY V186 BAYJY V363 DANAH V165 SARGs	PQ70
SAN (SANE)	SBAN66	RZS VTU V208 SXC V27 REDIN V165 SARGs	J110M90
RNM	SBAN67	RZS V597 OCN V208 JLI	PQ90

TO:	ROUTE ID	ROUTE	ALTITUDE
RNM (LAXE)	SBAN68	RZS V186 ROBNN V208 JLI	PQ70
RNM	SBAN69	RZS VTU V208 JLI	J110M90
OXR CMA NTD	SBAN70	RZS VTU	JMPQ70
PSP UDD TRM	SBAN71	RZS V386 FIM V186 NIKKL V64 TRM	
		PSP	PQ110

PALM SPRINGS AREA

FROM: PSP UDD TRM

TO:	ROUTE ID	ROUTE	ALTITUDE
BUR VNY WHP	PSPN1	V388 PDZ V186 VNY	PQ100
BUR VNY WHP	PSPN2	V388 PDZ V197 POM V264 V186 VNY...	JM120
AJO CNO RAL RIR ONT RIV SBD	PSPN3	V388 PDZ	JM120PQ100
HMT	PSPN4	V388 PDZ V186 WESIN	JM120PQ100
EMT POC CCB	PSPN5	V388 PDZ PDZ270R V363 POM	JM120PQ100
L67	PSPN6	V388 PDZ PDZ078R EDITS	JM120PQ100
F70	PSPN7	V388 PDZ V186 NIKKL	JM120PQ100
FUL LGB SLI TOA SNA	PSPN8	V388 ACINS V283 SLI	JM120PQ100
HHR	PSPN9	V388 PDZ PDZ270R HHR RY25 LOC	JM120PQ100
LAX	PSPN10A	V388 PDZ V16 LAHAB	M120PQ100
LAX	PSPN10B	V388 LENHO SEAVU SEAVU ARRIVAL	J120
LAX (LAXE)	PSPN11	V388 PDZ PDZ270R V394 SLI V8	
		TANDY	PQ100
LAX (LAXE)	PSPN12	V388 ACINS V283 SLI V8 TANDY	JM120
SMO	PSPN13	V388 PDZ V186 DARTS	JM120PQ100
CMA OXR NTD	PSPN14	V388 PDZ V186 FIM	PQ100
CMA OXR NTD	PSPN15	V388 PDZ V197 POM V264 V186 FIM....	JM120
SBA	PSPN16	V388 PDZ V186 DEANO V27 KWANG	PQ100
SBA	PSPN17	V388 PDZ V197 POM V264 V186	
		DEANO V27 KWANG	M120

PALMDALE AREA

FROM: EDW L00 MHV PMD WJF

TO:	ROUTE ID	ROUTE	ALTITUDE
HHR	EDWN1	PMD V518 KIMMO V459 DARTS V186	
		ADAMM V394 HHR RY25 LOC	JMPQ80
FUL LGB SLI SNA TOA	EDWN2	PMD V201 BERRI V459 SLI	JMPQ90
FUL LGB SLI SNA TOA (LAXE)	EDWN3	PMD V386 V23 LAX V25 ALBAS SLI	MPQ80

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by **pitch** (entry into) and **catch** (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures, preferred IFR routing, or other established routing programs.

The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City (ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU). Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes only.

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted.

Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.

Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: <http://sua.faa.gov/sua/Welcome.do>. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as preferred IFR routes.

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports Located Outside HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing over any of the following pitch points (listed from north to south):

DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD, MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic.

HAR Special High Altitude Pitch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists pitch points for airports within the HAR Phase I expansion airspace.

Albuquerque	ABQ, GUP, HANOS or ZUN
Austin	ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV
Boca Raton, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Burbank includes Santa Monica and Van Nuys	GMN, MARKS or DAG LAS or HEC EED or PMD BLH
Chicago Terminal Area	IOW, PLL275065, MZV or BAE
Dallas/Fort Worth Terminal Area	ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK ELD, SWB or Aircraft destined the Chicago terminal area Except MDW EAKER MIDEE BDF BRADFORD-STAR or MLC J105 SGF BDF BRADFORD-STAR
Denver Terminal Area	PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE, CABET, WEEDS, OR BINKE
Fort Lauderdale (or) Fort Lauderdale Executive	THNDR KPASA Q118 LENIE or THNDR KPASA Q116 CEEYA or THNDR KPASA Q110 FEONA or THNDR SMELZ Q106 GADAY or THNDR SMELZ Q106 BULZI
Houston Bush	LIT, EMG, MLC, JCT or Aircraft destined Atlanta Terminal Area LCH Q24 PAYTN HONIE-RNAV STAR or Aircraft joining J37 to the northeast, BPT GUSTI Q22 CATLN or Aircraft joining J42 to the northeast, ELD Q32 J42

Houston Hobby	LIT, EMG, MLC, JCT, or Aircraft joining J42 to the northeast, ELD Q32 J42
Jacksonville, FL	TAY
Kansas City Terminal Area	TIFTO, CATTS or KENTN
Los Angeles, includes Ontario	GMN, RZS or DAG LAS or TRM EED or TRM PKE
Las Vegas	DOBNE, MOSBI, NICLE, TRALR or ZELOT
Long Beach includes Orange County	GMN SNS, EHF, LANDO or TRM PKE or TRM EED
Memphis	BNA, HAAWK, SALMS or SQS
Miami Terminal Area	WINCO KPASA Q118 LENIE or WINCO KPASA Q116 CEEYA or WINCO KPASA Q110 FEONA or WINCO SMELZ Q106 GADAY or WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE

Salt Lake City	HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI or TCH J56 CHE or TCH J173 EKR
Saint Louis	VIH, MAP, MYERZ, MCM or HLV MCI
San Antonio Terminal Area	FUZ, SJT, MQP, ABI or Aircraft North of LFK, LFK or Aircraft South of HUB, ELA or Aircraft South of LFK and North of HUB LCH
San Diego	TRM EED or TRM PKE or TRM JOTNU BLD
San Francisco Bay Area	GALLI, INSLO, HAROL JSICA
Oakland	GALLI, INSLO, HAROL JSICA
San Jose	GALLI or INSLO
Seattle	BLUIT
Southwest Florida Airports (RSW/FMY)	JOCKS KPASA Q118 LENIE or JOCKS KPASA Q116 CEEYA or JOCKS KPASA Q110 FEONA or JOCKS SMELZ Q106 GADAY or JOCKS SMELZ Q106 BULZI
Tampa Terminal Area	FEONA, BULZI or BRUTS Q118 LENIE or GULFR Q116 CEEYA or BULZI Q106 GADAY

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Atlanta Terminal Area	Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA or Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVAC or MEM or Aircraft through ZME airspace from ZID airspace west of a line from VHP to BWG, BNA or Aircraft through ZME airspace from ZID airspace east of a line from VHP to BWG, BWG or Aircraft through ZME airspace from ZFW airspace, MEM or MEI HONIE (RNAV)–STAR or PATYN HONIE (RNAV)–STAR
-----------------------	---

Baltimore–Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL
Hartford Bradley*	GEP, CRL
Canton–Akron*	GIJ, VHP, GEP
Charlotte	BNA, VUZ
Cincinnati Terminal Area	BNA, PXV or Aircraft north of SLC, JOT or Aircraft over or south of SLC, ENL or SLC or SFO departures, ENL, JOT
Cleveland Terminal Area*	OBK
Detroit Terminal Area	BAE MKG POLAR–STAR or VHP FWA MIZAR–STAR
Detroit Young	VHP FWA or LAN SPRTN–STAR
Indianapolis Terminal Area	BIB, SPI, JOT
Louisville	ENL, MEM
Newark*	GEP, VHP, FLM, IIU, BNA, VUZ or IOW GIJ J554 CRL J584 SLT FQM
New York Kennedy*	GEP, VHP, FLM, IIU, BNA, VUZ or DBQ J94 PMM J70 LVZ LENDY–STAR
New York LaGuardia*	GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ
Philadelphia Terminal Area*	GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ
Pittsburgh Terminal Area*	VHP, GIJ, BAE, GEP
Pontiac	LFD, LAN, VHP, FWA, GEP
Providence	JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ
Raleigh–Durham	FLM, IIU, BNA, VUZ
Toronto Terminal Area	ECK, SVM, SSM, GEP
Teterboro*	GEP, VHP, CRL, BNA, VUZ
Washington Dulles/National*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ
White Plains*	GEP, VHP, CRL, FLM, IIU, BNA, VUZ
Willow Run*	LAN, LFD, VHP, FWA, GEP

*Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522, Q505, Q504, Q502, Q501

or

Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP

or

Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.

Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area	CURLY CURLY-STAR or ESPAN FRIHO-STAR or LAVAN LAVAN-STAR or FTI FRIHO-STAR or MIERA MIERA-STAR
Austin Terminal Area	Aircraft west of a north-south line at LFK, BLEWE or Aircraft east of a north-south line at LFK, IDU or LLO
Boca Raton, FL	CEW DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or SZW INPIN SHDAY (RNAV)-STAR
Chicago Midway	CVA MOTIF-STAR or PIA MOTIF-STAR or DBQ CVA MOTIF-STAR or LMN MOTIF-STAR
Chicago O'Hare Terminal Area	GEP DLL MSN JVL JANESVILLE-STAR or TVC PULLMAN-STAR or FOD DBQ JVL JANESVILLE-STAR or MCW JANESVILLE-STAR or GCK IRK BRADFORD-STAR
Dallas/Fort Worth Terminal Area	IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR Aircraft through ZME airspace from north and west of PXV, RZC, Q23 FSM or Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW or Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS or Aircraft through ZME airspace from J52 and south of J52, SQS

Denver Terminal Area	OATHE DANDD-STAR
	or
	HGO QUAIL-STAR
	or
	LOPEC-STAR
	or
	ALS LARKS-STAR
	or
	HBU POWDR-STAR
	or
	EKR TOMSN-STAR
	or
	CHE TOMSN-STAR
	or
	BFF LANDR-STAR
	or
	LBF SAYGE-STAR
	or
	HCT SAYGE-STAR
	or
	RSK LARKS-STAR
	or
	LAA QUAIL-STAR
	or
	GCK J154 RYLIE DANDD-STAR
	or
	OCS J154 ALPOE RAMMS-STAR
	or
	YANKI J114 SNY LANDR-STAR
	or
	Aircraft filed BIL or east, MBW RAMMS-STAR
	CEW DEFUN Q104 PIE SWAGS (RNAV)-STAR
Ft Lauderdale or Ft Lauderdale Executive	Aircraft through ZHU airspace remain south ZME and ZTL airspace
	or
Houston Bush	SZW HEVVN Q104 PIE SWAGS (RNAV)-STAR
	CRP, CVE, LLO, LUKIY, SAT
	or
	Aircraft south and east of LLA, LLA
	or
	MISLE Q40 AEX
	or
	Aircraft north and east of SJI, SJI
	or
	Aircraft east of PXV, PXV Q31 DHART SWB
Houston Hobby	or
	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	CRP, ELLVR, SAT, SWB
	or
	Aircraft south and east of GIRLY, GIRLY
	or
	Aircraft north and east of SJI, SJI
	or
	BESOM Q38 ROKIT ROKIT-STAR
	or
Jacksonville	Aircraft east of PXV, PXV Q29 HARES SWB
	or
	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	GADAY ZOOSS TAY
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	ZOOSS TAY

John Wayne–Orange County	HEC, PGS, BLD or Aircraft south of TBC from ZAB airspace, HIPPI
Kansas City Terminal Area	LMN BRAYMER–STAR or PWE ROBINSON–STAR or EMP JHAWK–STAR
Las Vegas	DILCO, LIDAT, IGM or Aircraft over PGA or north of PGA KSINO or Aircraft south of PGA, PGS, LYSY
Los Angeles Terminal Area	Aircraft North of TBC, HEC, PGS or Aircraft South of TBC from ZAB airspace, HIPPI, MESSI
Miami Terminal Area	CEW DEFUN Q104 CYY DEEDS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace or SZW HEVVN Q104 CYY DEEDS (RNAV)–STAR
Minneapolis Terminal Area	Aircraft from north, west, south, FAR GOPHER–STAR or RWF SKETR–STAR or ALO KASPR–STAR or BRD GOPHER–STAR or BAE EAU CLAIRE–STAR or FOD TWOLF–STAR
Memphis Terminal Area	ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD
Naples, FL	CEW DEFUN Q104 PLYER PIKKR (RNAV)–STAR Aircraft through ZHU AIRSPACE remain south of ZME and ZTL airspace or SZW HEVVN Q104 PLYER PIKKR (RNAV)–STAR
Nashville	CCT, GHM, GUITR, TINGS, VOLLs
New Orleans Terminal Area	BLUEZ, GPT, LCH, MCB, TBD, FATSO
Oakland	ILA or KATTS PAMMY or Aircraft over or south of a line ILC J16 DVC REANA KATTS PAMMY or Aircraft from north of ILC, JOPER PAMMY or KATTS PAMMY or Aircraft over or south of ILC, REANA KATTS PAMMY
Orlando Terminal Area	GADAY Q108 CLAWZ LEESE–STAR Aircraft through ZHU airspace remain south of ZME/ZTL airspace or OTK LEESE–STAR

Palm Beach, FL	CEW DEFUN Q112 INPIN GULLO (RNAV)–STAR Aircraft through ZHU airspace remain south of ZME and ZTL airspace or SZW INPIN GULLO (RNAV)–STAR
Phoenix	CORKR DRK or Aircraft from ZDV airspace, GUP or Aircraft from ZAB airspace, ZUN, MOHAK, SSO or VYLLA TUS
Phoenix Satellites	FLG, SSO, MOHAK or VYLLA, TUS
Portland, OR Terminal Area	ARNIT BONVL–STAR or LARNO BONVL–STAR or MOXEE MOXEE–STAR
St. Louis Terminal Area	SGF TRAKE–STAR or BUM TRAKE–STAR or ANX TRAKE–STAR or LMN IRK RIVRS–STAR or RBS VANDALIA–STAR
Salt Lake City Terminal Area	JNC J12 HELPR SPANE–STAR or EKR MTU SPANE–STAR or BCE DTA–TCH or MLF DTA–TCH or BVL BONNEVILLE–STAR or BYI BEARR–STAR or PIH BEARR–STAR or DBS BRIGHAM CITY–STAR or JAC BRIGHAM CITY–STAR or BPI BRIGHAM CITY–STAR or OCS BRIGHAM CITY–STAR
San Diego Terminal Area	EED, LAX, GBN
Santa Ana	HEC, PGS, BLD, HIPPI
San Antonio Terminal Area	IDU, CSI, JCT, LLO, CRP, LRD or West of a north–south line at LFK, BLEWE or East of a north–south line at LFK, IDU

San Francisco	FMG GOLDEN GATE--STAR
	or
	MVA MODESTO--STAR
	or
	ENI GOLDEN GATE--STAR
	or
San Jose	OAL MODESTO--STAR
	or
	South of a line ILC to DVC, REANA KATTS OAL MODESTO--STAR
	FMG HYP EL NIDO--STAR
	or
	OAL HYP EL NIDO--STAR
Seattle Terminal Area	or
	ENI GOLDEN GATE--STAR
	or
	South of a line ILC to DVC, REANA KATTS KICHI CANDA EL NIDO--STAR
	Aircraft from northeast, southeast, south, TEMPL GLASR--STAR
	or
Southwest Florida Airports RSW and FMY	SUNED CHINS--STAR
	or
	BTG OLMYPIA--STAR
	CEW DEFUN Q104 SWABE JOSFF--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
Tampa Terminal Area	SZW HEVVN Q104 SWABE JOSFF--STAR
	CEW DEFUN Q104 HEVVN DARBS--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW DARBS--STAR
	DRK PXR
Tucson	or
	MOHAK GBN

VISUAL FLIGHT RULES (VFR) WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag. The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database.

BALTIMORE–WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPAXI	_____	N38°34.57' /W076°20.38'
VPONX	_____	N39°06.65' /W076°55.92'
VPOOP	_____	N38°56.32' /W076°36.90'

BOSTON HELICOPTER CHART

VPBAY	_____	N42°16.17' /W070°49.48'
VPBLT	_____	N42°19.67' /W070°53.40'
VPCGS	_____	N42°22.08' /W071°03.13'
VPEVS	_____	N42°23.52' /W071°04.10'
VPFEN	_____	N42°12.58' /W071°08.88'
VPFRE	_____	N42°25.03' /W071°12.32'
VPGLV	_____	N42°21.88' /W070°52.18'
VPHAM	_____	N42°30.13' /W071°07.15'
VPPIK	_____	N42°20.37' /W071°15.93'
VPQUA	_____	N42°12.10' /W071°04.78'
VPQUB	_____	N42°12.60' /W070°59.83'
VPSPF	_____	N42°24.20' /W071°09.47'
VPTOB	_____	N42°31.42' /W070°59.82'
VPWAN	_____	N42°36.88' /W071°19.45'

BOSTON TERMINAL AREA CHART

VPCHH	Cohasset	N42°13.58' /W070°48.94'
VPCUT	Cuttyhunk Harbor	N41°25.50' /W070°55.03'
VPFRA	Framingham Shopping Center	N42°18.16' /W071°23.65'
VPHOL	Woods Hole	N41°31.06' /W070°40.60'
VPHUL	Hull	N42°18.20' /W070°55.30'
VPLPT	Nantucket Great Point	N41°23.41' /W070°02.78'
VPNED	Needham Towers	N42°18.51' /W071°14.64'
VPPEA	Peabody Shopping Center	N42°32.52' /W070°56.69'
VPROC	Rockingham Race Track	N42°46.29' /W071°13.57'
VPSCI	Scituate	N42°11.89' /W070°43.69'
VPTPT	Nantucket Third Point	N41°18.51' /W070°03.37'
VPTUC	Tuckernuck	N41°18.31' /W070°15.43'
VPWAK	Wakefield	N42°30.72' /W071°05.24'
VPWAN	Wang Towers	N42°36.88' /W071°19.45'

CHARLOTTE SECTIONAL CHART

VPATO	_____	N34°37.37' /W076°31.47'
VPAVA	_____	N34°57.00' /W077°16.50'
VPBFE	_____	N32°16.38' /W080°47.50'
VPBRA	_____	N36°13.75' /W076°08.08'
VPGCE	_____	N36°03.90' /W076°36.42'
VPGHI	_____	N35°15.30' /W075°31.25'
VPGIO	_____	N35°32.50' /W076°37.33'
VPKJU	_____	N35°26.58' /W076°10.22'
VPLMN	_____	N34°55.43' /W077°46.42'
VPMAB	_____	N34°42.20' /W077°03.50'
VPNPO	ISLE OF PALMS	N32°47.78' /W079°46.45'
VPOKY	_____	N35°06.53' /W075°59.17'
VPREP	_____	N32°33.98' /W080°21.82'
VPRRS	_____	N33°25.45' /W079°07.60'
VPUMO	_____	N35°35.63' /W075°28.08'
VPWZO	_____	N36°00.87' /W075°40.07'
VPZIE	_____	N32°01.62' /W080°53.42'

CHICAGO SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCOH	_____	N31°49.35'/W081°51.07'

DENVER TERMINAL AREA CHART/FLYWAY CHART

VPBEN	_____	N39°44.28'/W104°26.00'
VPFTG	_____	N39°44.35'/W104°32.75'
VPNIC	NORTH INTERCHANGE	N39°58.90'/W104°59.27'

HOUSTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPBWY	_____	N29°46.25'/W095°09.24'
VPDTN	_____	N29°46.59'/W095°22.01'
VPGLA	_____	N30°08.32'/W095°06.62'
VPGLB	_____	N30°07.80'/W094°55.70'
VPKTY	_____	N29°47.05'/W095°44.92'
VPPLN	_____	N30°08.80'/W095°50.42'
VPRSN	_____	N29°30.00'/W095°41.00'
VPSND	_____	N29°23.13'/W095°28.86'
VPSNT	_____	N29°49.29'/W094°53.94'
VPTNE	_____	N29°47.48'/W095°03.34'
VPTNW	_____	N29°47.06'/W095°33.81'
VPTRK	_____	N29°24.06'/W095°10.44'

JACKSONVILLE SECTIONAL CHART

VPAFI	_____	N31°49.35'/W081°51.07'
VPAFY	_____	N30°07.00'/W081°21.33'
VPBEC	_____	N29°46.25'/W081°15.10'
VPCJA	_____	N29°30.00'/W081°06.00'
VPCKY	_____	N28°46.50'/W082°34.00'
VPCNY	_____	N28°30.00'/W080°45.00'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDAR	_____	N31°22.38'/W081°24.13'
VPDFI	_____	N29°00.17'/W081°20.85'
VPDUT	_____	N27°37.70'/W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEGV	_____	N29°39.97'/W081°24.87'
VPFFU	_____	N28°57.08'/W081°00.33'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHAA	_____	N30°04.02'/W083°40.02'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIWA	MIDWAY	N31°48.33'/W081°25.85'
VPJMY	_____	N29°26.92'/W081°18.27'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPLEV	_____	N28°48.00'/W080°52.00'
VPLJA	_____	N29°00.00'/W080°51.00'
VPMAI	_____	N30°50.02'/W084°56.63'
VPTLH	_____	N30°32.70'/W083°52.22'
VPXZY	_____	N29°35.00'/W083°10.00'
VPYIW	_____	N30°42.28'/W081°27.25'
VPZIE	_____	N32°01.62'/W080°53.42'

KANSAS CITY SECTIONAL CHART

VPAGO	_____	N37°50.33'/W090°29.03'
VPBEK	_____	N37°15.07'/W092°30.67'
VPDEN	_____	N37°46.75'/W092°19.20'
VPENE	_____	N37°44.75'/W091°55.78'
VPES	_____	N36°59.48'/W091°00.88'
VPFME	_____	N37°41.00'/W092°38.33'
VPGXY	_____	N37°15.50'/W091°40.17'
VPMBE	_____	N37°11.08'/W090°27.92'
VPMKE	_____	N37°24.47'/W092°40.00'
VPROV	_____	N38°01.72'/W091°12.81'
VPUTT	_____	N37°52.05'/W092°01.20'

VFR WAYPOINTS

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPWOC	_____	N37°18.03' / W092°18.63'
VPWRO	_____	N37°39.12' / W091°45.68'
VPXIZ	_____	N37°26.60' / W092°05.42'

KANSAS CITY TERMINAL AREA CHART

VPATN	ATCHISON	N39°33.62' /W095°07.65'
VPBGS	BLUE SPRINGS	N39°01.82' /W094°16.32'
VPBSP	BONNER SPRINGS	N39°03.78' /W094°53.10'
VPCHB	CHOUTEAU BRIDGE	N39°08.77' /W094°32.03'
VPDSO	DE SOTO	N38°58.68' /W094°58.48'
VPESG	EXCELSIOR SPRINGS	N39°20.68' /W094°13.77'
VPGTB	GARRETSBURG	N39°40.92' /W094°41.45'
VPLAT	LATHROP WATER TANK	N39°32.87' /W094°20.00'
VPLEN	LENEXA	N38°57.77' /W094°43.68'
VLVL	LONGVIEW LAKE	N38°54.63' /W094°28.28'
VMCL	MC LOUTH	N39°11.65' /W095°12.50'
VPNHA	NASHUA	N39°17.83' /W094°34.80'
VPSCX	SPORTS COMPLEX	N39°03.00' /W094°29.02'
VPSKR	SUGAR CREEK REFINERY	N39°07.00' /W094°27.02'
VSPPK	SWOPE PARK	N39°00.47' /W094°31.93'
VP TSK	TWIN STACKS	N39°09.05' /W094°38.22'
VPWOF	WORLDS OF FUN	N39°10.42' /W094°29.12'

KLAMATH FALLS SECTION CHART

VPORO _____ N43°57.38' /W123°02.22'

LOS ANGELES HELICOPTER CHART

VPANA		N33°44.43' /W117°50.03'
VPART	MAGNOLIA	N33°51.45' /W117°58.92'
VPAUT	HWY 91 & 55	N33°50.63' /W117°49.57'
VPBOB		N33°59.60' /W117°21.45'
VPCAR		N33°49.90' /W118°17.23'
VPCNG	CONEJO GRADE US HWY 101	N34°12.54' /W118°59.61'
VPCOR		N33°52.90' /W117°32.95'
VPCRX		N34°01.40' /W117°44.88'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76' /W119°02.53'
VPDOW		N33°56.47' /W118°05.80'
VPELA		N34°00.98' /W118°10.35'
VPETY		N33°38.70' /W117°44.12'
VPFCB		N34°02.03' /W118°01.63'
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71' /W119°10.39'
VPGOL		N34°09.33' /W118°17.37'
VPIMP		N33°55.85' /W118°16.85'
VPKAT		N33°48.23' /W117°54.22'
VPKEL		N34°03.92' /W117°48.40'
VLPLAC		N34°03.75' /W118°14.93'
VLLLU		N34°03.85' /W117°17.82'
VPLQM	QUEEN MARY	N33°45.17' /W118°11.37'
VPLRT	SANTA ANITA RACE TRACK	N34°08.45' /W118°02.65'
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97' /W118°16.32'
VPMDR		N33°59.27' /W118°23.97'
VPNEW	NEWHALL PASS	N34°20.18' /W118°30.72'
VPNUY		N34°09.63' /W118°28.18'
VPPOCH		N33°28.07' /W117°40.32'
VPPOK		N34°03.32' /W118°12.83'
VPPOR		N34°00.10' /W117°50.12'
VPRRT		N33°59.37' /W118°16.83'
VPSEP		N34°05.80' /W118°28.63'
VPSFR		N34°17.45' /W118°28.07'
VPSTC	SATICOY BRIDGE	N34°16.62' /W119°08.34'
VPSTK		N34°13.97' /W118°24.66'

LOS ANGELES SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71'/W119°10.39'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART

VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPGETY	GETTY CENTER	N34°04.84'/W118°28.66'
VPLBP	BANNING PASS	N33°56.05'/W116°59.63'
VPLCC	CHAFFEY COLLEGE	N34°08.87'/W117°34.33'
VPLCP	CAJON PASS	N34°18.07'/W117°27.68'
VPLDL	DISNEYLAND	N33°48.72'/W117°55.13'
VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLDS	DODGER STADIUM	N34°04.42'/W118°14.42'
VPLFX	91/605 INTERCHANGE	N33°52.38'/W118°06.08'
VPLGP	GRIFFITH PARK OBSERVATORY	N34°07.10'/W118°18.02'
VPLHF	110/405 FWYS	N33°51.42'/W118°17.10'
VPLHP	HUNTINGTON PIER	N33°39.32'/W118°00.25'
VPLKH	KING HARBOR	N33°50.75'/W118°23.88'
VPLLC	L.A. COLISEUM	N34°00.83'/W118°17.27'
VPLLM	LAKE MATHEWS	N33°50.58'/W117°26.85'
VPLMM	MAGIC MOUNTAIN	N34°26.20'/W118°36.28'
VPLMS	MILE SQUARE PARK	N33°43.40'/W117°56.77'
VPLPD	PRADO DAM	N33°53.40'/W117°38.48'
VPLPP	PACIFIC PALISADES	N34°02.13'/W118°32.15'
VPLQM	QUEEN MARY	N33°45.17'/W118°11.37'
VPLRB	ROSE BOWL	N34°09.67'/W118°10.05'
VPLRT	SANTA ANITA RACE TRACK	N34°08.45'/W118°02.65'
VPLSA	SANTA ANA CANYON	N33°52.03'/W117°42.68'
VPLSB	SANTA FE FLOOD BASIN	N34°07.72'/W117°57.30'
VPLSC	STATE COLLEGE	N33°52.97'/W117°53.13'
VPLSF	SAN FERNANDO RESERVOIR	N34°17.87'/W118°29.00'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPLSR	HAWTHORNE & 405 FREEWAY	N33°53.07'/W118°21.13'
VPLSS	SANTA SUSANA PASS	N34°16.00'/W118°38.43'
VPLTW	TUJUNGA WASH & FOOTHILL	N34°16.40'/W118°20.30'
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97'/W118°16.32'
VPLWT	WATER TANK	N34°10.82'/W118°46.27'
VPNEW	NEWHALL PASS	N34°20.18'/W118°30.72'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

MIAMI SECTIONAL CHART

VPACH	HOLLYWOOD BEACH	N26°00.92'/W080°06.93'
VPBOV	_____	N27°57.00'/W080°46.75'
VPCLC	_____	N26°27.07'/W082°00.88'
VPCTE	_____	N26°09.28'/W081°20.70'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDUT	_____	N27°37.70'/W082°09.10'
VPDZE	_____	N27°19.00'/W080°44.17'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78'/W080°28.00'
VPFAH	_____	N26°25.40'/W081°29.67'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHRO	_____	N27°05.97'/W082°12.20'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIBR	_____	N27°12.47'/W081°40.22'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPKOE	_____	N24°40.08'/W081°20.55'
VPLYV	_____	N24°49.07'/W080°49.17'
VPMB0	GULFSTREAM PARK	N25°58.57'/W080°08.17'
VPOBA	PUMPING STATION	N26°28.30'/W080°26.75'
VP RBI	_____	N25°50.67'/W080°55.18'
VP RNL	RANGER STATION	N25°22.92'/W080°36.58'
VPWMO	_____	N27°03.00'/W080°35.00'

MIAMI TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPACH	HOLLYWOOD BEACH	N26°00.92' /W080°06.93'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78' /W080°28.00'
VPMBO	GULFSTREAM PARK	N25°58.57' /W080°08.17'
VPOBA	PUMPING STATION	N26°28.30' /W080°26.75'
VPRBI		N25°50.67' /W080°55.18'
VPRNL	RANGER STATION	N25°22.92' /W080°36.58'

NEW ORLEANS SECTIONAL CHART

VPGPT		N30°25.95' /W089°05.62'
VPLIP	PHILLIPS INLET	N30°16.23' /W085°59.25'
VPMAI		N30°50.02' /W084°56.63'
VPMOB		N30°23.00' /W088°31.72'
VPRAM		N30°18.95' /W089°35.88'
VPRER		N30°13.87' /W085°20.67'
VPRIV		N30°54.85' /W087°57.82'
VPSAW		N30°49.65' /W089°07.42'
VPTHR		N30°19.93' /W087°08.50'

NEW YORK HELICOPTER CHART

VPJAY		N40°59.00' /W073°07.00'
VPLYD		N40°57.37' /W073°29.59'
VPROK		N40°52.70' /W073°44.24'

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

VPALL	ALLENVILLE	N33°20.97' /W112°35.20'
VPAQU	AQUEDUCT PUMPING STATION	N33°40.05' /W112°41.38'
VPARM	ARROWHEAD MALL	N33°38.52' /W112°13.48'
VPAWG	AHWATUKEE GOLF COURSE	N33°19.98' /W111°59.08'
VPAZM	ARIZONA MILLS	N33°23.43' /W111°57.88'
VPBAR	BARTLETT DAM	N33°49.10' /W111°37.92'
VPCCC	COUNTRY CLUB & CANAL	N33°30.73' /W111°50.37'
VPCNL	CANAL	N33°33.23' /W111°46.89'
VPFRB	FIREBIRD LAKE	N33°16.35' /W111°58.10'
VPFTN	FOUNTAIN HILLS	N33°36.12' /W111°42.72'
VPGLX	GILA CROSSING	N33°16.55' /W112°10.08'
VPGPP	GLENDALE POWER PLANT	N33°33.27' /W112°13.00'
VPMAR	MARICOPA	N33°03.42' /W112°02.88'
VPMHS	MESQUITE HIGH SCHOOL	N33°20.53' /W111°49.58'
VPNRV	NEW RIVER	N33°55.08' /W112°08.45'
VPNTT	NORTH TEST TRACK	N33°03.50' /W111°55.83'
VPPIR	PIR	N33°22.52' /W112°18.90'
VPQTR	QUINTERO GOLF COURSE	N33°49.53' /W112°23.58'
VPRVC	RIO VERDE COMMUNITY	N33°44.37' /W111°39.62'
VPSMC	SOUTH MOUNTAIN COLLEGE	N33°23.02' /W112°02.12'
VPSQP	SQUAW PEAK	N33°32.83' /W112°01.27'
VPSSS	SUPERSTITION SPRINGS MALL	N33°23.50' /W111°41.37'
VPSTN	SANTAN MOUNTAINS	N33°09.23' /W111°40.92'
VPSTT	SOUTH TEST TRACK	N32°56.25' /W111°59.67'
VPZZZ		N33°20.18' /W111°26.53'

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

VPAGN	TV ANTENNA	N38°32.08' /W090°22.42'
VPBPE		N38°23.80' /W090°20.38'
VPCJY	HOLIDAY SHORES	N38°55.00' /W089°56.00'
VPCOJ	WINFIELD DAM	N39°00.28' /W090°41.23'
VPDFA	JEFFERSON BARRACKS BRIDGE	N38°29.18' /W090°16.47'
VPEAZ	BUSCH STADIUM	N38°37.43' /W090°11.55'
VPEDJ	WATER TANKS	N38°45.30' /W090°34.87'
VPEGR	GAS TANKS	N38°35.80' /W090°19.32'
VPEOX	ST PETERS	N38°47.17' /W090°39.25'

WAYPOINT IDENT

VPFAI
VPFFY
VPGPF
VPGVI
VPHRQ
VPIBO
VPJMU
VPKNY
VPLES
VPLIW
VPLXU
VPNSY
VPNZY
VPAZ
VPRMO
VPWKO
VPXXI
VPYID

COLLOCATED VFR CHECKPOINT

HOWELL ISLAND

CHAIN OF ROCKS BRIDGE
WATERLOO
HORSESHOE LAKE
PACIFIC
ST CHARLES
SIX FLAGS
GATEWAY ARCH
WOOD RIVER REFINERIES
WENTZVILLE
JERSEYVILLE
FOREST PARK
COLUMBIA
MILLSTADT
MOSENTHEIN ISLAND

LOCATION

N38°40.00'/W090°43.00'
N38°55.37'/W090°17.30'
N38°35.60'/W090°26.92'
N38°32.30'/W090°27.80'
N38°45.88'/W090°10.42'
N38°20.00'/W090°09.00'
N38°41.00'/W090°05.00'
N38°29.00'/W090°44.00'
N38°47.00'/W090°30.00'
N38°30.67'/W090°40.47'
N38°37.50'/W090°11.00'
N38°50.00'/W090°05.00'
N38°48.83'/W090°50.98'
N39°07.00'/W090°20.00'
N38°38.00'/W090°17.00'
N38°27.00'/W090°12.00'
N38°27.50'/W090°05.68'
N38°43.00'/W090°12.25'

SALT LAKE CITY HELICOPTER CHART

VPAIR
VPBEE
VPBRN
VPCAP
VPCHS
VPCOP
VPCWY
VPCYN
VPFPC
VPFPK
VPGFS
VPHVE
VPJRT
VPKSL
VPLGN
VPMMDH
VPMMT
VPMST
VPNSL
VPNTPT
VPOGE
VPOPS
VPPEN
VPPPT
VPPTM
VPPVO
VPRWY
VPSLC
VPTIP
VPWBR
VPWBT

SALTAIR
SOUTH INTERCHANGE
BARN
STATE CAPITOL

BINGHAM COPPER MINE
CAUSEWAY
PARLEYS CANYON
FREE PORT CENTER
FRANCIS PEAK
GARFIELD STACK
SPAGHETTI BOWL
JORDAN RIVER TEMPLE
KSL ANTENNA
LAGOON AMUSEMENT PARK
MCKAY DEE HOSPITAL
MICROWAVE TOWERS

GRAIN ELEVATOR
POWER STATION
STATE PRISON
PROMONTORY POINT
POINT OF THE MOUNTAIN
PROVO CANYON

I-15/I-80 INTERCHANGE
SOUTH TIP
WEBER CANYON

N40°44.85'/W112°11.22'
N40°38.18'/W111°54.23'
N40°54.28'/W112°10.15'
N40°46.67'/W111°53.25'
N40°42.28'/W112°05.92'
N40°31.38'/W112°09.00'
N41°05.37'/W112°07.17'
N40°42.67'/W111°48.10'
N41°05.92'/W112°02.27'
N41°01.98'/W111°50.30'
N40°43.28'/W112°11.88'
N40°43.50'/W111°54.22'
N40°35.02'/W111°55.58'
N40°46.80'/W112°05.80'
N40°59.08'/W111°53.57'
N41°11.50'/W111°57.08'
N40°48.50'/W111°53.37'
N41°01.67'/W112°02.47'
N40°50.15'/W111°54.90'
N41°03.57'/W112°14.23'
N41°13.13'/W112°00.45'
N41°20.38'/W112°02.78'
N40°29.88'/W111°53.62'
N41°12.28'/W112°25.73'
N40°27.42'/W111°54.83'
N40°18.77'/W111°39.45'
N40°48.48'/W112°00.33'
N40°45.83'/W111°54.85'
N40°50.93'/W112°10.92'
N41°08.17'/W111°54.83'
N40°38.00'/W112°03.33'

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART

VPAIR
VPBEE
VPBRN
VPCAP
VPCHS
VPCOP
VPCVI
VPCWY
VPCYN
VPFPC
VPFPK
VPGFS

SALTAIR
SOUTH INTERCHANGE
BARN
STATE CAPITOL

BINGHAM COPPER MINE
CENTERVILLE INTERCHANGE
CAUSEWAY
PARLEYS CANYON
FREE PORT CENTER
FRANCIS PEAK
GARFIELD STACK

N40°44.85'/W112°11.22'
N40°38.18'/W111°54.23'
N40°54.28'/W112°10.15'
N40°46.67'/W111°53.25'
N40°42.28'/W112°05.92'
N40°31.38'/W112°09.00'
N40°55.30'/W111°53.43'
N41°05.37'/W112°07.17'
N40°42.67'/W111°48.10'
N41°05.92'/W112°02.27'
N41°01.98'/W111°50.30'
N40°43.28'/W112°11.88'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPHE	SPAGHETTI BOWL	N40°43.50'/W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02'/W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80'/W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08'/W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50'/W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50'/W111°53.37'
VPMSH	_____	N41°01.67'/W112°02.47'
VPNSL	_____	N40°50.15'/W111°54.90'
VPNTF	_____	N41°03.57'/W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13'/W112°00.45'
VPOPS	POWER STATION	N41°20.38'/W112°02.78'
VPEN	STATE PRISON	N40°29.88'/W111°53.62'
VPPPT	PROMONTORY POINT	N41°12.28'/W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42'/W111°54.83'
VPVVO	PROVO CANYON	N40°18.77'/W111°39.45'
VPRWY	_____	N40°48.48'/W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83'/W111°54.85'
VPTIP	SOUTH TIP	N40°50.93'/W112°10.92'
VPUOU	U OF U EVENTS CENTER	N40°45.73'/W111°50.28'
VPWBR	WEBER CANYON	N41°08.17'/W111°54.83'
VPWBT	_____	N40°38.00'/W112°03.33'
VPZOO	HOGLE ZOO	N40°45.00'/W111°48.95'

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART

VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPOCN	_____	N33°14.15'/W117°26.63'
VPSBC	BARONA CASINO	N32°56.25'/W116°52.60'
VPSBL	_____	N33°05.18'/W117°18.55'
VPSBM	BLACK MOUNTAIN	N32°58.87'/W117°07.00'
VPSCF	_____	N32°48.55'/W117°09.17'
VPSCM	COWLES MOUNTAIN	N32°48.72'/W117°01.97'
VPSCP	CRYSTAL PIER	N32°47.77'/W117°15.42'
VPSCR	_____	N32°39.37'/W117°07.30'
VPSFB	IRON MOUNTAIN	N32°58.25'/W116°57.33'
VPSLJ	LAKE JENNINGS	N32°51.53'/W116°53.28'
VPSMB	_____	N32°45.57'/W117°12.22'
VPSMP	_____	N33°22.70'/W117°36.75'
VPSMS	MOUNT SOLEDAD	N32°50.40'/W117°15.10'
VPSMV	_____	N32°45.75'/W117°09.80'
VPSMW	MOUNT WOODSON	N33°00.52'/W116°58.23'
VPSOP	OTAY MESA PRISON	N32°35.82'/W116°55.28'
VPSOT	LOWER OTAY LAKE	N32°37.73'/W116°55.38'
VPSPL	SOUTH POINT LOMA	N32°39.90'/W117°14.55'
VPSPP	POWER PLANT	N33°08.25'/W117°20.23'
VPSQS	QUALCOMM STADIUM	N32°46.98'/W117°07.23'
VPSRT	DEL MAR RACE TRACK	N32°58.58'/W117°15.95'
VPSSM	SAN MIGUEL MOUNTAIN	N32°41.78'/W116°56.18'
VPSSV	SAN VICENTE ISLAND	N32°55.53'/W116°55.00'
VPSTP	TORREY PINES GOLF COURSE	N32°54.17'/W117°14.68'
VPSVA	_____	N33°11.48'/W117°16.38'

SAN FRANCISCO SECTIONAL CHART

VPKBG	KINGSBURY GRADE	N38°58.75'/W119°53.20'
-------	-----------------	------------------------

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART

VPALT	ALTAMONT PASS	N37°44.35'/W121°35.42'
VPANT	ANTIOCH BRIDGE	N38°01.45'/W121°45.02'
VPBBR	BENICIA BRIDGE	N38°02.50'/W122°07.45'
VPCAL	CALAVERAS RESERVOIR	N37°28.16'/W121°48.93'
VPCBT	LAKE CHABOT	N37°43.68'/W122°06.94'
VPCOY	COYOTE HILLS	N37°32.50'/W122°05.06'
VPCQZ	CARQUINEZ BRIDGE	N38°03.66'/W122°13.52'
VPCRL	_____	N37°11.00'/W121°41.06'
VPCRY	CRYSTAL SPRINGS CAUSEWAY	N37°30.56'/W122°21.10'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPDUB	DUBLIN	N37°42.06'/W121°55.36'
VPEMB	EMBASSY SUITES	N37°26.05'/W121°53.83'
WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCSH	CAL STATE UNIVERSITY	N37°39.52'/W122°03.52'
VPDAM	DEL VALLE DAM	N37°36.91'/W121°44.78'
VPDLR		N37°07.00'/W121°47.06'
VPDUB	DUBLIN	N37°42.06'/W121°55.36'
VPEMB	EMBASSY SUITES	N37°26.05'/W121°53.83'
VPGGF	GOLDEN GATE FIELDS	N37°53.07'/W122°18.71'
VPGLI	GILROY	N37°01.37'/W121°33.99'
VPHHH	HAMILTON	N38°03.58'/W122°30.66'
VPKGO	KGO	N37°31.58'/W122°06.10'
VPLEX	LEXINGTON RESERVOIR	N37°11.66'/W121°59.18'
VPMID	MID-SPAN SAN MATEO BRIDGE	N37°36.28'/W122°11.81'
VP MOR	MORMON TEMPLE	N37°48.46'/W122°11.95'
VPNUM	NUMMI PLANT	N37°29.56'/W121°56.58'
VPPAC		N37°38.00'/W122°32.07'
VP PRU	PRUNEYARD	N37°17.33'/W121°56.01'
VPSAR	SARATOGA	N37°15.26'/W122°02.33'
VPSLA	SLAC/LINEAR ACCELERATOR	N37°24.75'/W122°14.35'
VPSTB	STINSON BEACH	N37°54.45'/W122°40.41'
VPSUN	SUNOL GOLF COURSE	N37°34.85'/W121°53.23'
VPUTC	U.T.C.	N37°13.93'/W121°41.35'
VPWAL	WALNUT CREEK	N37°53.78'/W122°04.30'
VPWAM		N37°30.28'/W122°10.00'
VPWFR	CEMENT PLANT	N37°30.88'/W122°12.26'

TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART

VPBOV		N27°57.00'/W080°46.75'
VPCNY		N28°30.00'/W080°45.00'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDFI		N29°00.17'/W081°20.85'
VPDUT		N27°37.70'/W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPFFU		N28°57.08'/W081°00.33'
VP GPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VP HUC		N28°19.87'/W082°43.77'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPLEV		N28°48.00'/W080°52.00'
VPLJA		N29°00.00'/W080°51.00'

WASHINGTON SECTIONAL CHART

VSPACE		N38°07.82'/W076°48.75'
VPAXI		N38°34.57'/W076°20.38'
VPBRA		N36°13.75'/W076°08.08'
VP GCE		N36°03.90'/W076°36.42'
VPWZO		N36°00.87'/W075°40.07'

VOR RECEIVER CHECK VOR RECEIVER CHECKPOINTS AND VOR TEST FACILITIES (VOT)

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground. A/ stands for airborne followed by figures (2300) or (1000-3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

ARIZONA VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Bard	116.8/BZA	A/2000	242	5.9	Over interstate 8 freeway crossing canal.
Drake (Ernest A. Love Fld).....	114.1/DRK	A/7000	124	5.0	Over apch end Rwy 30.
Flagstaff (Pulliam).....	113.85/FLG	A/8000	033	6.5	Over red and white square twr.
Fort Huachuca (Sierra Vista Muni/Libby AAF).....	113.6/FHU	G	80		Runup area Twy G at 26 end.
Kingman (Kingman).....	108.8/IGM	G	220	1.0	Center of runup area apch end Rwy 03.
Tucson (Tucson Intl)	116.0/TUS	G	318	0.7	On runup pad northeast of Twy A17.
Willie (Phoenix-Mesa Gateway).....	113.3/IWA	G	124	0.6	On Twy P runup area Rwy 30C.
Winslow (Winslow-Lindbergh Rgnl)	112.6/INW	A/6000	106	5.0	Over apch end Rwy 29.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Phoenix Sky Harbor Intl.	109.0	G	
Phoenix-Mesa Gateway	113.3/IWA	G	On Twy G between Rwy 12R and Rwy 12C.
Prescott (Ernest A. Love Fld)	110.0	G	

CALIFORNIA VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Arcata (Arcata)	110.2/ACV	G	148	0.7	On runup area apch end Rwy 32.
Chico (Chico Muni).....	109.8/CIC	G	302	1.1	On north runup area.
Clovis (Fresno Yosemite Intl)	112.9/CZQ	A/1400	130	7.2	Over apch end Rwy 11L.
Compton Woodley	113.6/LAX	A/1000	091	10.0	Over apch end Rwy 25L.
Concord (Buchanan Field).....	117.0/CCR	A/1200	172		Over apch end Rwy 19L.
Daggett (Barstow-Daggett)	113.2/DAG	A/2800	223	11.7	Over apch end Rwy 22.
El Nido (Merced Muni/Macready Fld).....	114.2/HYP	A/1200	290		Over apch end Rwy 30.
Fortuna (Murray Fld).....	114.0/FOT	A/1500	015	9.6	Over Rwy apch end 11.
Fortuna (Rohnerville).....	114.0/FOT	A/1400	130	8.2	Over apch end Rwy 11.
Guadalupe (Santa Maria Pub/Capt G Allan Hancock Fld)	111.0/GLJ	A/1200	118		Over apch end Rwy 30.
Imperial (Imperial County).....	115.9/IPL	A/1500	313	5.7	Over apch end Rwy 32.
Lake Hughes (General Wm J. Fox Airfield)	108.4/LHS	G	065	18.1	On the main ramp at east terminal gas pit.
Maxwell (Willows-Glenn County)	110.0/MXW	A/1200	342	11.5	Over apch end Rwy 34.

VOR RECEIVER CHECK

385

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Modesto (Modesto City-Co-Harry Sham Fld)	114.6/MOD	G	093	0.6	On ramp area next to intersection of Taxiways A and A1.
Oakland (Metropolitan Oakland Intl)	116.8/OAK	G	081	0.9	On runup pad end of Rwy 27R and 27L.
Palmdale (General Wm. J. Fox Airfield)	114.5/PMD	A/5000	296	10.1	Over center taxiway/runway intersection.
Paradise (Ontario Intl)	112.2/PDZ	G	320	8.9	Intersection of Twy Q, Twy P and Rwy 26L.
Paso Robles (Paso Robles Muni).....	114.3/PRB	G	247	0.4	Transient parking ramp front of terminal.
Placerville (Placerville)	115.5/HNW	A/5200	076	8.7	Dam on west end of lake.
Pomona (Cable).....	110.4/POM	A/3500	053	5.1	Over apch end of Rwy 06.
Red Bluff	115.7/RBL	A/1500	358	5.8	Over the center of Red Bluff Fairgrounds Race Track.
Redding (Redding Muni).....	108.4/RDD	G	310	0.5	Over runup area apch end Rwy 12.
Sacramento (McClellan Airfield)	109.2/MCC	G	358	.9	On Taxiway at end of Rwy 16.
	109.2/MCC	G	015	0.4	On Taxiway B.
Sacramento (Sacramento Executive).....	115.2/SAC	A/1000	016	4.4	Over apch end Rwy 02.
Salinas (Salinas Muni).....	117.3/SNS	G	247	0.4	Intersection of twys C and D.
San Francisco (San Francisco Intl).....	115.8/SFO	A/1800	153	6.7	Over Crystal Springs causway 5 NM west of San Carlos arpt.
San Jose (Norman Y. Mineta San Jose Intl) .	114.1/SJC	G	123	1.7	On Twy B and runup area Rwy 30L.
San Jose (Norman Y. Mineta San Jose Intl) .	114.1/SJC	G	132	0.6	Twy V abeam Twy J.
Santa Barbara	114.9/RZS	A/2000	279	11	Over Lake Cachuma Dam spillway.
Santa Barbara (Santa Barbara Muni).....	114.9/RZS	G	197	5.8	At intersection of Taxiway D and H.
Santa Rosa (Charles M. Schulz-Sonoma Co)	113.0/STS	A/2000	323	5.9	River bridge on Highway 101.
	113.0/STS	G	121		.5 NM runup Rwy 32.
	113.0/STS	G	344		.4 NM runup Rwy 14.
Scaggs Island (Napa County).....	112.1/SGD	A/1000	047	5.4	Over rotating beacon.
Thermal (Jacqueline Cochran Rgnl)	116.2/TRM	G	329	0.3	On centerline of twy 375' in front of hangar.
Van Nuys	113.1/VNY	G	169	0.5	At intersection of Twy D and Twy A.
	113.1/VNY	G	161	1.6	On West runup area rwy 34L.
	113.1/VNY	G	142	0.4	Runup area Rwy 16L.
Ventura (Camarillo)	108.2/VTU	G	330	6.1	Runup Rwy 26.
	108.2/VTU	G	320	6.5	Runup Rwy 08.
Ventura (Oxnard)	108.2/VTU	G	289	9.0	On parallel Twy W of Rwy 25 runup area.
Visalia (Visalia Muni)	109.4/VIS	A/1300	107	5.0	Over apch end rwy 12.
Woodside (Hayward Executive).....	113.9/OSI	G	009		Runup area Rwy 28L.
Woodside (San Carlos)	113.9/OSI	A/2000	355	7.2	Over Rwy 30 numbers.

VOR RECEIVER CHECK VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Bakersfield	111.2	G	
Hawthorne (Jack Northrop Fld/Hawthorne Muni)	113.9	G	Unusable on south taxiway.
Long Beach (Daugherty Field)	113.9	G	Unusable all areas except runup Rwy 25L at Taxiway J, runup Rwy 25R.
Los Angeles Intl	113.9	G	Unusable all areas except intersection of Twys A at G runup Rwy 25L at Twy F and intersection of Twy C at N.
Sacramento Executive	111.4	G	
Sacramento Intl	111.4	G	
San Diego (EL Cajon) (Gillespie Fld)	110.0	G	
San Diego Intl	109.0	G	Unusable all areas except runup area Rwy 27.
San Diego (Montgomery)	109.0	G	Unusable all areas except runup areas for Rwys 05 and 28L.
San Francisco Intl	111.0	G	
Santa Ana (John Wayne Airport/Orange Co)	110.0	G	
Santa Monica Muni	113.9	G	Unusable all areas except runup areas for Rwys 03 and 21.
Torrance (Zamperini Fld)	113.9	G	

COLORADO VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Akron	114.4/AKO	A/6000	179	7.0	Over lgtd twr.
Cortez (Cortez Muni)	108.4/CEZ	A/7000	196		Over apch end rwy 21.
Denver (Rocky Mountain Metropolitan)	115.4/BJC	G	060	0.6	Runup area at Alpha 17.
Hayden (Craig-Moffat)	115.6/CHE	A/7200	248	9.6	Over apch end rwy 25.
Pueblo (Pueblo Memorial)	116.7/PUB	G	249	3.8	On painted circle with arrow on runup pad S side apch end rwy 08L.
	116.7/PUB	A/7300	294	7.8	Over KOAA TV twr, 5.4 NM of arpt.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Centennial	108.2	G	VOT unusable east of Twy C-4.
(City of Colorado Springs Muni)	110.4	G	
Denver International	110.0	G	VOT unusable in terminal area N of Twy AA to Twy BN and W Twy L to Twy F.

NEVADA

VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Bullion (Elko Rgnl)	114.5/BQU	A/7000	343	5.1	Over center of race track.
Ely (Ely Arpt/Yelland Fld)	110.6/ELY	G	059		Intersection of Twy A and Twy B.
Mustang (Reno/Stead)	117.9/FMG	A/7000	291	12.8	Over atct.
Wells (Wells Muni/Harriet Fld)	114.2/LWL	A/7000	286	8.3	Over radio twr.
Winnemucca Muni	108.2/INA	A/6000	024	6.5	Over highway bridge crossing railroad tracks.
	108.2/INA	G	134	.8	Runup area Rwy 32.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Las Vegas (North Las Vegas)	108.2	G	

NEW MEXICO

VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag.	Dist. from Fac. N.M.	Checkpoint Description
Carlsbad (Carlsbad City Air Terminal)	116.3/CNM	G	333	5.4	On Twy A in front of fire department.
Hobbs (Lea County Rgnl)	111.0/HOB	G	030	3.5	On runup pad apch end Rwy 03.
Las Vegas (Las Vegas Muni)	117.3/LVS	A/8500	233	6.0	Over yellow water tank.
Roswell (Roswell Intl Air Center)	116.1/CME	G	100	5.2	On middle of W ramp adjacent to twy.
Santa Fe (Santa Fe County Muni)	110.6/SAF	G	334	4.7	At junction main intersection of twy and ramp. (Checkpoint unusable).
Silver City (Grant Co)	110.8/SVC	G	100	0.9	Twy entrance to Rwy 26 just west of approach end.
Texico (Clovis Muni)	112.2/TXO	A/6000	240	12.7	Over rotating beacon on steel twr adjacent to terminal bldg.
Truth or Consequences (Truth or Consequences Muni)	112.7/TCS	G	155	3.2	On Twy A 2000' from AER 31.
Tucumcari (Tucumcari Muni)	113.6/TCC	G	258	0.5	100' in front of terminal on twy.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Albuquerque Intl. Sunport	111.0	G	

VOR RECEIVER CHECK UTAH

VOR RECEIVER CHECKPOINTS

Facility Name (Airport Name)	Freq/Ident	Type Check Pt. Gnd.	Azimuth from Fac.	Dist. from Fac.	Checkpoint Description
		AB/ALT	Mag.	N.M.	
Cedar City (Cedar City Rgnl).....	117.3/CDC	A/6500	177	4.7	Over apch end Rwy 20.
Delta (Delta Muni).....	116.1/DTA	A/6000	346	5.3	Over apch end of Rwy 17.
Vernal (Vernal Rgnl)	108.2/VEL	A/8000	021	6.5	Over towers on knoll.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type, VOT Facility	Remarks
Salt Lake City Intl	111.0	G	

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unless otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods of activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the locations listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower or ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
ARIZONA			
(c) Buckeye Muni	8 NM; 089° Buckeye	14,000	Daily SR–2 hours after SS. 2 NM radius.
(c) Bullhead City, Eagle Airpark ..	10 NM; 300° Needles.....	15,000	3 NM Daily 0645–1835
(c) Casa Grande Muni	9 NM; 041° Stanfield.....	12,000	2 NM Daily 0600–1700.
(c) Coolidge Muni	25 NM; 070° Stanfield.....	17,999	15 NM radius, daily. High altitude, full canopy, free fall, and low level combat parachute jumping. Large military transports in vicinity of arpt.
(c) Cottonwood Arpt	22.1 NM; 072° Drake	14,000	Continuous during daylight hrs.
(c) Eloy Muni	17 NM; 094° Stanfield.....	17,500	Albuquerque Center 124.5 4 NM radius. Daily SR–2 hours after SS (cfc UNICOM for PAJA advisories. Landing area ¼ mile E of rwy centerline).
(c) Estrella Sailport	17 NM; 300° Stanfield.....	14,000	1 NM radius. Daily SR–SS.
Kingman Arpt	25 NM; 334° Kingman	12,000	5 NM radius, daily SR–SS.
(c) Casa Grande Muni	11.8 NM; 048° Bard	25,000	Continuous 24 hrs. 5 NM radius, Laguna AAF Control Zone.
(c) Marana Rgnl	25 NM; 308° Tucson	17,999	15 NM radius, Continuous. Tucson Tower 125.1
(c) Marana, Pinal Airpark	33 NM; 308° Tucson	25,000	15 NM radius, Continuous.
CALIFORNIA			
Apple Valley Arpt	10 NM; 073° Victorville.....	15,000	2 NM radius, daily SR–SS.
(c) Brickland's Ranch	12.5 NM; 339° Redding	3,900	3 NM radius, May 1 thru Nov 1 yearly.
(c) Byron Arpt	23 NM; 250° Manteca	15,000	Daily SR–SS
(c) California City Muni Arpt	30 NM; 348° Palmdale	17,500	Daily SR–SS.
(c) Camarillo Arpt	8.4 NM; 000° Ventura	14,000	2 NM radius, usually blo 10,000', SR–SS; Listen for 1-minute call on Camarillo Twr freq.
(c) Cloverdale Muni Arpt	18 NM; 316° Santa Rosa	12,500	1 NM radius, Mon–Sun 0800–2100.
(c) Davis/Woodland/Winters, Yolo Co	16.5 NM; 283° Sacramento	13,500	3 NM radius, daily SR–2300.
(c) Fall River Mills Arpt	34.4 NM; 63° Redding	8,700	2 NM radius, daily May 1–Nov 30.
(c) Hemet/Diamond Valley	12.5 NM; 107° Homeland	14,000	3 NM radius. Wed–Fri 0900–SS. Sat–Sun 0800–SS, other days and times by request.
(c) Hollister Muni	16.6 NM; 017° Salinas.....	17,999	1 NM. Daily, all hours. Oakland Center 128.7
(c) Lake Elsinore, Skylark Fld	10.5 NM; 198° Homeland	14,000	1 NM radius, 0800–SS daily
(c) Lincoln Rgnl/Karl Harder Fld ..	14.7 NM; 353° McClellan.....	15,000	Daily 0800–SR
(c) Lodi Arpt	15 NM; 285° Linden	15,000	Continuous 24 hrs. 1 NM radius. Other altitudes by notam.
Lompoc Arpt	20 NM; 277° Gaviota.....	15,000	4 NM radius, Thu–Mon SR–SS.
(c) Lompoc	14 NM; 284° Gaviota.....	17,999	1 NM radius, daily 1600–0400.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
(c) Los Alamitos AAF	At field.....	1,500 AGL	Weekends and occasional weekdays
(c) Madera Muni Arpt	15.2 NM; 277° Clovis	15,000	3 NM radius. Daily SR–1 hour after SS.
(c) Marina Muni	7.6 NM; 259° Salinas	12,500	SR–SS Sat and Sun
Murrieta, Bear Creek Arpt.....	13 NM; 178° Homeland	11,500	1 NM radius. Mon–Fri 0800–sunset, Sat–Sun 0630–sunset.
(c) Oro Loma, Eagle Fld	12 NM; 010° Panoche	12,500	2 NM radius, Fri–Sun.
Palm Springs	12 NM; 130° Palm Springs.....	14,000	1 NM radius. Daily sunrise to sunset.
(c) Paradise Skypark Arpt	12 NM; 097° Chico	14,500	Daily, 0800–SS.
(c) Perris Valley Arpt.....	1 NM; 220° Homeland	14,500	Daily SR–SS
(c) Salinas, Davis Road Drop Zone.....	6 NM; 235° Salinas.....	18,000	1 NM radius, Daily 0500–1900
(c) San Diego, Brown Fld Muni ...	2.3 NM 157° Poggi.....	14,000	2 NM radius. Mon–Fri 0800–1800.
(c) San Diego, Leon Drop Zone ..	11.5 NM; 192° Mission Bay	2,800	Continuous. 1NM radius. Altitudes above 2800–15000 MSL avbl upon request, (ctc SOCAL prior to entering Terminal Control Area).
(c) San Diego, Otay Reservoir	4.4 NM; 058° Poggi.....	5,800	1NM radius. Daily SR–SS.
(c) San Diego, South Bay	7 NM; 136° Mission Bay	2,800	Daily SR–SS. 1NM radius altitudes above 2800–3300 MSL avbl upon request, (ctc SOCAL prior to entering Terminal Control Area).
(c) San Diego, Trident	5 NM; 111° Poggi.....	15,000	Daily SR–SS. 1NM radius
Santa Maria	5 NM; 021° Guadalupe	12,500 AGL	0900–SS, Sat, Sun and holidays
(c) Santa Ynez	8 NM; 293° Gaviota.....	17,999	1 NM radius, daily 1600–0400.
(c) Slate Creek	30 NM; 323° Redding.....	5,500	3 NM radius. May 1 thru Nov 1 yearly.
(c) Taft Drop Zone	25.7 NM; 197° Shafter	13,000	1 NM radius. SR–SS, occasional night jumps by NOTAM.
(c) Taft–Kern Co Arpt	21 NM; 066° Fellows.....	13,000	2 NM radius. Daily SR–SS, occasional ngt jumps by NOTAM.
(c) Tres Pinos Drop Zone	16 NM; 045° Salinas.....	12,500	1 NM radius. Daily SR–SS.
(c) Twentynine Palms	12 NM; 265° Twentynine Palms ..	12,500	1 NM radius, 0900–SS, Sat, Sun, and holidays.
(c) Wilton Drop Zone	17.5 NM; 080° Sacramento	1,500 AGL	Hvy equip, paratroopers.
COLORADO			
Boulder Muni	9 NM; 328° Jeffco	18,000	2 NM radius. Daylight hrs.
(c) Brush Muni	19.6 NM 277° Akron	17,700	2 NM radius. Daily 0800–SS.
(c) Calhan Arpt	17NM; 057° Black Forrest.....	17,500	2 NM radius, 1hr before SR– 1 hr after SS daily.
(c) Canon City, Fremont County Arpt	32.9 NM; 271° Pueblo.....	17,500	2 NM radius. Weekends 0600–2100.
(c) Colorado Springs, USAF Academy Airstrip	9 NM; 266° Black Forrest.....	17,500	Daily SR–SS occasionally til 2200.
(c) Fort Collins/Loveland Muni Arpt	19.5 NM; 248° Gill.....	17,500	3 NM Wed–Sun SR–1 hr after SS.
Greeley, Skydive the Farm	16 NM; 308° Gill.....	14,500	2 NM radius. Fri–Sun 0800–SS.
(c) Hugo, Kelly Drop Zone.....	10 NM; 254° Hugo	8,000	2 NM radius. Heavy equipment paratroopers possible jumps during IFR/marginal VFR.
(c) Longmont, Vance Brand Arpt ..	15 NM; 346° Jeffco	17,900	2 NM radius. Daily SR–2 hrs after SS.
(c) Trinidad, Pinon Drop Zone	28 NM; 279° Tobe	8,000	2 NM radius. Heavy equipment paratroopers possible jumps during IFR/marginal VFR.

PARACHUTE JUMPING AREAS

391

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
NEVADA			
(c) Boulder City Arpt	3 NM; 164° Boulder City	17,000	0.5 NM radius. Daily SR-SS.
(c) El Dorado Jump Zone	7 NM; 195° Boulder City	17,000	0.5 NM radius. Daily, SR-SS.
Indian Springs AF Aux Arpt	38 NM; 304° Las Vegas	10,000	5 NM radius. Daily SR-SS.
(c) Jean Drop Zone	24.1 NM; 191° Las Vegas	15,000	1 NM radius. Daily SR-SS.
(c) Mesquite Arpt	11.4 NM; 054° Mormon Mesa ...	17,500	2 NM radius. Continuous SR-SS.
(c) Minden-Tahoe Arpt	26 NM; 098° Squaw Valley	17,000	5 NM radius. Daily SR-SS.
(c) Nellis AFB, Gunfighter Drop Zone	12.7 NM; 25° Las Vegas	17,500 AGL	1.3 NM east of rwys. SR-SS Sat-Sun. Other times by NOTAM. Tue-Sun SR-SS
(c) Pahrump	49 NM; 126° Beatty	12,500	1.0 NM radius. Daily SR-SS.
Reno/Stead Arpt	15 NM; 292° Mustang	14,000	1 NM radius. Daily SR-SS.
(c) Tonopah Arpt	10 NM; 270° Tonopah	10,000	
NEW MEXICO			
Albuquerque	6 NM; 050° Albuquerque	18,000	Weekends and holidays
	17 NM; 140° Albuquerque	17,000	SR-SS weekends.
(c) Belen, Alexander Muni	12 NM; 346° Socorro	16,000	1 NM radius. Daily SR-SS.
(c) Santa Teresa, Dona Ana Co at Santa Teresa Arpt	22 NM; 268° El Paso	13,000	1 NM radius. SR-SS Sat-Sun. S side of arpt.
UTAH			
(c) Cedar Fort, Cedar Valley Arpt	6.5 NM; 313° Fairfield	17,500	3 NM radius. Daily SR-2300.
Goshen Wells, Cedar Valley	4 NM; 270° Fairfield	10,000	0.25 NM radius. Occasional use
(c) Hurricane, General Dick Stout Fld	15 NM; 060° St George	15,000	1 NM radius. Daily SR-SS.
Logan, Logan-Cache Arpt	7.2 NM; 051° Brigham City	15,000	0.5 NM radius 0900-sunset. Weekends and Holidays.
(c) Ogden-Hinckley	5 NM; 085° Ogden	17,999	2 NM radius. Daily SR-SS. NE corner Ogden Arpt.
(c) Bolinder Fld-Tooele Valley Arpt	24 NM; 215° Wasatch	17,000	2 NM radius. Daily 1300-0600.

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

ALBUQUERQUE SECTIONAL

84th Edition, 22 Oct 2009

OBSTRUCTIONS

22 Oct – 17 Dec 2009 No Major Changes.

AIRPORTS

22 Oct – 17 Dec 2009 No Major Changes.

NAVAIDS

22 Oct – 17 Dec 2009 No Major Changes.

AIRSPACE

22 Oct – 17 Dec 2009 No Major Changes.

SPECIAL USE AIRSPACE

22 Oct – 17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Oct – 17 Dec 2009 No Major Changes.

MISCELLANEOUS

22 Oct – 17 Dec 2009 No Major Changes.

CF-16 WORLD AERONAUTICAL CHART

38th Edition, 15 Jan 2009

OBSTRUCTIONS

12 Mar 2009 – 17 Dec 2009 No Major Changes.

AIRPORTS

12 Mar 2009 – 17 Dec 2009 No Major Changes.

NAVAIDS

12 Mar 2009 Change ROME VORTAC freq from 122.5 to 112.5, 42°35'26"N, 117°52'05"W.

7 May 2009 – 17 Dec 2009 No Major Changes.

AIRSPACE

12 Mar 2009 – 17 Dec 2009 No Major Changes.

SPECIAL USE AIRSPACE

12 Mar 2009 – 17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

12 Mar 2009 – 17 Dec 2009 No Major Changes.

MISCELLANEOUS

12 Mar 2009 – 17 Dec 2009 No Major Changes.

CG-19 WORLD AERONAUTICAL CHART**39th Edition, 4 Jun 2009****OBSTRUCTIONS****2 Jul 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****2 Jul 2009** Add arpt elev 1071, lighting code *L, runway length 71 and unicom at GLENDALE arpt, 33°31'36"N, 112°17'42"W.**27 Aug 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****2 Jul 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****2 Jul 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****2 Jul 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****2 Jul 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****2 Jul 2009 – 17 Dec 2009** No Major Changes.**CHEYENNE SECTIONAL****80th Edition, 30 Jul 2009****OBSTRUCTIONS****27 Aug 2009** Add windmill farm. 6365'UC is highest MSL, 43°04'40"N, 105°50'43"W. Add obst 6988'MSL (407'AGL)UC, 41°08'23"N, 104°59'52"W.**22 Oct 2009** Add obst 7523'MSL (263'AGL)UC, 41°39'15"N, 106°04'16"W.

Add obst 7508'MSL (391'AGL)UC, 41°40'22"N, 105°59'52"W.

Add obst 5157'MSL (258'AGL)UC, 42°41'04"N, 103°55'53"W.

17 Dec 2009 Add obst 6584'MSL (363'AGL)UC, 41°10'42"N, 104°53'05"W.

Add obst 5047'MSL (350'AGL)UC, 41°38'30"N, 104°08'23"W.

Add obst 5078'MSL (341'AGL)UC, 43°43'57"N, 105°21'49"W.

Add obst 5208'MSL (305'AGL)UC, 43°24'53"N, 106°15'06"W.

Add obst 7127'MSL (262'AGL)UC, 41°57'30"N, 106°26'20"W.

AIRPORTS**27 Aug 2009 – 22 Oct 2009** No Major Changes.**17 Dec 2009** Change RP 12 to RP 13 at BLACK HILLS-CLYDE ICE arpt, 44°28'52"N, 103°47'09"W.

Change CTAF 122.8 to 122.9 at SOUTH BIG HORN CO arpt, 44°31'00"N, 108°04'58"W.

NAVAIDS**27 Aug 2009** Delete ANTELOPE NDB, 41°36'15"N, 109°00'06"W.**22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009** Add RUSHVILLE, NE Class E: That airspace extending upward from 700 feet above the surface within a 7.3-mile radius of Modisett airport.**22 Oct 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

DENVER SECTIONAL

81st Edition, 30 Jul 2009

OBSTRUCTIONS

27 Aug 2009 Add obst 6498' MSL (455' AGL) UC, 39°54'22"N, 105°13'31"W.

22 Oct 2009 No Major Changes.

17 Dec 2009 Add obst 6846' MSL (235' AGL) UC, 39°57'14"N, 108°18'47"W.

AIRPORTS

27 Aug 2009 No Major Changes.

22 Oct 2009 Delete GANADO arpt, 35°42'06"N, 109°31'00"W.

Delete GHOST arpt, 36°18'10"N, 106°29'17"W.

17 Dec 2009 LA MESA PARK arpt abandoned, 36°51'25"N, 104°26'52"W.

NAVAIDS

27 Aug 2009 – 17 Dec 2009 No Major Changes.

AIRSPACE

27 Aug 2009 No Major Changes.

22 Oct 2009 Revise MONTROSE, CO Class E5: That airspace extending upward from 700 feet above the surface within a 7.2-mile radius of the Montrose Regional Airport and within 4.3 miles northeast and 8.3 miles southwest of the Montrose VOR/DME 313° and 133° radials extending from 7.2 miles southeast to 21.4 miles northwest of the VOR/DME, and within 4 miles each side of the Montrose VOR/DME 360° radial extending to 13.6 miles north of the VOR/DME; and that airspace extending upward from 1,200 feet above the surface within an area bounded by a point beginning at 38°40'00"N, 108°46'00"W; to 38°25'00"N, 108°42'30"W; to 37°58'00"N, 108°10'00"W; to 38°09'00"N, 107°35'00"W; to 38°43'00"N, 107°39'30"W; to 38°51'30"N, 107°41'00"W; to 39°01'00"N, 107°47'00"W; to 39°01'00"N, 108°09'00"W; thence to the point of beginning.

17 Dec 2009 Revise PUEBLO, CO Class E: That airspace extending upward from 700 feet above the surface within 21.8-mile radius of the Pueblo Memorial Airport, and within the 28.8-mile radius of Pueblo Memorial Airport clockwise between the 070° and 133° bearing from the airport; that airspace extending upward from 1,200 feet above the surface bounded on the north by 38°30'00"N, on the east by V-169, on the south by V-210, on the west by a line from 37°38'00"N, 105°00'02"W; to 38°09'25"N, 105°08'06"W; to 38°05'51"N, 105°30'49"W; to 38°10'00"N, 105°33'02"W; to 38°30'00"N, 105°33'02"W; that airspace extending upward from 13,700 feet MSL bounded by a line beginning at 38°09'25"N, 105°08'06"W; to 37°38'00"N, 105°00'02"W; to 37°34'00"N, 105°12'02"W; to 38°05'51"N, 105°30'49"W; thence to point of beginning, excluding that airspace within Federal airways and the Colorado Springs, CO, Class E airspace area.

SPECIAL USE AIRSPACE

27 Aug 2009 – 17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 17 Dec 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 17 Dec 2009 No Major Changes.

DENVER/COLORADO SPRINGS TERMINAL AREA CHART

72nd Edition, 30 Jul 2009

OBSTRUCTIONS

27 Aug 2009 Add obst 6498' MSL (455' AGL) UC, 39°54'22"N, 105°13'31"W.

22 Oct 2009 – 17 Dec 2009 No Major Changes.

AIRPORTS

27 Aug 2009 – 17 Dec 2009 No Major Changes.

NAVAIDS

27 Aug 2009 – 17 Dec 2009 No Major Changes.

AIRSPACE

27 Aug 2009 – 22 Oct 2009 No Major Changes.

17 Dec 2009 Revise PUEBLO, CO Class E: That airspace extending upward from 700 feet above the surface within 21.8-mile radius of the Pueblo Memorial Airport, and within the 28.8-mile radius of Pueblo Memorial Airport clockwise between the 070° and 133° bearing from the airport; that airspace extending upward from 1,200 feet above the surface bounded on the north by 38°30'00"N, on the east by V-169, on the south by V-210, on the west by a line from 37°38'00"N, 105°00'02"W; to 38°09'25"N, 105°08'06"W; to 38°05'51"N, 105°30'49"W; to 38°10'00"N, 105°33'02"W; to 38°30'00"N, 105°33'02"W; that airspace extending upward from 13,700 feet MSL bounded by a line beginning at 38°09'25"N, 105°08'06"W; to 37°38'00"N, 105°00'02"W; to 37°34'00"N, 105°12'02"W; to 38°05'51"N, 105°30'49"W; thence to point of beginning, excluding that airspace within Federal airways and the Colorado Springs, CO, Class E airspace area.

SPECIAL USE AIRSPACE

27 Aug 2009 – 17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

27 Aug 2009 – 17 Dec 2009 No Major Changes.

MISCELLANEOUS

27 Aug 2009 – 17 Dec 2009 No Major Changes.

EL PASO SECTIONAL
83rd Edition, 30 Jul 2009**OBSTRUCTIONS****27 Aug 2009** No Major Changes.**22 Oct 2009** Add obst 4390' MSL (310' AGL) UC, 32°04'52"N, 106°16'32"W.
Add obst 5015' MSL (250' AGL) UC, 30°23'40"N, 102°50'44"W.**17 Dec 2009** No Major Changes.**AIRPORTS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

GRAND CANYON VFR AERONAUTICAL CHART
3rd Edition, 19 Apr 2001**OBSTRUCTIONS****17 May 2001 – 17 Dec 2009** No Major Changes.**AIRPORTS****17 May 2001 – 10 May 2007** No Major Changes.**5 Jul 2007** Delete TASSI arpt, 36°15'09"N, 113°57'54"W.

Delete THE RANCH arpt, 36°00'37"N, 112°17'30"W.

30 Aug 2007 – 17 Dec 2009 No Major Changes.**NAVAIDS****17 May 2001 – 17 Dec 2009** No Major Changes.**AIRSPACE****17 May 2001 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****17 May 2001 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****17 May 2001 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****17 May 2001** Blue Direct North (BDN) west bound route, add 10,500 with a westbound arrow above the 8,500 figure just west of Supai/Diamond Creek Sector boundary.**12 Jul 2001 – 17 Dec 2009** No Major Changes.

KLAMATH FALLS SECTIONAL**81st Edition, 24 Sep 2009****OBSTRUCTIONS****22 Oct 2009** No Major Changes.**17 Dec 2009** Add obst 721' MSL (211' AGL), 43°31'58"N, 124°12'18"W.**AIRPORTS****22 Oct 2009** Delete RED & WHITE arpt, 43°07'09"N, 121°02'41"W.

Delete UNITY arpt, 44°27'05"N, 118°11'12"W.

17 Dec 2009 Delete CUBEHOLE arpt, 44°21'52"N, 122°57'30"W.

Delete WILSON arpt, 44°12'44"N, 120°31'26"W.

Delete LAWEN arpt, 43°28'46"N, 118°49'51"W.

NAVAIDS**22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****22 Oct 2009** Add NORTH BEND, OR Class D: That airspace extending upward from the surface to and including 2500 feet MSL within a 4.2-mile radius of the Southwest Oregon Regional Airport. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.**17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009 – 17 Dec 2009** No Major Changes.

LAS VEGAS SECTIONAL**82nd Edition, 27 Aug 2009****OBSTRUCTIONS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**17 Dec 2009** Add airway V626 from MYTON VOR/DME, (MTU)250° to FAIRFIELD VOTAC, (FFU)110°.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

LAS VEGAS TERMINAL AREA CHART**71st Edition, 27 Aug 2009****OBSTRUCTIONS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

LOS ANGELES HELICOPTER ROUTE CHART

8th Edition, 22 Dec 2005

OBSTRUCTIONS

22 Dec 2005 – 13 Apr 2006 No Major Changes.
8 Jun 2006 Add group obst 405' MSL (390' AGL) UC, 33°43'39"N, 118°14'19"W.
3 Aug 2006 – 15 Jan 2009 No Major Changes.
12 Mar 2009 Add obst 421' MSL (348' AGL), 33°53'39"N, 118°13'31"W.
7 May 2009 – 17 Dec 2009 No Major Changes.

AIRPORTS

22 Dec 2005 – 3 Aug 2006 No Major Changes.
28 Sep 2006 Delete METHODIST heliport, 34°08'00"N, 118°02'33"W.
Delete SAN PEDRO PENINSULA heliport, 33°44'19"N, 118°18'38"W.
23 Nov 2006 – 30 Aug 2007 No Major Changes.
25 Oct 2007 Delete ANAHEIM POLICE heliport, 33°49'35"N, 117°54'05"W.
20 Dec 2007 – 20 Nov 2008 No Major Changes.
15 Jan 2009 Add SAN BERNARDINO INTL ATCT 119.45, 34°05'43"N, 117°14'06"W.
EL TORO MCAS arpt abandoned, 33°40'34"N, 117°43'52"W.
Change CTAF freq 122.975 to 119.45 at SAN BERNARDINO INTL arpt, 34°05'43"N, 117°14'06"W.
12 Mar 2009 – 17 Dec 2009 No Major Changes.

NAVAIDS

22 Dec 2005 – 15 Jan 2009 No Major Changes.
12 Mar 2009 Change RIVERSIDE VOR position from 33°57'07"N, 117°26'57"W to 33°57'19"N, 117°26'59"W, and magnetic variation from 15E to 14E.
7 May 2009 – 17 Dec 2009 No Major Changes.

AIRSPACE

22 Dec 2005 – 25 Sep 2008 No Major Changes.
20 Nov 2008 Add SAN BERNARDINO, CA Class D: That airspace extending upward from the surface to and including 3200 feet MSL beginning at 34°08'09"N, 117°18'40"W; to 34°08'09"N, 117°11'13"W; to 34°07'42"N, 117°10'26"W; to 34°02'24"N, 117°10'26"W; thence via the 4.5 nautical mile radius of the San Bernardino Airport clockwise to the point of beginning. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective dates and times will thereafter be continuously published in the Airport/Facility Directory.
15 Jan 2009 – 2 Jul 2009 No Major Changes.
27 Aug 2009 Change SANTA ANA Class C freq from 380.2 to 279.575
22 Oct 2009 No Major Changes.
17 Dec 2009 Change ONTARIO INTL ATCT freq. from 385.6 to 360.775, 34°03'22"N, 117°36'04"W.

SPECIAL USE AIRSPACE

22 Dec 2005 – 17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

22 Dec 2005 – 17 Dec 2009 No Major Changes.

MISCELLANEOUS

22 Dec 2005 – 8 Jun 2006 No Major Changes.
3 Aug 2006 Change MEF 0° to 0°6' in quadrant 33°30'–33°45"N, 118°00'–118°15"W.
28 Sep 2006 – 17 Dec 2009 No Major Changes.

LOS ANGELES SECTIONAL

86th Edition, 17 DEC 2009

OBSTRUCTIONS

17 Dec 2009 No Major Changes.

AIRPORTS

17 Dec 2009 No Major Changes.

NAVAIDS

17 Dec 2009 No Major Changes.

AIRSPACE

17 Dec 2009 No Major Changes.

SPECIAL USE AIRSPACE

17 Dec 2009 No Major Changes.

MILITARY TRAINING ROUTES

17 Dec 2009 No Major Changes.

MISCELLANEOUS

17 Dec 2009 No Major Changes.

LOS ANGELES TERMINAL AREA CHART**60th Edition, 17 Dec 2009****OBSTRUCTIONS****17 Dec 2009** No Major Changes.**AIRPORTS****17 Dec 2009** No Major Changes.**NAVAIDS****17 Dec 2009** No Major Changes.**AIRSPACE****17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****17 Dec 2009** No Major Changes.**MISCELLANEOUS****17 Dec 2009** No Major Changes.

PHOENIX SECTIONAL**82nd Edition, 22 Oct 2009****OBSTRUCTIONS****22 Oct 2009** No Major Changes.**17 Dec 2009** Add obst 6479'MSL (41.7'AGL)UC, 34°38'19"N, 110°18'56"W.**AIRPORTS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****22 Oct 2009** No Major Changes.

17 Dec 2009 Revise LAKE HAVASU, AZ. Class E: That airspace extending upward from 700 feet above the surface within a 6.7-mile radius of Lake Havasu City Airport and within 1 mile each side of the Lake Havasu City Airport 150° bearing extending from the 6.7-mile radius to 13 miles southeast of the Lake Havasu City Airport, excluding that airspace with a 2.3-mile radius of Chemehuevi Valley Airport. That airspace extending upward from 1,200 feet above the surface bounded by a line beginning at 34°42'47"N, 114°29'37"W; to 34°42'47"N, 114°12'06"W; to 34°23'00"N, 114°12'06"W; to 34°17'19"N, 114°32'12"W; thence to the point of beginning.

SPECIAL USE AIRSPACE**22 Oct 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009 – 17 Dec 2009** No Major Changes.

PHOENIX TERMINAL AREA CHART
41st Edition, 22 Oct 2009**OBSTRUCTIONS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009 – 17 Dec 2009** No Major Changes.

SALT LAKE CITY HELICOPTER ROUTE CHART
3rd Edition, 26 Oct 2006**OBSTRUCTIONS****23 Nov 2006 – 17 Dec 2009** No Major Changes.**AIRPORTS****23 Nov 2006 – 10 Apr 2008** No Major Changes.**5 Jun 2008** Delete PAYNE arpt, 41°05'54"N, 112°06'56"W.

Delete WARD heli, 40°35'59"N, 111°48'03"W.

31 Jul 2008 – 25 Sep 2008 No Major Changes.**20 Nov 2008** Delete CHANNEL 4 heli, 40°43'57"N, 111°57'20"W.**15 Jan 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****23 Nov 2006 – 17 Dec 2009** No Major Changes.**AIRSPACE****23 Nov 2006 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****23 Nov 2006 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****23 Nov 2006 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****23 Nov 2006 – 17 Dec 2009** No Major Changes.

SALT LAKE CITY SECTIONAL
82nd Edition, 22 Oct 2009**OBSTRUCTIONS****22 Oct 2009** No Major Changes.**17 Dec 2009** Change obst from 6143'MSL (302'AGL) to 6214'MSL (345'AGL), 42°51'46"N, 112°31'06"W.**AIRPORTS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****22 Oct 2009** No Major Changes.**17 Dec 2009** Add airway V626 from MYTON VOR/DME, (MTU)250° to FAIRFIELD VOTAC, (FFU) 110°.**SPECIAL USE AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009 – 17 Dec 2009** No Major Changes.

SALT LAKE CITY TERMINAL AREA CHART
41st Edition, 22 Oct 2009**OBSTRUCTIONS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****22 Oct 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****22 Oct 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****22 Oct 2009 – 17 Dec 2009** No Major Changes.

SAN DIEGO TERMINAL AREA CHART
59th Edition, 17 Dec 2009**OBSTRUCTIONS****17 Dec 2009** No Major Changes.**AIRPORTS****17 Dec 2009** No Major Changes.**NAVAIDS****17 Dec 2009** No Major Changes.**AIRSPACE****17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****17 Dec 2009** No Major Changes.**MISCELLANEOUS****17 Dec 2009** No Major Changes.

SAN FRANCISCO SECTIONAL
83rd Edition, 27 Aug 2009**OBSTRUCTIONS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****27 Aug 2009** No Major Changes.**22 Oct 2009** Change CTAF 122.95 to 122.9 at BROWNSVILLE arpt, 39°27'18"N, 121°17'29"W.**17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009** No Major Changes.**22 Oct 2009** Delete LAMPSON NDB, 38°59'43"N, 122°53'01"W.**17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 22 Oct 2009** No Major Changes.**17 Dec 2009** Add LITTLE RIVER, CA Class E: That airspace extending upward from 700 feet above the surface within a 6.6-mile radius of Little River Airport.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

SAN FRANCISCO TERMINAL AREA CHART**75th Edition, 27 Aug 2009****OBSTRUCTIONS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRPORTS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**WICHITA SECTIONAL****83rd Edition, 30 Jul 2009****OBSTRUCTIONS****27 Aug 2009** Add obst 2930' MSL (350' AGL) UC, 39°50'12"N, 100°10'48"W. Add obst 1665' MSL (310' AGL) UC, 37°57'55"N, 97°09'08"W. Add obst 2636' MSL (350' AGL) UC, 39°49'30"N, 99°35'27"W.
22 Oct 2009 Add obst 1641' MSL (238' AGL), 37°59'00"N, 96°52'21"W.

Add obst 1782' MSL (260' AGL), 37°56'06"N, 97°51'53"W.

Add obst 1604' MSL (314' AGL), 37°30'30"N, 97°11'19"W.

Add obst 2978' MSL (350' AGL) UC, 36°19'02"N, 100°15'34"W.

Add obst 3298' MSL (315' AGL) UC, 38°55'12"N, 101°11'02"W.

Add obst 1588' MSL (320' AGL) UC, 37°29'57"N, 97°30'51"W.

17 Dec 2009 Add obst 4645' MSL (350' AGL) UC, 38°49'03"N, 102°22'02"W.

Add obst 4549' MSL (350' AGL) UC, 39°03'34"N, 102°15'35"W.

Add obst 5259' MSL (350' AGL) UC, 37°22'54"N, 102°54'22"W.

Add obst 4300' MSL (350' AGL) UC, 37°22'52"N, 102°17'06"W.

Add obst 1620' MSL (310' AGL), 39°40'47"N, 96°45'01"W.

Add obst 1737' MSL (260' AGL), 37°53'35"N, 97°46'18"W.

Add obst 1947' MSL (310' AGL), 38°40'41"N, 97°58'53"W.

Add obst 1694' MSL (349' AGL) UC, 36°24'21"N, 98°21'05"W.

Add obst 2684' MSL (415' AGL) UC, 36°20'21"N, 99°32'08"W.

Add obst 2406' MSL (315' AGL) UC, 37°57'52"N, 99°06'48"W.

Add obst 3840' MSL (262' AGL) UC, 37°52'52"N, 102°00'15"W.

Add obst 3715' MSL (350' AGL) UC, 39°46'58"N, 101°22'34"W.

Add obst 1512' MSL (349' AGL) UC, 36°52'05"N, 97°36'27"W.

Add obst 2553' MSL (320' AGL) UC, 40°08'35"N, 99°49'29"W.

AIRPORTS**27 Aug 2009** No Major Changes.**22 Oct 2009** Change CTAF/UNICOM freq to 123.075 at STEARMAN arpt, 37°46'30"N, 97°06'47"W.**17 Dec 2009** No Major Changes.**NAVAIDS****27 Aug 2009 – 17 Dec 2009** No Major Changes.**AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**SPECIAL USE AIRSPACE****27 Aug 2009 – 17 Dec 2009** No Major Changes.**MILITARY TRAINING ROUTES****27 Aug 2009**

IR-526 Revised

IR-513 Revised

IR-504 Revised

22 Oct 2009 – 17 Dec 2009 No Major Changes.**MISCELLANEOUS****27 Aug 2009 – 17 Dec 2009** No Major Changes.

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private-use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

FACILITY NAME	CHART & PANEL
Frankfort, IL (LL40)	L-28H
Chicago App/Dep Con 133.1 285.6	
Glasgow Industrial, MT (Ø7MT)	H-1E, 2F, L-13D
Salt Lake Center App/Dep Con 126.85 305.2	
USAF Academy Bullseye Aux Airstrip, CO (C09Ø)	L-10F
ASOS 118.325	
West Kentucky Airpark, KY (5KY3)	L-16I
Memphis Center App/Dep Con 133.65 292.15	
William P Gwinn, FL (Ø6FA)	H-8I, L-23C
Gwinn Tower 120.4 279.25 (Mon-Fri 1300-2100Z†)	
Gnd Con 121.65 279.25	

CANADA

FACILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX)	H-1B, L-12F
ATIS 119.8 (1500-0700Z†)	
Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8	
Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500-0700Z†) Gnd Con 121.8	
MF 119.4 295.0 (0700-1500Z†) (Shape irregular to 4500')	
Amos/Magny, QC (CYEY)	H-11B
Montreal Center App/Dep Con 125.9	
Atikokan Muni, ON (CYIB)	L-14I
MF 122.3 (5 NM to 4500' No ground station)	
Barrie-Orillia (Lake Simcoe Rgnl), ON (CYLS)	H-11B, L-31D
AWOS 122.55 (Pvt)	
Toronto Center App/Dep Con 124.025	
Bar River, ON (CPF2)	L-31C
Toronto Center App/Dep Con 132.65	
Bathurst, NB (CZBF)	L-32J
Moncton Center App/Dep Con 134.25	
Boundary Bay, BC (CZBB)	H-1B, L-1E
ATIS 125.5 (1500-0700Z†)	
Vancouver App/Dep Con 132.3 363.8	
Tower 118.1 (Inner) 127.6 (Outer) (1500-0700Z†) Gnd Con 124.3	
MF 118.1 (0700-1500Z† to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500'.)	
Brampton, ON (CNC3)	L-31D
Toronto Trml App/Dep Con 119.3 253.1	
Brandon Muni, MB (CYBR)	H-2H
Winnipeg Center App/Dep Con 132.25 285.4	
MF 122.1 (5 NM to 4000')	
Brantford, ON (CYFD)	L-31D
Toronto Trml App/Dep Con 128.27	
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3)	L-32G
Montreal Center App/Dep Con 134.675	
Bromont, QC (CZBM)	L-32G
Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	
Burlington Airpark, ON (CZBA)	L-31D
Toronto Center App/Dep Con 119.3 253.1	
Castlegar, BC (CYCG)	H-1C
Vancouver Center App/Dep Con 134.2 227.3	
MF 122.1 (5 NM to 6500')	
Centralia/James T. Fld Muni, ON (CYCE)	H-10G, 11B, L-31D
Toronto Center App/Dep Con 135.30	
Charlottetown, PE (CYYG)	H-11E, L-32J
Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	
Chatham-Kent, ON (CNZ3)	H-10G, L-30G
Cleveland Center App/Dep Con 132.25	

FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3) Toronto Center App/Dep Con 124.02	H-11B, L-31D
Cornwall Rgnl, ON (CYCC) Boston Center App/Dep Con 135.25 377.1	L-32G
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3) Halifax Trml App/Dep Con 119.2	H-11E, L-32J
Digby, NS (CYID) Moncton Center App/Dep Con 123.9	L-32J
Downsview, ON (CYZD) Toronto Center App Con 133.4 Toronto Center Dep Con 133.4 MF 126.2 (1300-2300Z±, 3 NM to 1700')	H-11B, L-31E
Drummondville, QC (CSC3) Montreal Center App/Dep Con 132.35	L-32H
Earlton (Timiskaming Rgnl), ON (CYXR) MF 122.0 (5 NM to 3800') AWOS 128.6	H-11B
Elliot Lake Muni, ON (CYEL) Toronto Center App/Dep Con 135.4	L-31C
Fort Frances Muni, ON (CYAG) Minneapolis Center App/Dep Con 120.9	L-14H
Fredericton Intl, NB (CYFC) ATIS 127.55 Moncton Center App/Dep Con 124.3 135.5 270.8 Tower 119.0 (1200-2000Z, DT 1100-1900Z) Gnd Con 121.7 (Ltd hrs) MF 119.0 (2000-1200Z, DT 1900-1100Z 5 NM to 3500')	H-11E, L-32I
Goderich, ON (CYGD) Toronto Center App/Dep 135.3 266.3	H-11B, L-31D
Greenwood, NS (CYZX) ATIS 128.85 244.3 (1100-0000Z±) App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3 Gnd Con 133.75 289.4 Clncl Del 128.05 283.9	H-11E, L-32J
Grimsby Air Park, ON (CNZ8) Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31E
Halifax/Shearwater, NS (CYAW) ATIS 129.175 (Ltd hrs) App/Dep Con 119.2 Tower 119.0 126.2 340.2 360.2 (Ltd hrs) Gnd Con 121.7 250.1	H-11E, L-32J
Halifax/Stanfield Intl, NS (CYHZ) ATIS 121.0 Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 225.2 363.8 Tower 118.4 236.6 Gnd Con 121.9 275.8 Clncl Del 123.95 Apron Advisory 122.125	H-11E, L-32J
Hamilton, ON (CYHM) ATIS 128.1 Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0 Gnd Con 121.6	H-10H, 11B, L-11B
Kingston, ON (CYGK) Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z±) MF 122.5 (1115-0400Z± 5 NM to 3300')	H-11C, L-31E, 32F
Kitchener/Waterloo, ON (CYKF) ATIS 125.1 (1200-0400Z±) Toronto Trml App/Dep Con 128.275 Waterloo Tower 126.0 118.55 (1200-0400Z±) Gnd Con 121.8 MF 126.0 (0400-1200Z± 5 NM to 4000')	H-11B, L-31D
Lachute, QC (CSE4) Montreal Center App Con 124.65 132.85 268.3 Montreal Center Dep Con 132.85 268.3	L-32G
La Tuque, QC (CYLQ) Montreal Center App/Dep Con 134.5	H-11C
Langley, BC (CYNJ) ATIS 124.5 (1630-0230Z, DT 1530-0330Z) Victoria Trml 132.7 290.8 Tower 119.0 (1630-0230Z, DT 1530-0330Z) Gnd Con 121.9 MF 119.0 (0230-1630Z, DT 0330-1530Z 3 NM to 1900')	L-1E

FACILITY NAME	CHART & PANEL
Leamington, ON (CLM2) Cleveland Center App/Dep Con 132.45	L-30F
Lethbridge, AB (CYQL) ATIS 124.4 (1300-0545Z‡) Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	H-1D
Lindsay, ON (CNF4) Toronto Center App/Dep 134.25	L-31E, L-32F
Liverpool/South Shore Rgnl, NS (CYAU) Moncton Center App/Dep Con 123.9	L-32J
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡) Toronto Center App/Dep 135.3 135.625 Tower 119.4 125.65 (1120-0345Z‡) Gnd Con 121.9 MF 119.4 (0345-1120Z‡ 5 NM to 3000')	H-10G, 11B, L-30G, 31D
Manitowaning/Manitoulin East Muni, ON (CYEM) Toronto Center App/Dep 135.4 260.9	L-31C
Maniwaki, QC (CYMW) Montreal Center App/Dep Con 126.57	L-32G
Mascouche, QC (CSK3) MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the N shore of Riviere des Milles-Iles and 1 NM around Lac Agile Mascouche arpt.)	L-32G
Medicine Hat, AB (CYXH) AWOS 124.875 (0345-1245Z‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400')	H-1D
Midland/Huronina, ON (CYEE) Toronto Center App/Dep 124.025	L-31D
Miramichi, NB (CYCH) Moncton Center App/Dep Con 123.7	H-11E, L-32J
Moncton/Greater Moncton Intl, NB (CYQM) ATIS 128.65 App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8 Apron Advisory 122.075	H-11E, L-32J
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L-32G
Montreal Intl (Mirabel), QC (CYMX) ATIS 125.7 Montreal Center App Con 124.65 132.85 268.3 Montreal Dep Con 132.85 MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL) ATIS 133.7 Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3 Tower 119.9 267.1 Gnd Con 121.9 275.8 Clnc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 268.3 (W-NW-NE) VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/St-Hubert, QC (CYHU) ATIS 124.9 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) AWOS 124.9 Montreal Center App/Dep Con 125.15 268.3 St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar 0400-1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	H-11C, L-32G
Muskoka, ON (CYQA) AWOS 124.575 MF 122.3 (5 NM to 3900')	H-11B, L-31D
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 1330-0530Z‡ (5 NM to 2500')	H-1B, L-1E
North Bay, ON (CYYB) ATIS 124.9 (1130-0300Z‡) Toronto Center App/Dep 121.225 127.25 MF 118.3 (1130-0330Z‡ 7 NM to 5000')	H-11B, L31D
Oshawa, ON (CYOO) ATIS 125.675 (1130-0330Z‡) Toronto Trml App Con 133.4 Tower 120.1 (1130-0330Z‡) Gnd Con 118.4 Toronto Trml Dep Con 133.4 MF 120.1 (0330-1130Z‡ 5 NM to 3000')	L-31E

FACILITY NAME	CHART & PANEL
Ottawa/Carp, ON (CYRP) ATIS 121.15 Ottawa Trml App/Dep Con 128.175 252.5	L-31E, 32F
Ottawa/Gatineau, QC (CYND) Ottawa Trml App/Dep Con 127.7 128.175 252.5 MF 122.3 (5 NM shape irregular to 2500') VFR Advisory Ottawa Trml 127.7	H-11C, L-32G
Ottawa/MacDonald-Cartier Intl, ON (CYOW) ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 120.1 341.3 Gnd Con 121.9 Clnc Del 119.4 Ottawa Dep Con 128.175	L-11C
Owen Sound/Billy Bishop Rgnl, ON (CYOS) Toronto Center App/Dep 132.575 290.6	L-31D
Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0	L-30F
Pembroke, ON (CYTA) Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z†, OT PPR)	H-11C, L-31E, 32F
Penticton, BC (CYYF) Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100')	H-1B
Peterborough, ON (CYPQ) AWOS 126.925 Toronto Center App/Dep 134.25	H-11B, L-31E, 32F
Pincher Creek, AB (CZPC) Edmonton Center App/Dep Con 132.75 265.2	H-1D
Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z‡) Vancouver Center App Con 128.6 352.7 (Outer) Pitt Tower 126.3 (1500-0700Z‡) Gnd Con 123.8 Vancouver Center Dep Con 132.3 363.8 (South) MF 126.3 (0700-1500Z‡) (3NM to 2500')	L-1E
Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134.6 Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 (185.65 Quebec Twr VFR acft at or below 3000') Tower 118.65 236.6 Gnd Con 121.9 250.0	H-11D, L-32H
Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6	H-11D
Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9 MF 122.2 (5 NM to 4000')	H-11B
Saint John, NB (CYSJ) Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400')	H-11E, L-32J
Sarnia (Chris Hadfield), ON (CYZR) Toronto Center 134.375	H-10G, 11B, L-30F
Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z‡) Toronto Center App/Dep Con 132.65 344.5 Tower 118.8 (1300-0100Z‡) Gnd Con 121.7 MF 118.8 (0100-1300Z‡ 5 NM irregular shape to 3000')	H-2K, L-31B
Sherbrooke, QC (CYAM) AWOS 126.25 Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')	H-11D, L-32H
South Renfrew Muni, ON (CNP3) Montreal Center App/Dep 124.275	L-31E, 32F
Southport, MB (CYPG) ATIS 120.85 (Mon-Fri 1400-2300Z‡ except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z‡ except holidays) Gnd Con 121.7 275.8	H-2H

FACILITY NAME	CHART & PANEL
Springwater Barrie Airpark, ON (CNA3) Toronto Center App/Dep Con 124.025	L-31D
St. Catharines/Niagara District, ON (CYSN) ATIS 128.525 (1215-0200Z‡) Toronto Trml App/Dep Con 133.4 253.1 MF 123.25 (1215-0200Z‡ 5 NM to 3300')	H-10H, 11B, L-31E
St. Frederic, QC (CSZ4) Montreal Center App/Dep Con 135.025 270.9	L-32H
St. Georges, QC (CYSG) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM 3900' ASL)	H-32H, L-11D
St. Jean, QC (CYJN) Montreal Center App/Dep Con 125.15 268.3 Tower 118.2 (Apr-Oct 1230-0230Z‡ Nov-Mar 1300-0200Z‡) Gnd Con 121.7	L-32G
Sudbury, ON (CYSB) ATIS 127.4 Toronto Center App/Dep Con 135.5 MF 125.5 (7 NM to 4000')	H-31B, 10G, L-31D
Summerside, PE (CYSU) AWOS 122.55 (Pvt) Moncton Center App/Dep Con 124.4 384.8	H-11E, L-32J
Thunder Bay, ON (CYQT) ATIS 128.8 (1100-0400Z‡) Winnipeg Center App/Dep Con 132.125 (0400-1100Z‡) Tower 118.1 (1100-0400Z‡) Gnd Con 121.9 App/Dep 119.2 MF 118.1 (0400-1100Z‡ 5 NM to 4000')	H-2J, L-14J
Timmins, ON (CYTS) ATIS 124.95 (1000-0500Z‡) Toronto Center App/Dep Con 128.3 226.3 MF 122.3 (5 NM to 4000')	H-11B
Toronto/Buttonville Muni, ON (CYKZ) ATIS 127.1 (1200-0400Z‡) Toronto Center App Con 133.4 Toronto Center Dep Con 133.4 Tower 124.8 119.9 (1200-0400Z‡) Gnd Con 121.8 MF 124.8 (0400-1200Z‡ No gnd station. 5 NM shape irregular to below 2500')	L-31E
Toronto/City Centre, ON (CYTZ) ATIS 133.6 (1130-0400Z‡) App Con 133.4 Dep Con 133.4 Tower 118.2 119.2 (1130-0400Z‡) Gnd Con 121.7	L-31E
Toronto/Lester B Pearson Intl, ON (CYYZ) ATIS 120.825 App Con 124.475 125.4 132.8 Dep Con 127.575 128.8 Tower 118.35 118.7 Gnd Con 118.0 119.1 121.65 121.9 Clnc Del 121.3 (1200-0400Z‡) VFR Advisory 119.3 133.4	H-11B, L-31D
Trenton, ON (CYTR) ATIS 135.45 257.7 App/Dep Con 128.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8 Clnc Del 124.35 286.4	H-11C, L-31E, 32F
Trenton/Mountain View, ON (CPZ3) Trenton Mil Advisory 268.0	H-11C, L-31E, 32F
Trois-Rivieres, QC (CYRQ) Montreal Center App/Dep Con 128.225 229.2 MF 123.0 (5 NM to 3200')	H-11C, L-32H
Val-d'Or, QC (CYVO) Montreal Center App/Dep Con 125.9 308.3 MF 118.5 (1030-0325Z‡ 5 NM to 4000')	H-11B
Vancouver Intl, BC (CYVR) ATIS 124.6 124.75 App Con 128.6 128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner) Dep Con 126.125 (north) 132.3 (south) 363.8 Tower 118.7 (south) 119.55 (north) VFR 124.0 125.65 226.5 236.6 Gnd Con 121.7 (south) 127.15 (north) 275.8 Clnc Del 121.4	H-1B, L-1E

FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ) ATIS 118.8 (1400-0800Z) App Con 125.95 308.4 Dep Con 133.85 308.4 Tower 119.1 (Outer) 119.7 (Inner) 239.6 Gnd Con 121.9 361.4 (1400-0800Z) OT ctc Kamloops 119.7 Clncl Del 126.4 (1400-0800Z)	H-1B, L-1E
Victoriaville, QC (CSR3) Montreal Center App Con 132.35	L-32H
Waterville/Kings Co Muni, NS (CCW3) Greenwood Trml App/Dep Con 120.6 335.9 Greenwood Tower 119.5 324.3	L-32J
Warton, ON (CYVW) Toronto Center App/Dep Con 132.575 MF 122.2 (5 NM to 3700')	H-11B, L-31D
Windsor, ON (CYQG) ATIS 134.5 (1130-0330Z) Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2 Tower 124.7 (1130-0330Z) Gnd Con 121.7 MF 124.7 (0330-1130Z) 6 NM irregular shape to below 3000' VFR Advisory Detroit App Con 134.3	H-10G, L-8J
Yarmouth, NS (CYQI) Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	H-11E, L-32I

MEXICO

FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS) Juarez App Con 119.9 Juarez Tower 118.9	H-4K, L-6F
Del Norte Intl (MMAN) ATIS 127.55 (1300-0300Z) Monterrey App 119.75 120.4 Tower 118.6	H-7B, L-20G
Durango Intl (MMDO) ATIS 132.1 Tower 118.1 Durango Info 122.3	H-7A
General Abelardo L Rodriguez Intl (MMTJ) ATIS 127.9 Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Clncl Del 122.35 Tijuana Info 132.1	H-4H, L-4H
General Lucio Blanco Intl (MMRX) Reynosa App Con 118.8 Reynosa Tower 118.8	H-7B, L-20H
General Mariano Escobedo Intl (MMMY) ATIS 127.7 Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	H-7B, L-20G
General R Fierro Villalobos Intl (MMCU) ATIS 127.9 Chihuahua App Con 121.0 Chihuahua Tower 118.4	L-6I
General Rodolfo Sanchez Taboada Intl (MMML) ATIS 127.6 Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	H-4H, L-4J, 5A
General Servando Canales (MMMA) Matamoros App Con 118.0 Matamoros Tower 118.0	H-7C, L-21A
Plan De Guadalupe Intl (MMIO) Saltillo App Con 127.4 Saltillo Tower 118.4	H-7B
Quetzalcoatl Intl (MMNL) Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3	H-7B, L-20G
Torreon Intl (MMTC) App Con 119.6 Tower 118.5	H-7A






In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams have been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city and airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in ground taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedures Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.

NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current than the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION


PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Available pilot controlled lighting (PCL) systems are indicated as follows:

1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., , , .
2. Approach lighting systems that do not bear a system identification are indicated with a negative "0" beside the name. A star (★) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., 0★. To activate lights use frequency indicated in the communication section of the chart with a 0 or the appropriate lighting system identification e.g., UNICOM 122.8 0, , .

<u>KEY MIKE</u>	<u>FUNCTION</u>
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

CHART CURRENCY INFORMATION



The Chart Date identifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.

MISCELLANEOUS

- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.


09071

LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM

Runways



ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.

uni-directional bi-directional Jet Barrier

ARRESTING SYSTEM

REFERENCE FEATURES

Buildings.....	■
Tanks.....	●
Obstructions.....	▲
Airport Beacon #.....	☆
Runway.....	▼
Radar Reflectors.....	▲
Control Tower #.....	■
Hot Spot	○

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A **D** symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g.,

RWY 14-32 S75, T185, ST175, TT325

PCN 80 F/D/X/U

Helicopter Alighting Areas
Negative Symbols used to identify Copter Procedures landing point.....

Runway Threshold elevation.....THRE 123

Runway TDZ elevation.....TDZE 123

Runway Slope..... 0.3% DOWN

(shown when runway slope is greater than or equal to 0.3%)

NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.


True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

Positional accuracy within ±600 feet unless otherwise noted on the chart.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

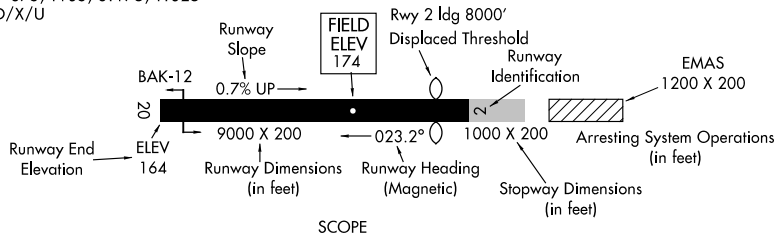

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

HOT SPOTS

An "Airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on a airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles designated as "HOT¹", "HOT²", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION
ARIZONA		
MESA FALCON FLD (FFZ)	HOT ¹	Acft approaching Twy D from the ramp and destined for Rwy 4R or Rwy 22L sometimes miss the turn into Twy D.
TUCSON RYAN FLD (RYN)	HOT ¹	Air traffic often taxies acft via Twy B and onto Rwy 33 for departure on Rwy 6R. Use caution not to enter Rwy 6R without ATC authorization.
TUCSON TUCSON INTL (TUS)	HOT ¹	Complex intersection.
	HOT ²	Pilots instructed to hold short of Rwy 11L–29R or Rwy 11R–29L sometimes cross the approach area of these rwy's without authorization.
	HOT ³	Rwy 29R sometimes mistaken for Rwy 29L.
CALIFORNIA		
HAYWARD HAYWARD EXECUTIVE (HWD)	HOT ¹	Acft approaching Twy A from the ramp sometimes fail to turn onto Twy A, proceeding onto Twy E and ultimately Rwy 10L–28R.
	HOT ²	Area not visible from ATCT.
	HOT ³	Area not visible from ATCT.
LONG BEACH LONG BEACH DAUGHERTY FLD (LGB)	HOT ¹	Acft exiting Rwy 30 at Twy A turn left on Twy D, anticipate reaching their destination, and fail to hold short of Rwy 7L–25R.
	HOT ²	Acft northbound on Twy B and instructed to hold short of Rwy 12–30 at Twy K sometimes miss the turn onto Twy K and proceed straight ahead onto Rwy 12–30 and Rwy 7L–25R.
	HOT ³	Acft southbound on Twy B anticipate reaching their destination parking ramp and fail to hold short of Rwy 7R–25L.
	HOT ⁴	Acft eastbound on Twy J instructed to taxi to Rwy 25L at Twy D sometimes miss the turn onto Twy D and proceed onto Rwy 12–30 without authorization.
	HOT ⁵	Acft taxiing to Rwy 16R from the southwest ramp sometimes miss the left turn onto Twy B, continue eastbound onto Twy F, and enter Rwy 16R–34L.
	HOT ⁶	After completing a run-up on inactive Rwy 34R, aircraft sometimes fail to hold short of Rwy 7R–25L.
	HOT ⁷	Acft landing Rwy 30, be aware that this rwy crosses every other rwy at the airport. When exiting, pilots should ensure they are following a yellow, "lead-off" line onto a rwy.
MERDED CASTLE (MER)	HOT ¹	Complex area. Verify correct taxi route. Areas south of Twy A and Twy G are private ramp.
	HOT ²	Traffic congestion due to large volume of aircraft proceeding to and from Rwy 31.

OAKLAND METROPOLITAN OAKLAND INTL (OAK)	HOT ¹	Twy A and Twy B both cross Rwy 27R. Pilots sometimes mistake Twy A for Twy B, and vice versa. Verify correct taxi route.
	HOT ²	Acft departing the ramp sometimes miss their turn onto Twy C or Twy D, mistakenly proceeding onto Twy H or Twy G and ultimately Rwy 9L–27R.
	HOT ³	Complex intersection. Pilots sometimes taxi onto Rwy 9L or Rwy 33 by mistake.
PALM SPRINGS PALM SPRINGS INTL (PSP)	HOT ¹	Pilots sometimes mistake Twy C for Rwy 13R–31L or Rwy 13L–31R.
	HOT ²	Pilots instructed to taxi to Rwy 13R via Twy B and Twy C sometimes miss the turn onto Twy C and proceed onto Rwy 31R without authorization.
	HOT ³	Pilots approaching Rwy 31R on Twy B sometimes fail to hold short of Rwy 31R.
SALINAS SALINAS MUNI (SNS)	HOT ¹	Acft instructed to taxi from the ramp to Rwy 31 sometimes miss the turn onto Twy A and continue along Twy E, subsequently entering Rwy 31 without ATC authorization.
	HOT ²	Acft instructed to taxi from the ramp to Rwy 26 sometimes miss the turn onto Twy C and continue along Twy A, subsequently entering Rwy 26 at Twy A without ATC authorization.
SAN FRANCISCO SAN FRANCISCO INTL (SFO)	HOT ¹	Pilots instructed to follow Twy B south sometimes continue onto Twy J or Twy F by mistake.
	HOT ²	Pilots taxiing east on Twy C and instructed on turn right onto Twy E sometimes miss the turn onto Twy E and continue across Rwy 1L–19R by mistake.
SAN JOSE NORMAN Y. MINETA SAN JOSE INTL (SJC)	HOT ¹	Pilots assigned Rwy 29 for landing sometimes land Rwy 30L by mistake. Pilots proceeding into, or exiting, the Rwy 29 run-up area sometimes enter Rwy 29 without ATC authorization.
SANTA ANA JOHN WAYNE AIRPORT/ORANGE CO (SNA)	HOT ¹	ATC often instructs pilots to “Taxi up to and hold short” of Rwy 19L and Rwy 19R. As with normal hold short instruction, one must always stop short of the Runway Holding Position Markings.
	HOT ²	Pilots exiting Rwy 19R or Rwy 19L onto Twy H: short distance between rws. Expect to hold short of the parallel rwy. Manage your taxi speed. Do not cross the Runway Holding Position Markings for the parallel rwy without ATC authorization.
	HOT ³	Pilots taxiing via Twy A, Twy H, and Twy C sometimes miss the turn from Twy H to Twy C.
SANTA BARBARA SANTA BARBARA MUNI (SBA)	HOT ¹	Pilots are sometimes confused by the angle at which Twy C intersects Rwy 7–25.
	HOT ²	Very wide pavement area. Do not cross Rwy 15L or Rwy 15R without authorization.
	HOT ³	ATC often utilizes Rwy 15L–33R and Rwy 15R–33L to taxi arriving aircraft off of Rwy 7–25.
	HOT ⁴	Pilots instructed to taxi to Rwy 35 sometimes miss the turn onto Twy J, not realizing that the approach end of Rwy 25 begins at Twy J.

COLORADO

DENVER CENTENNIAL (APA)	HOT ¹	Intersection Twy A–1. Hold line across run-up area.
	HOT ²	Twy A–4 and B–4 cross Rwy 17L at touchdown zone. Twy A, Twy A–8, Twy A–9 and Twy C–1 congested intersections. Twy C–1 and Twy D–1 close proximity to Rwy 10.

DENVER ROCKY MOUNTAIN METROPOLITAN (BJC)	HOT ¹	Frequent helicopter operations on north ends of Twy B and Rwy 02–20. Use caution in this area.
EAGLE EAGLE COUNTY RGNL (EGE)	HOT ¹	High density parking area on ramp east of Twy C–2. Air carrier aircraft should not leave or enter taxiway A east of Twy C–2.

NEVADA

LAS VEGAS MC CARRAN INTL (LAS)	HOT ¹	Exiting the ramp, use caution at Twy S not to cross the rwy holding position markings for Rwy 19L. Twy S intersects with Twy D, Twy Z, and Twy G, which require a turn to the north or south.
	HOT ²	Exiting Rwy 1R–19L use caution not to enter Twy U, and avoid entering Rwy 1L–19R without authorization.
	HOT ³	Exiting Rwy 1R–19L use caution not to enter Twy Y, and avoid entering Rwy 1L–19R without authorization.
	HOT ⁴	Rwy holding position markings for Rwy 7L and Rwy 1L are co-located, and located north of Rwy 7L. Verify rwy heading and alignment with proper rwy prior to departure.
	HOT ⁵	Twy E is often misidentified as a rwy. Verify rwy markings prior to departure.
LAS VEGAS NORTH LAS VEGAS (VGT)	HOT ¹	ATC often requires Rwy 12R departures to hold short of Rwy 7. Common mistake is to cross Rwy 7 without ATC authorization.
	HOT ²	Pilots sometimes enter or cross Rwy 12R without authorization.
	HOT ³	Pilots taxiing east on Twy A and destined for Rwy 30L sometimes miss the turn onto Twy B, proceeding onto Rwy 12R without ATC authorization.
	HOT ⁴	Pilots taxiing east on Twy A sometimes fail to hold short of Rwy 12L, or neglect to turn onto Rwy 12L for departure, instead departing on Twy A.
RENO RENO/TAHOE INTL (RNO)	HOT ¹	Pilots departing the southwest ramp and instructed to hold short of Rwy 7–25 sometimes fail to comply.
	HOT ²	Pilots northbound on Twy C sometimes proceed straight ahead into the ramp by mistake.
	HOT ³	Full length departures for Rwy 16L sometimes turn left at Twy D by mistake.

UTAH

SALT LAKE CITY SALT LAKE CITY INTL (SLC)	HOT ¹	Caution do not cross hold line for Rwy 35 during taxi SE on Rwy 14–32. Hold line is on north side of Rwy 32 numbers.
	HOT ²	Possible confusion between ramp, twy and rwy due to large paved area. Do not cross rwy hold lines without ATC clearance. ATC clearance is needed to enter the movement area, which is immediately west of vehicle drive lanes and marked by movement/nonmovement boundary line.


09351

AIRPORT DIAGRAM

AL-12 (FAA)

ALBUQUERQUE INTL SUNPORT (ABQ)

ALBUQUERQUE, NEW MEXICO

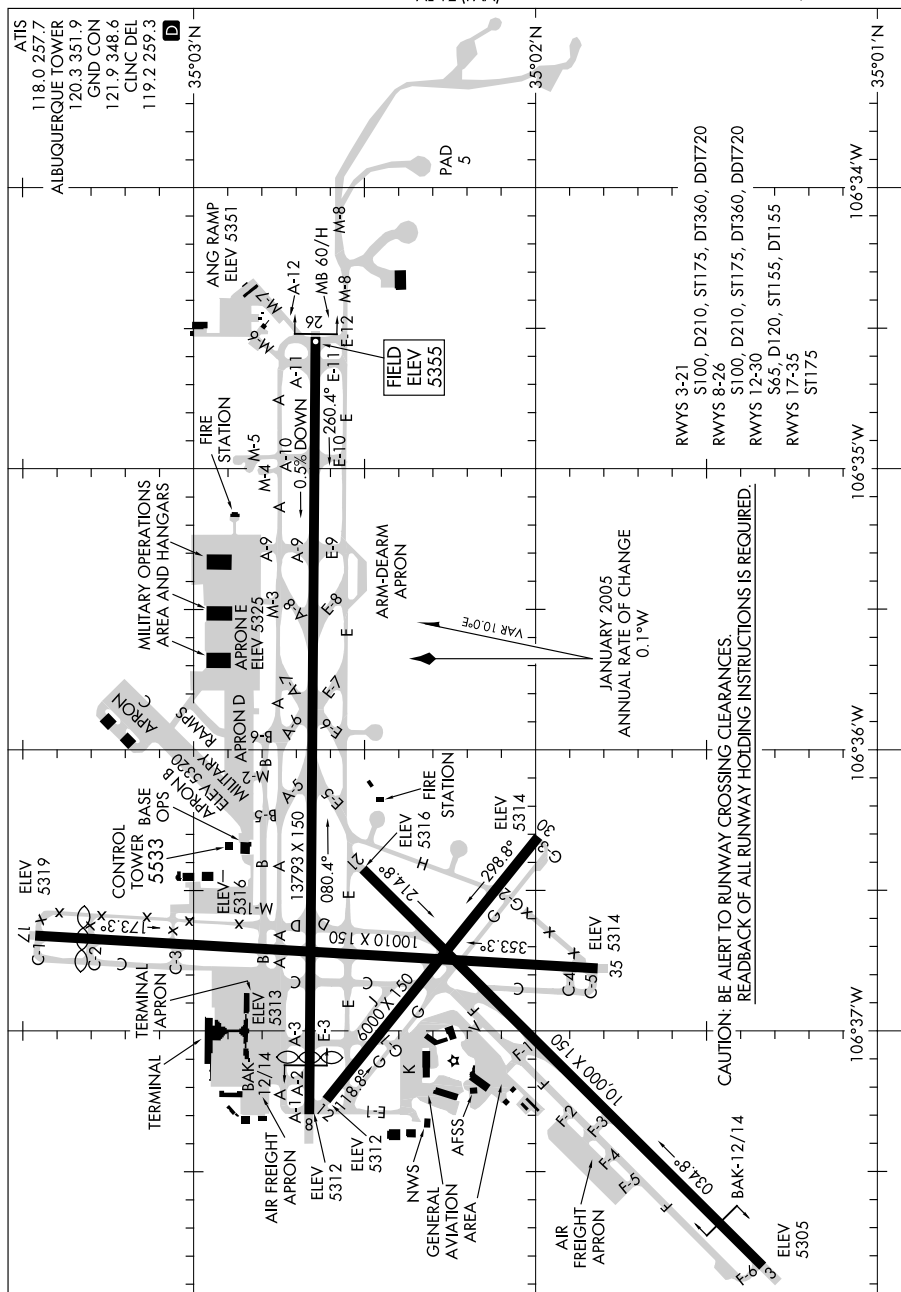

AIRPORT DIAGRAM

09351

ALBUQUERQUE, NEW MEXICO
ALBUQUERQUE INTL SUNPORT (ABQ)


09295

AIRPORT DIAGRAM

ASPEN-PITKIN COUNTY/SARDY FIELD (A5E)

AL-5889 (FAA)

ASPEN, COLORADO

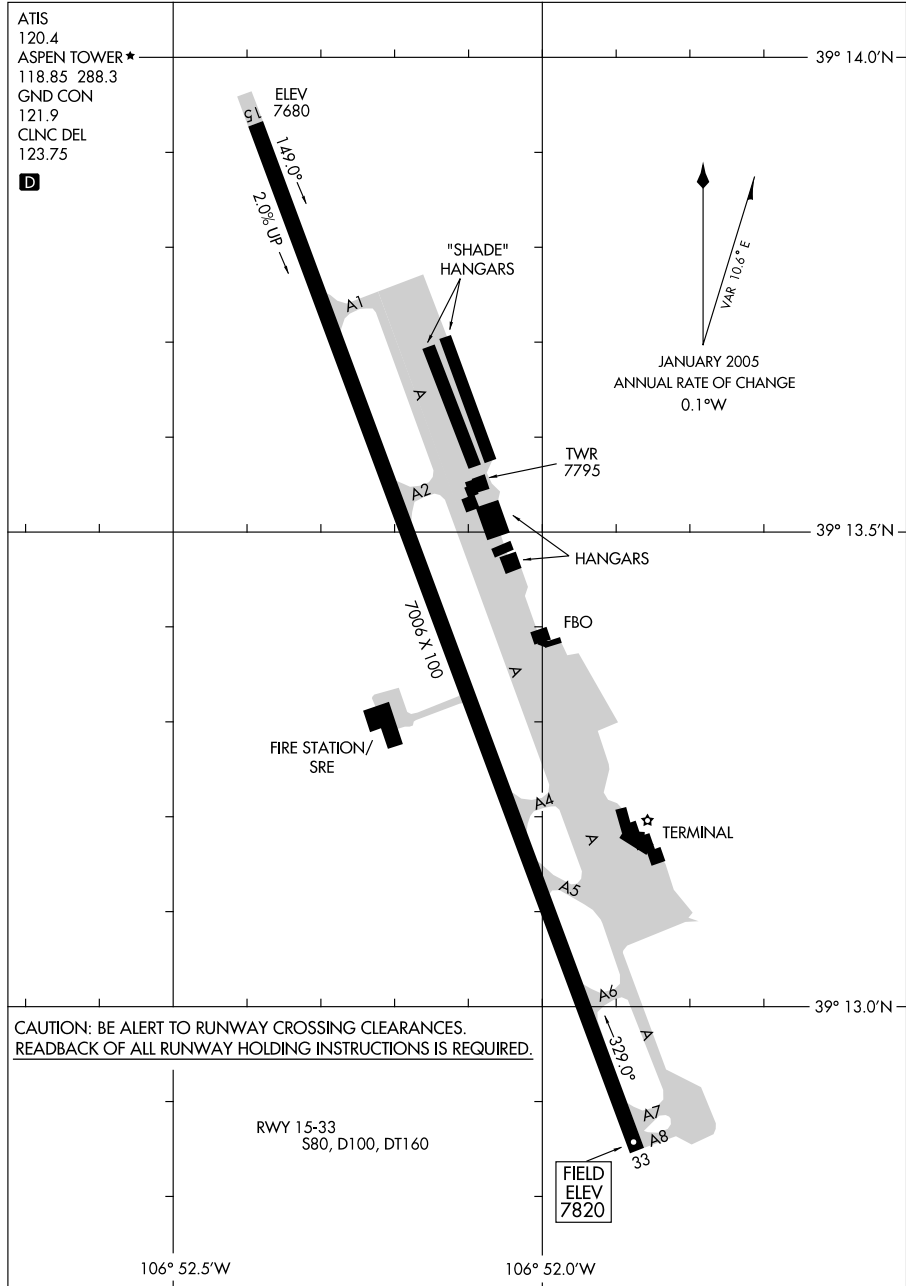

AIRPORT DIAGRAM

09295

ASPEN, COLORADO

ASPEN-PITKIN COUNTY/SARDY FIELD (A5E)


09127

AIRPORT DIAGRAM

AL-36 (FAA)

BAKERSFIELD/MEADOWS FIELD (BFL)

BAKERSFIELD, CALIFORNIA

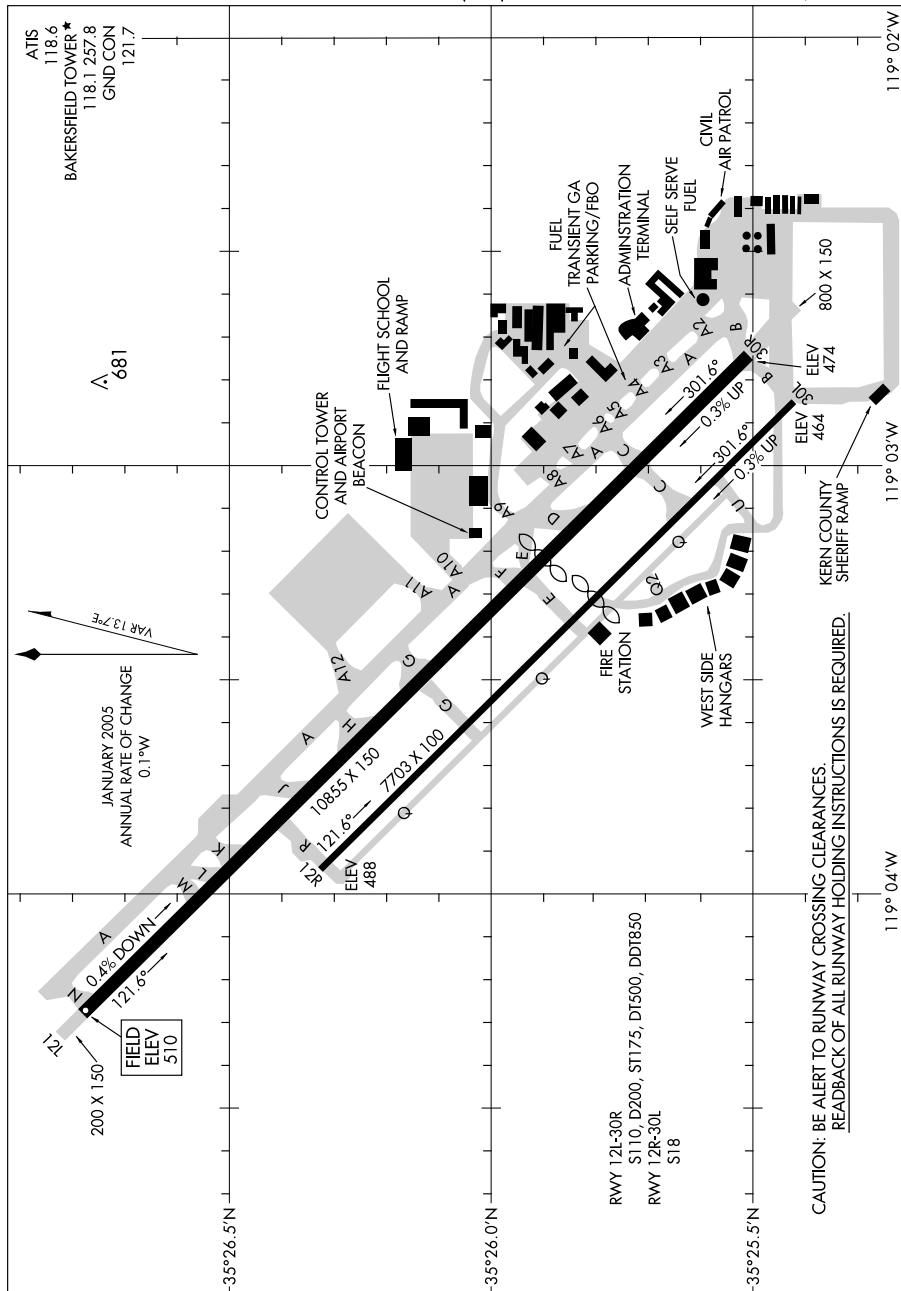

AIRPORT DIAGRAM

09127


BAKERSFIELD, CALIFORNIA
BAKERSFIELD/MEADOWS FIELD (BFL)

09127

AIRPORT DIAGRAM

[USAF] AFD-771

BEALE AFB (KBAB)
MARYSVILLE, CALIFORNIA

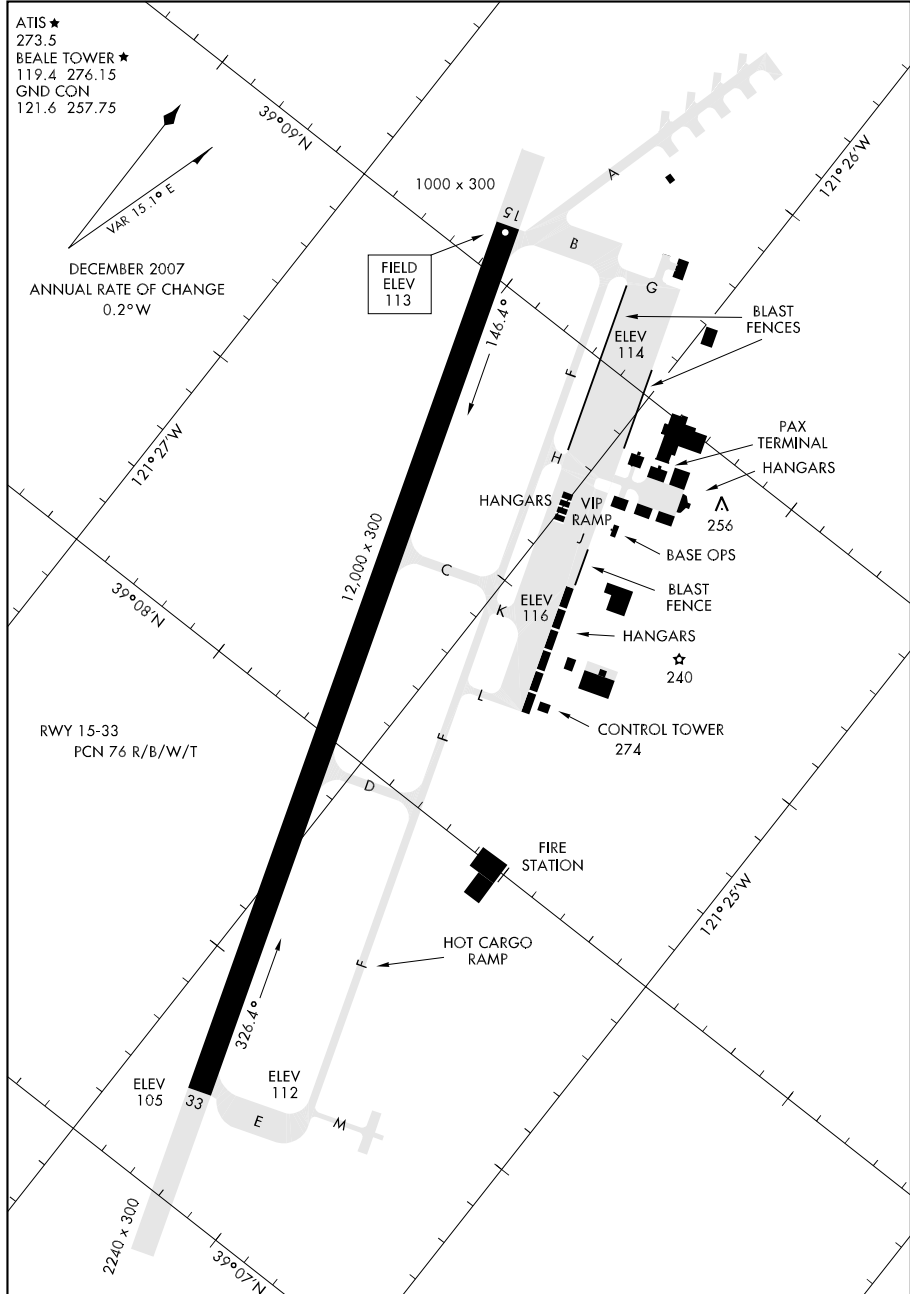

AIRPORT DIAGRAM

MARYSVILLE, CALIFORNIA
BEALE AFB (KBAB)


08269

AIRPORT DIAGRAM

AFD 538 [USAF]

BUCKLEY AFB (KBKF)

AURORA, COLORADO

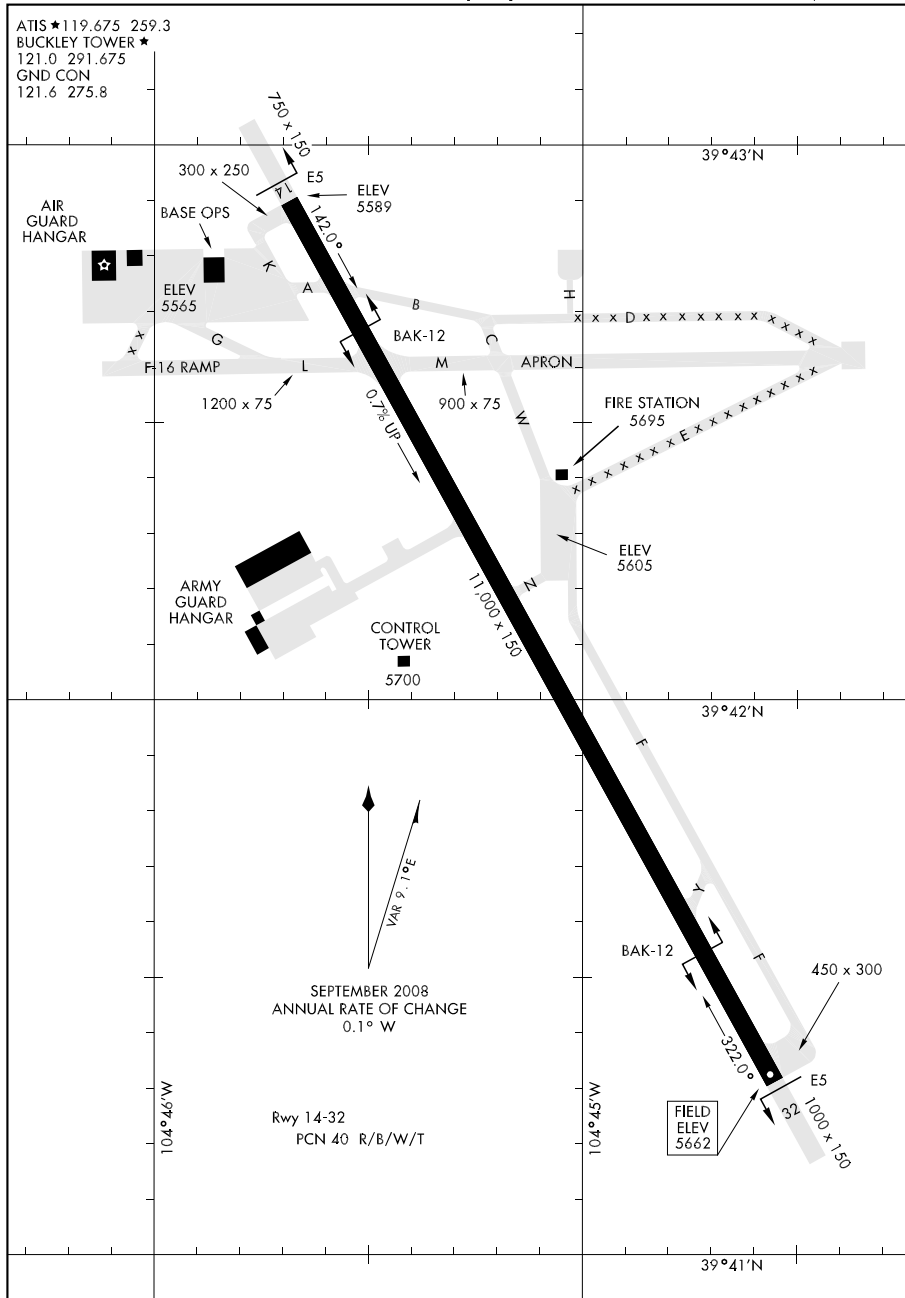


AIRPORT DIAGRAM

AURORA, COLORADO

BUCKLEY AFB (KBKF)

09295

AIRPORT DIAGRAM

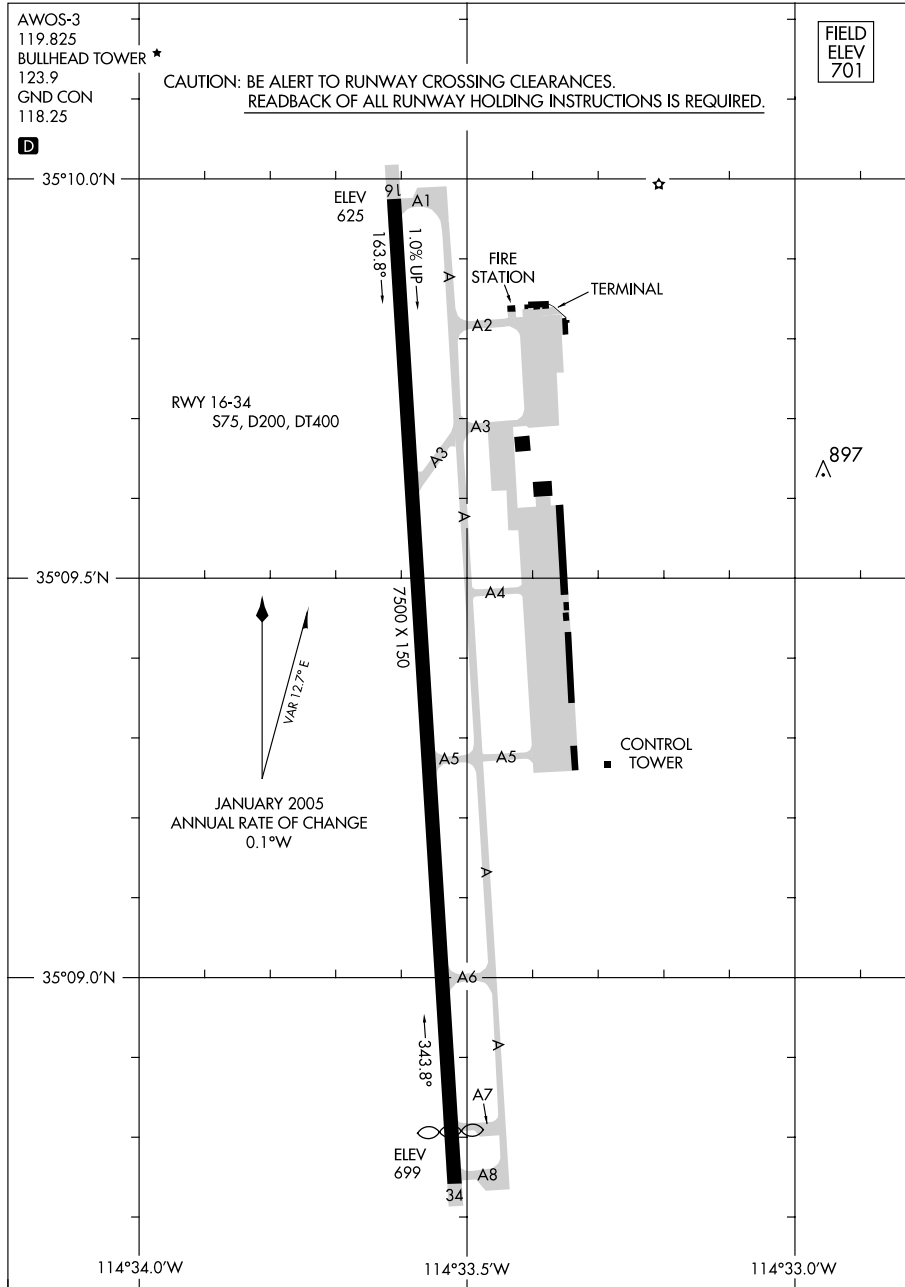BULLHEAD CITY/ LAUGHLIN/ BULLHEAD INTL (IFP)
AL-6967 (FAA) BULLHEAD CITY, ARIZONA


AIRPORT DIAGRAM

09295

BULLHEAD CITY, ARIZONA
BULLHEAD CITY/ LAUGHLIN/ BULLHEAD INTL (IFP)

09239

AIRPORT DIAGRAM

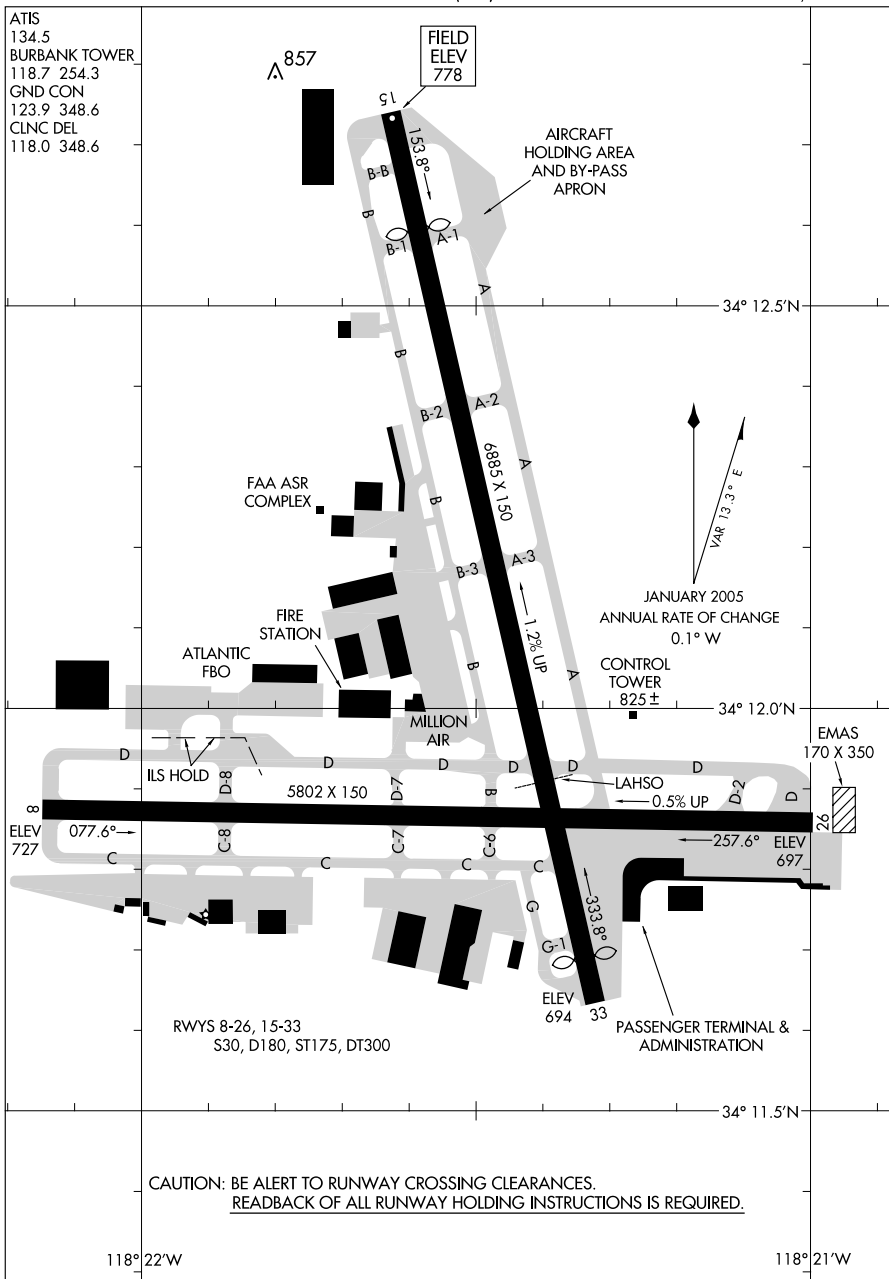BURBANK/ BOB HOPE (BUR)
BURBANK, CALIFORNIA

AIRPORT DIAGRAM

09239


BURBANK, CALIFORNIA
BURBANK/ BOB HOPE (BUR)

08157

AIRPORT DIAGRAM

AL-680 (FAA)

CAMARILLO (CMA)
CAMARILLO, CALIFORNIA

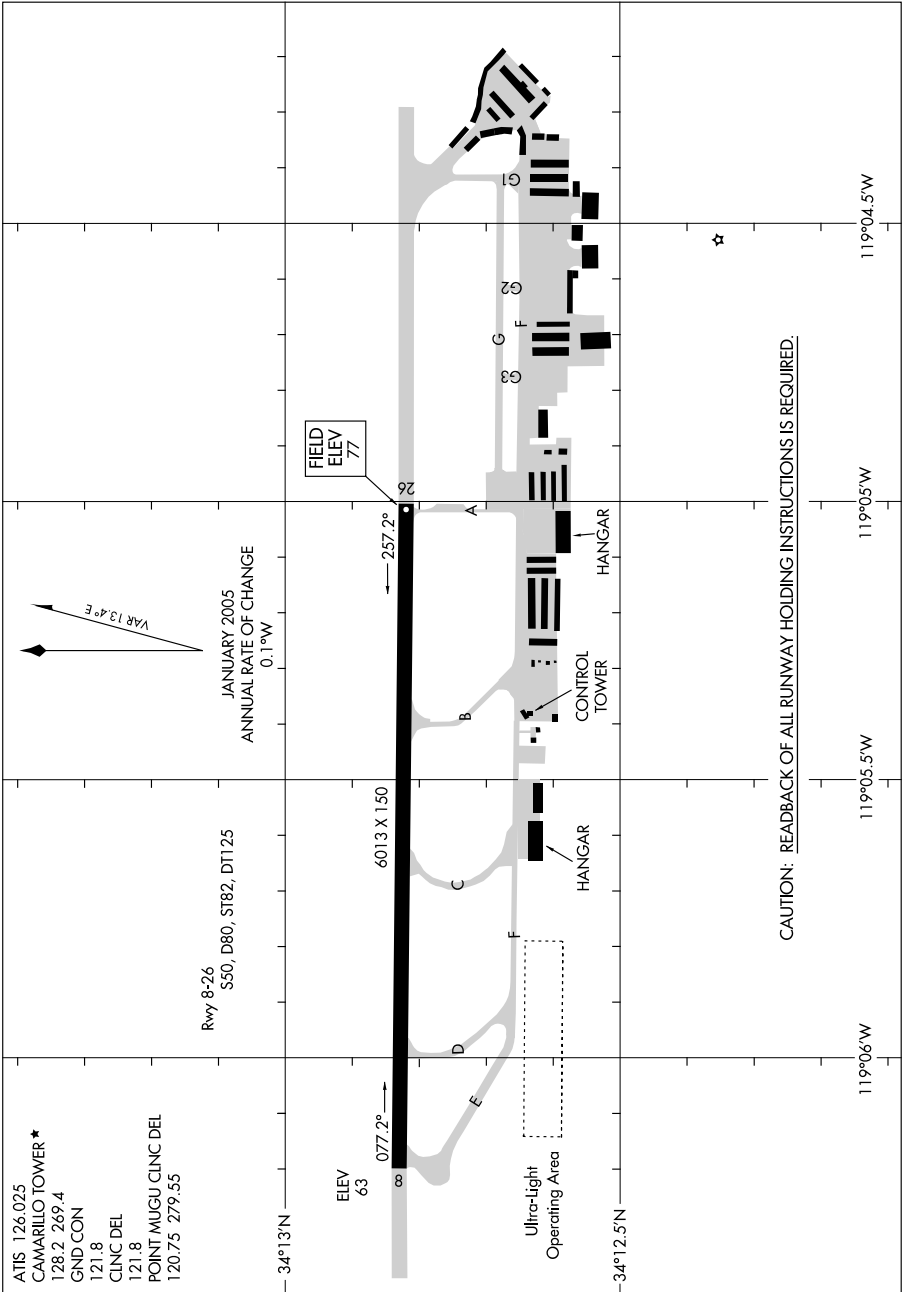

AIRPORT DIAGRAM

08157

CAMARILLO, CALIFORNIA
CAMARILLO (CMA)


09239

CAMP PENDLETON MCAS (MUNN FIELD) (KNFG)

AIRPORT DIAGRAM

AFD-5985 [USN]

OCEANSIDE, CALIFORNIA

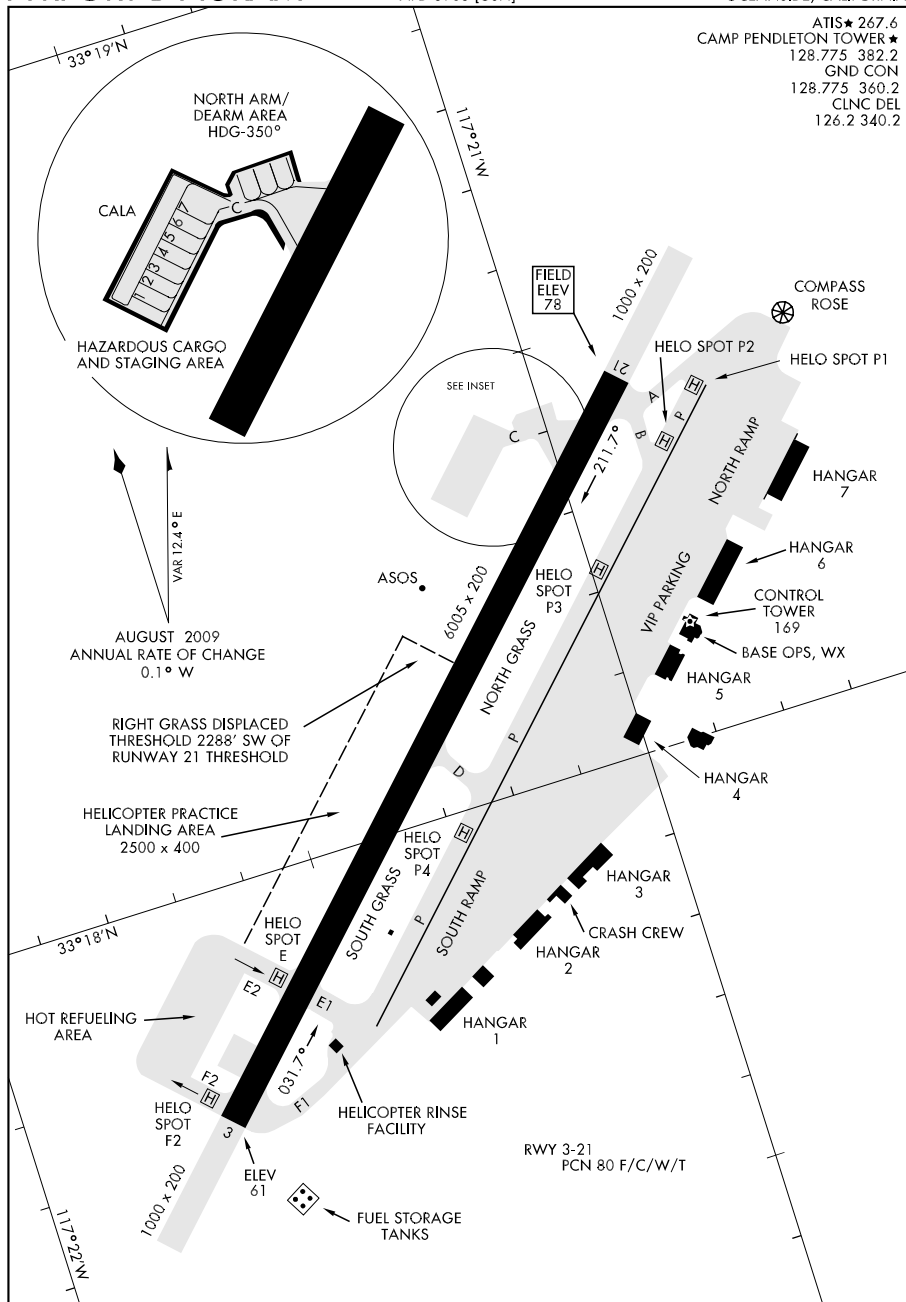

AIRPORT DIAGRAM

OCEANSIDE, CALIFORNIA

CAMP PENDLETON MCAS (MUNN FIELD) (KNFG)

09015


AIRPORT DIAGRAM

AFD-512 [USAF]

CANNON AFB (KCVS)

CLOVIS, NEW MEXICO


ATIS ★ 119.1 269.9
 CANNON TOWER ★
 120.4 270.25
 GND CON
 121.9 275.8
 CLNC DEL
 120.2 293.225

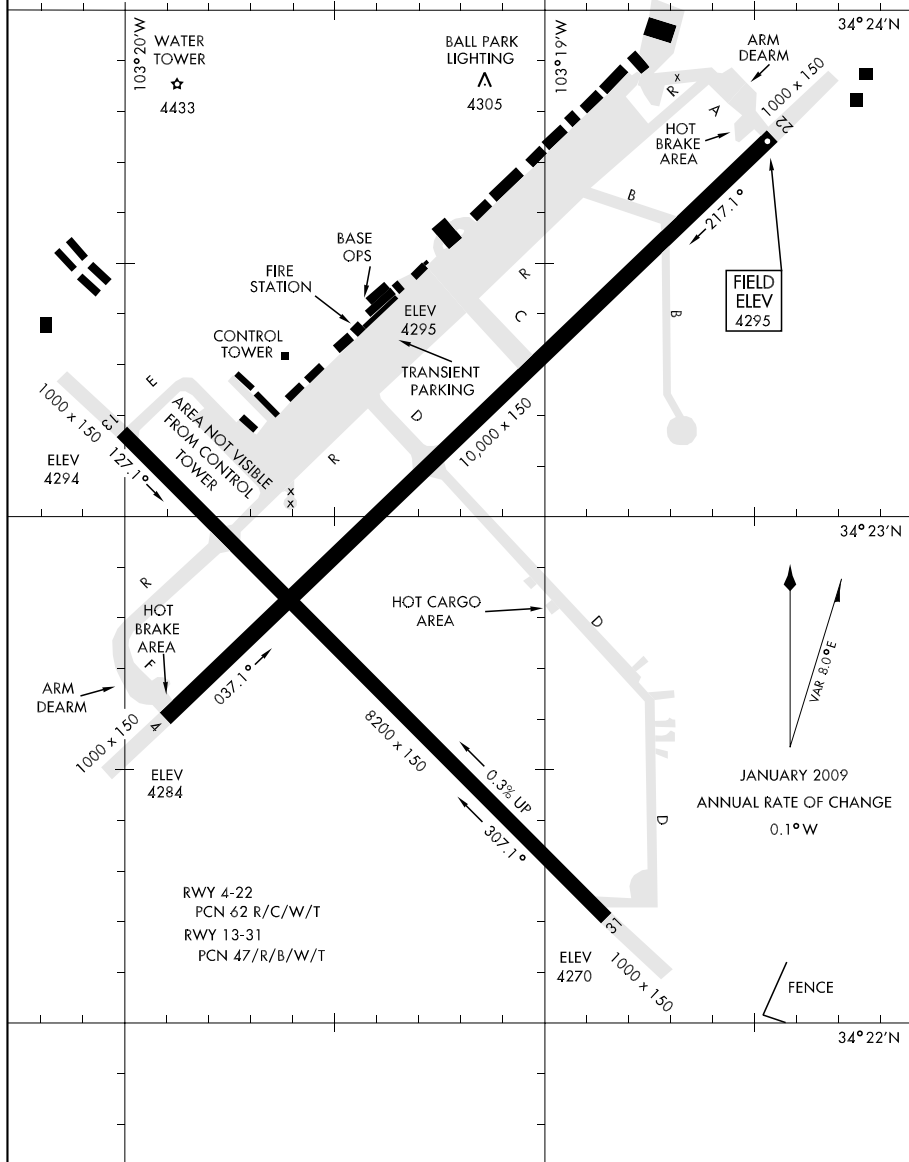

AIRPORT DIAGRAM

WGS-84 DATUM

CLOVIS, NEW MEXICO
 CANNON AFB (KCVS)

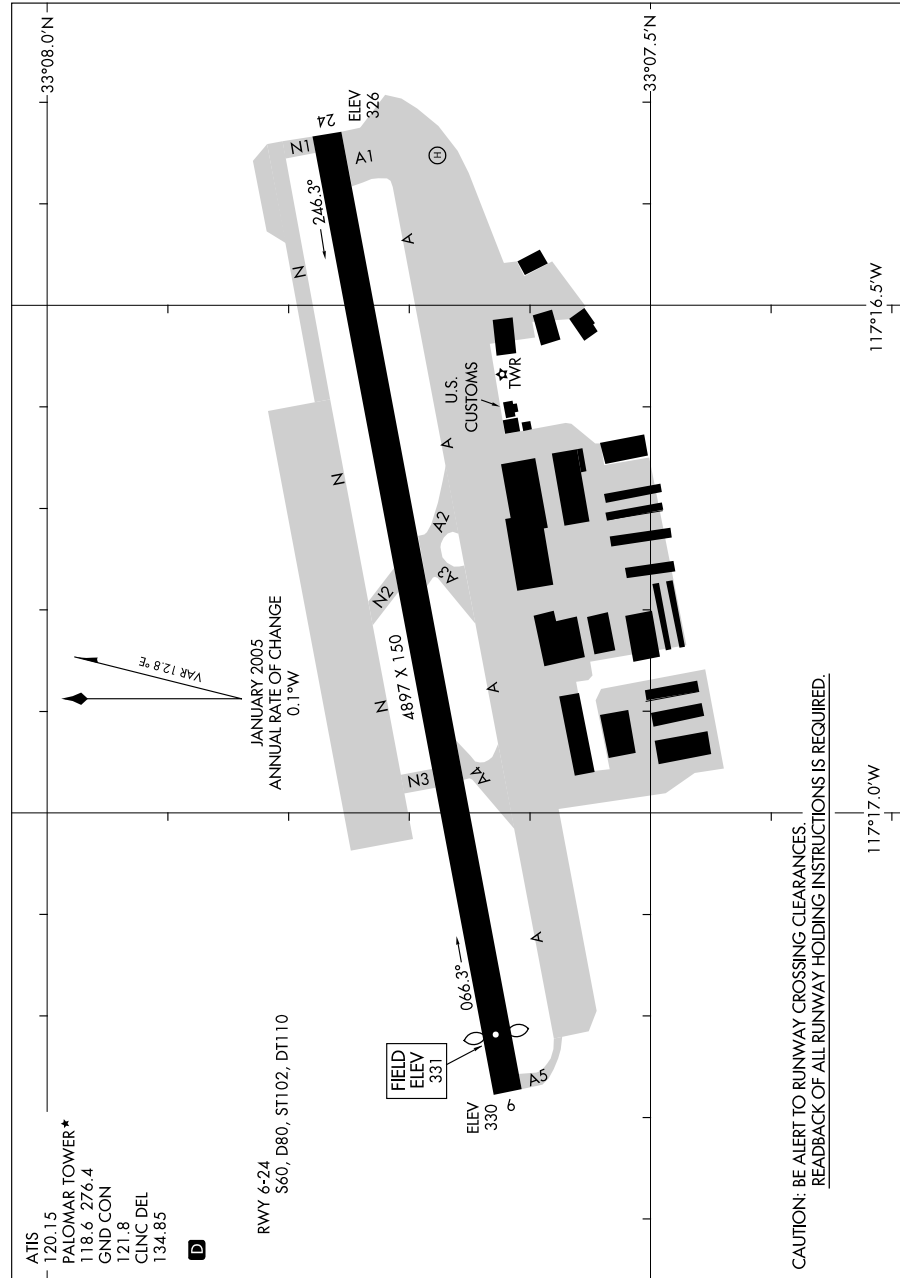


08101

AIRPORT DIAGRAM

AL-6494 (FAA)

CHANDLER MUNI (CHD)
CHANDLER, ARIZONA

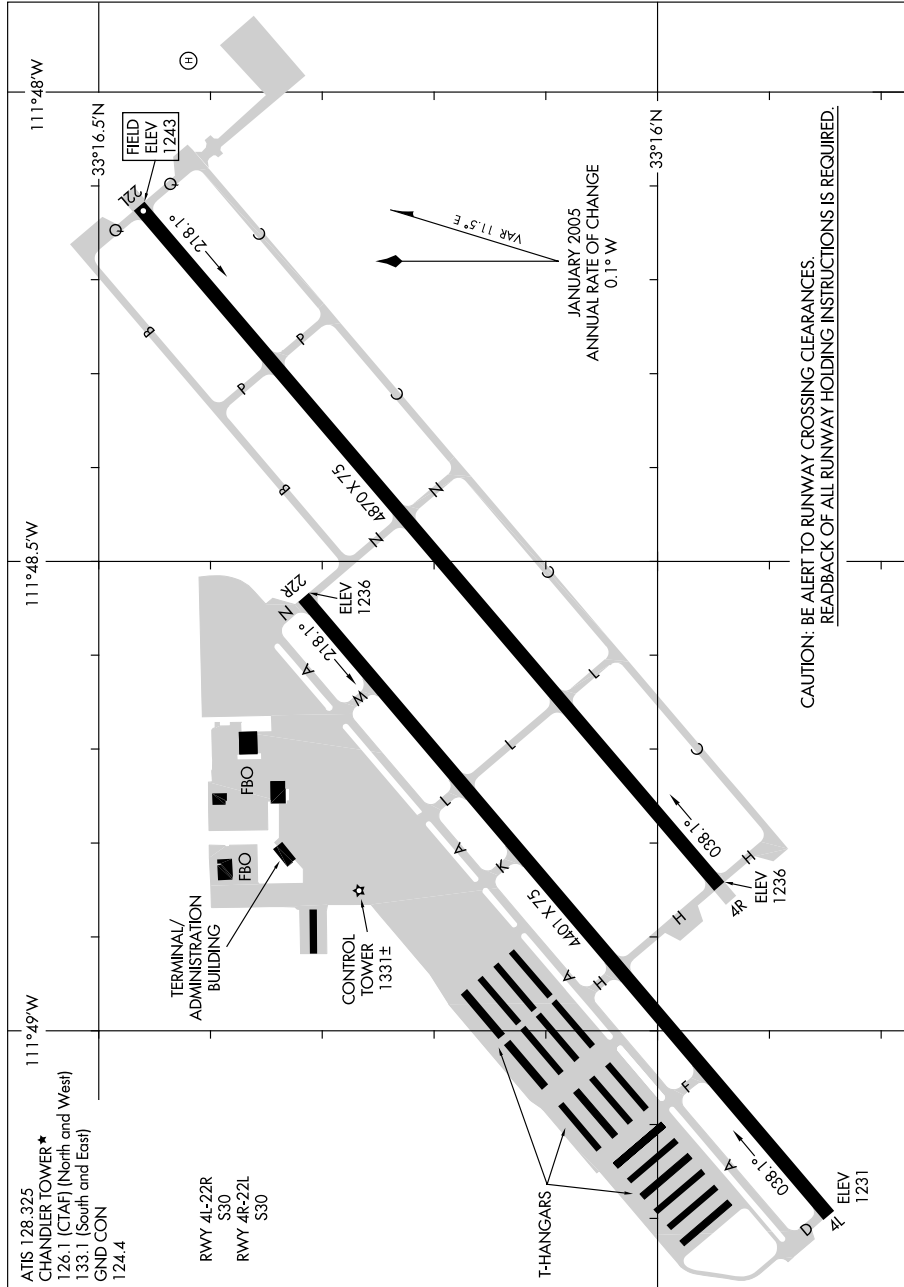

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM

08101

CHANDLER, ARIZONA
CHANDLER MUNI (CHD)


RIDGECREST, CALIFORNIA



09351

AIRPORT DIAGRAM

COLORADO SPRINGS/CITY OF COLORADO SPRINGS MUNI (COS)
AL-87 (FAA) COLORADO SPRINGS, COLORADO

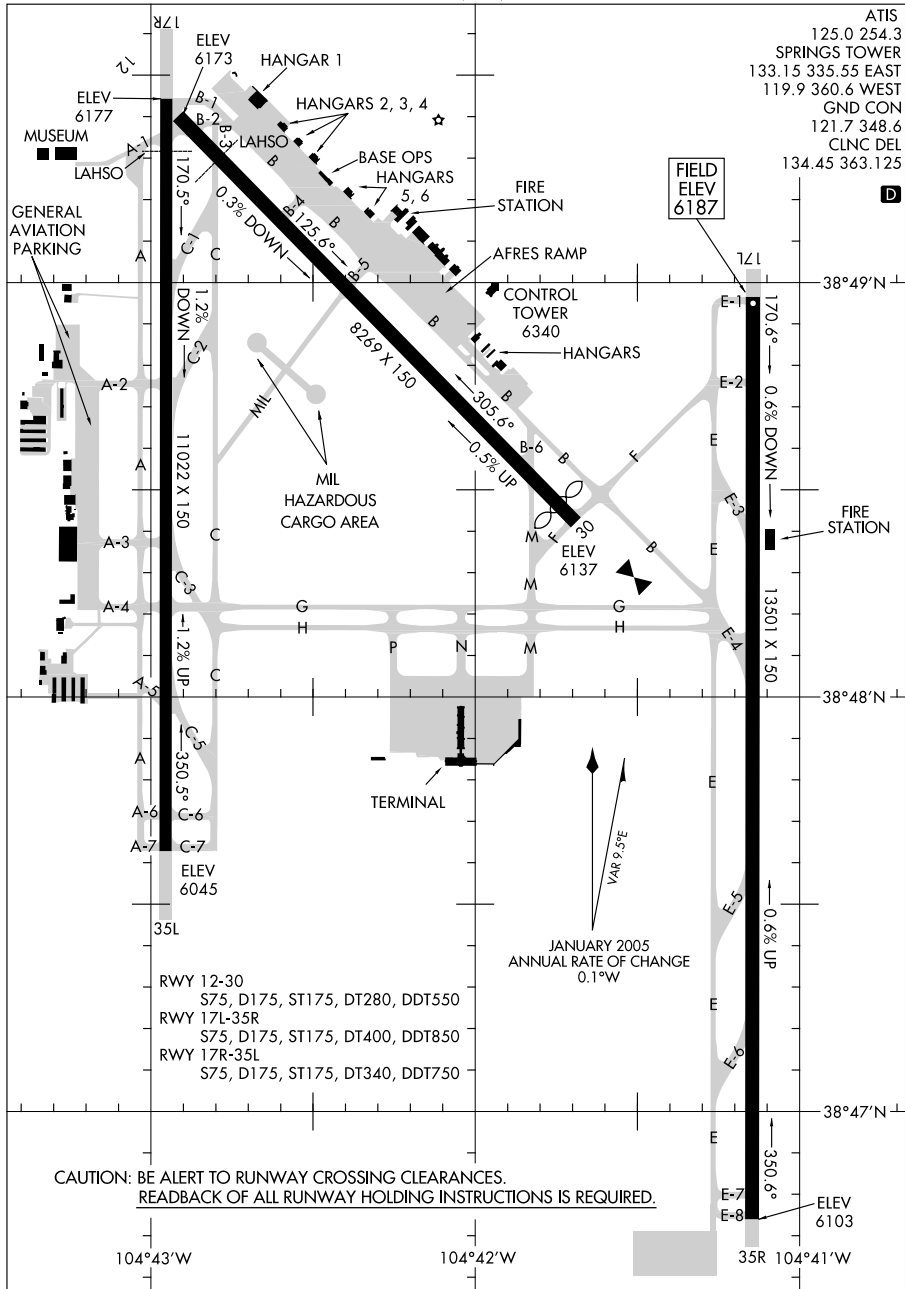

AIRPORT DIAGRAM


COLORADO SPRINGS, COLORADO
COLORADO SPRINGS/CITY OF COLORADO SPRINGS MUNI (COS)

09351

09351

AIRPORT DIAGRAM

AL-5320 (FAA)

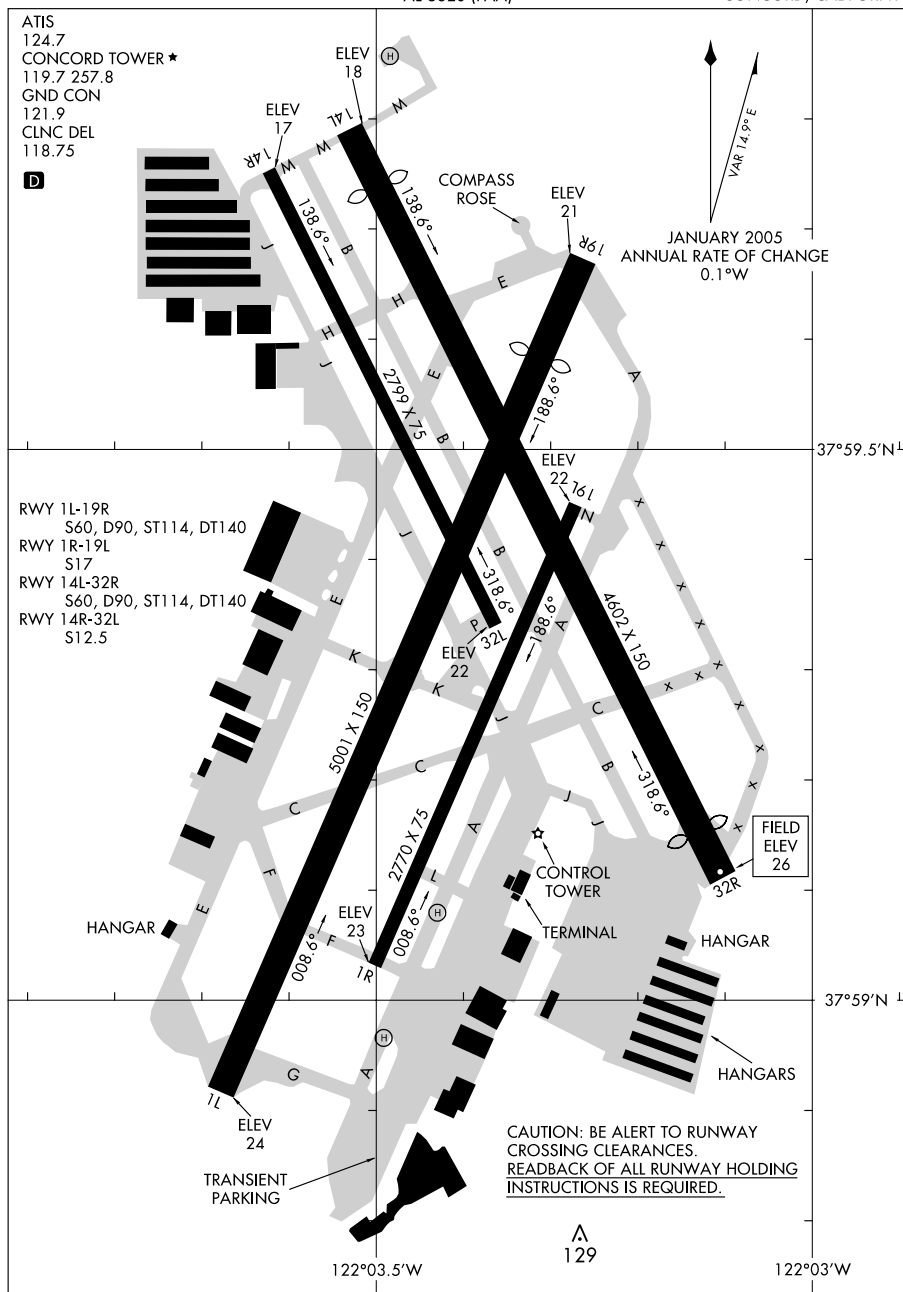CONCORD/BUCHANAN FIELD (CCR)
CONCORD, CALIFORNIA

AIRPORT DIAGRAM

09351

CONCORD, CALIFORNIA
CONCORD/BUCHANAN FIELD (CCR)


09239

AIRPORT DIAGRAM

AL-104 (FAA)

DAGGETT/BARSTOW-DAGGETT (DAG)

DAGGETT, CALIFORNIA

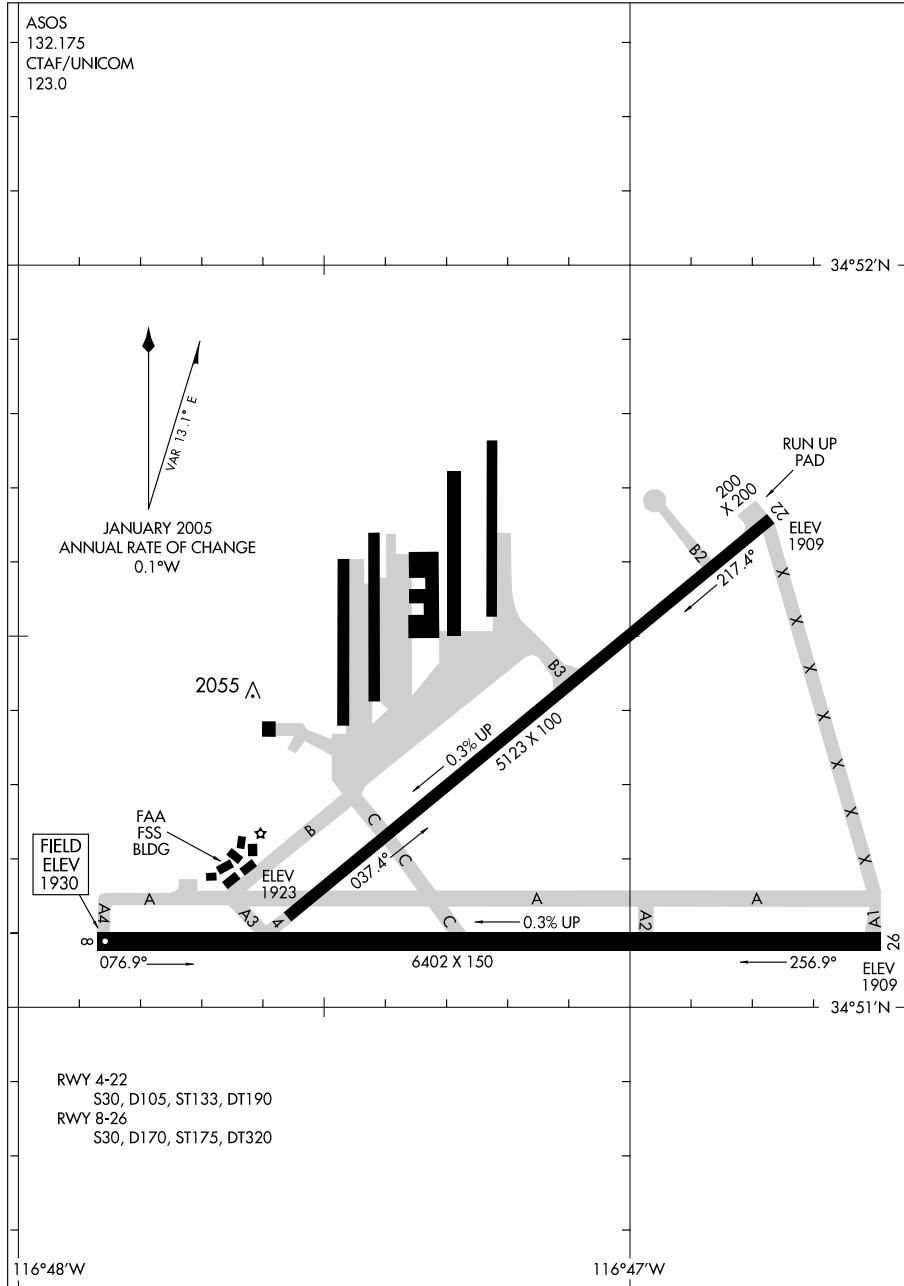

AIRPORT DIAGRAM

09239

DAGGETT, CALIFORNIA
DAGGETT/BARSTOW-DAGGETT (DAG)


05188

DAVIS-MONTHAN AFB (KDMA)

AIRPORT DIAGRAM

AFD-429 [USAF]

TUCSON, ARIZONA

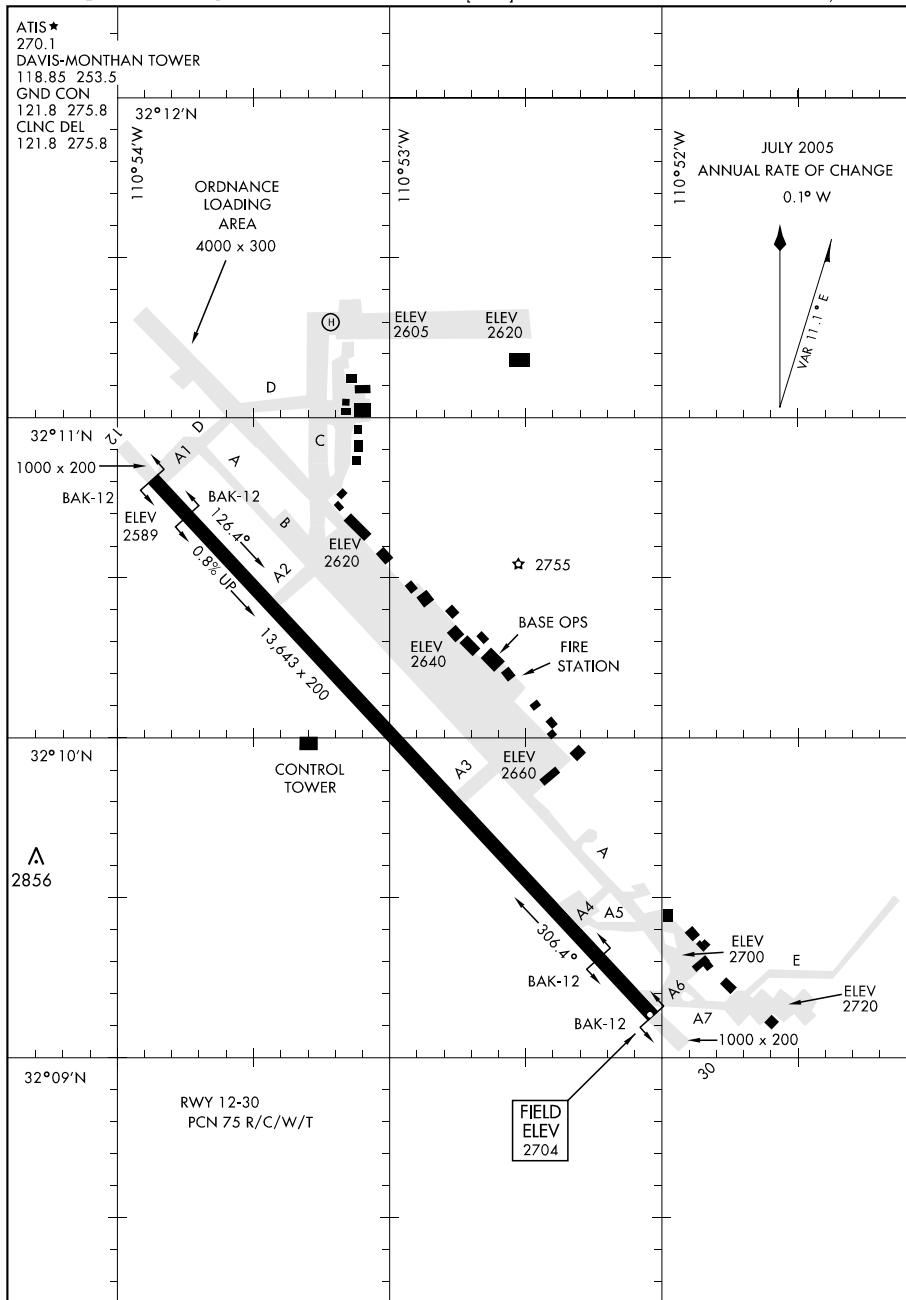

AIRPORT DIAGRAM

TUCSON, ARIZONA


DAVIS-MONTHAN AFB (KDMA)

09239

AIRPORT DIAGRAM

AL-5715 (FAA)

DENVER/CENTENNIAL (APA)
DENVER, COLORADO

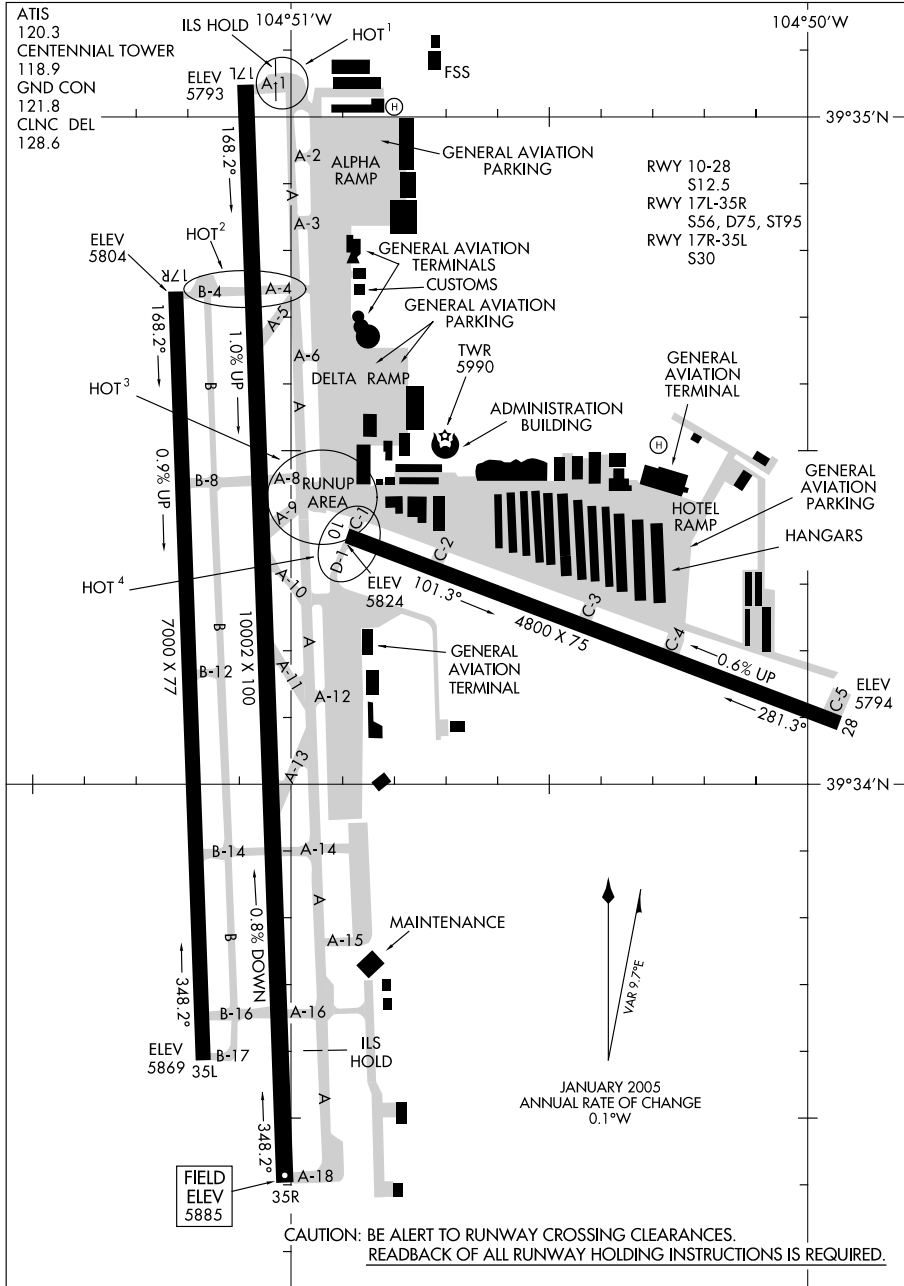

AIRPORT DIAGRAM


09239

DENVER, COLORADO
DENVER/CENTENNIAL (APA)

09015

AIRPORT DIAGRAM

AL-6851 (FAA)

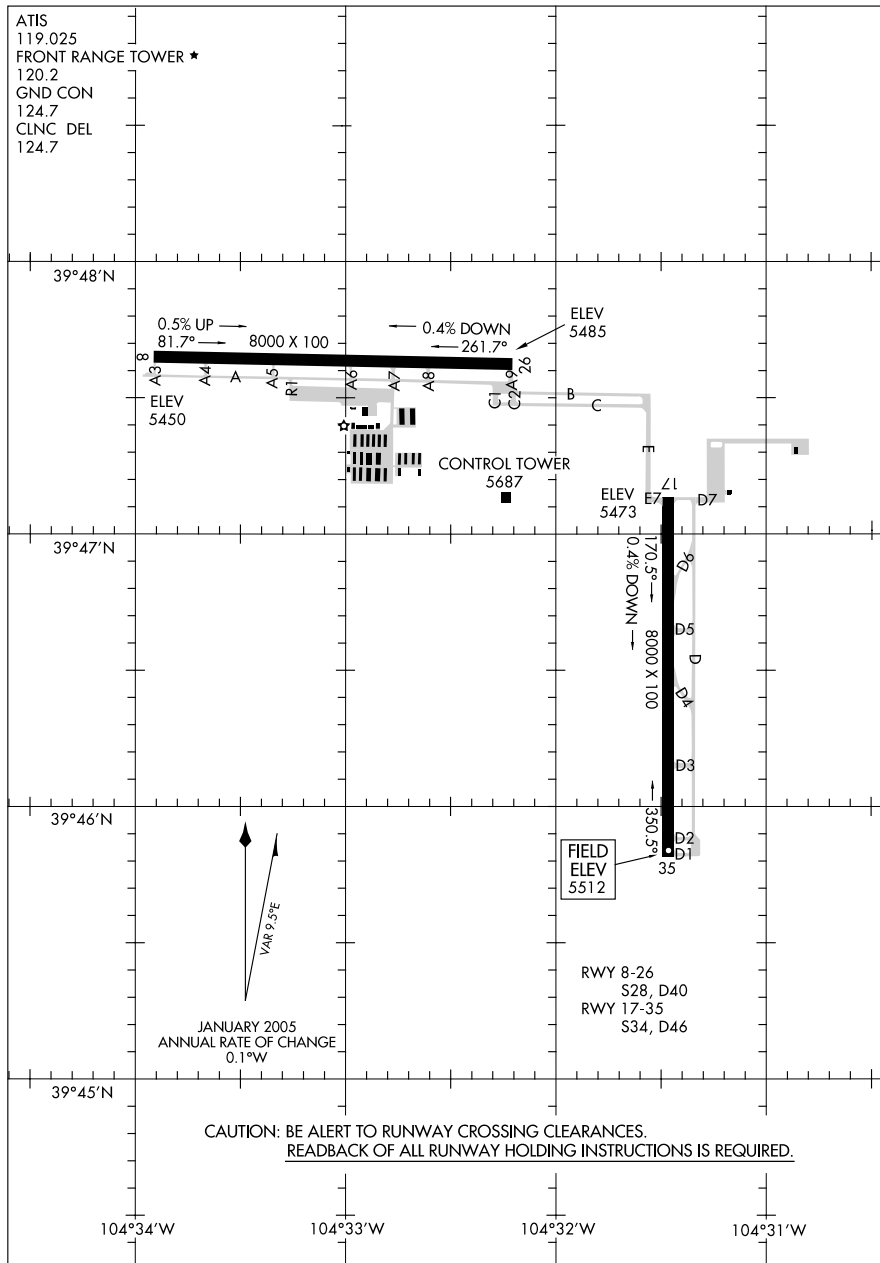DENVER/FRONT RANGE (F'TG)
DENVER, COLORADO

AIRPORT DIAGRAM


DENVER/FRONT RANGE (F'TG)
DENVER, COLORADO

09015

09295

AIRPORT DIAGRAM

EAGLE COUNTY RGNL (EGE)
EAGLE, COLORADO

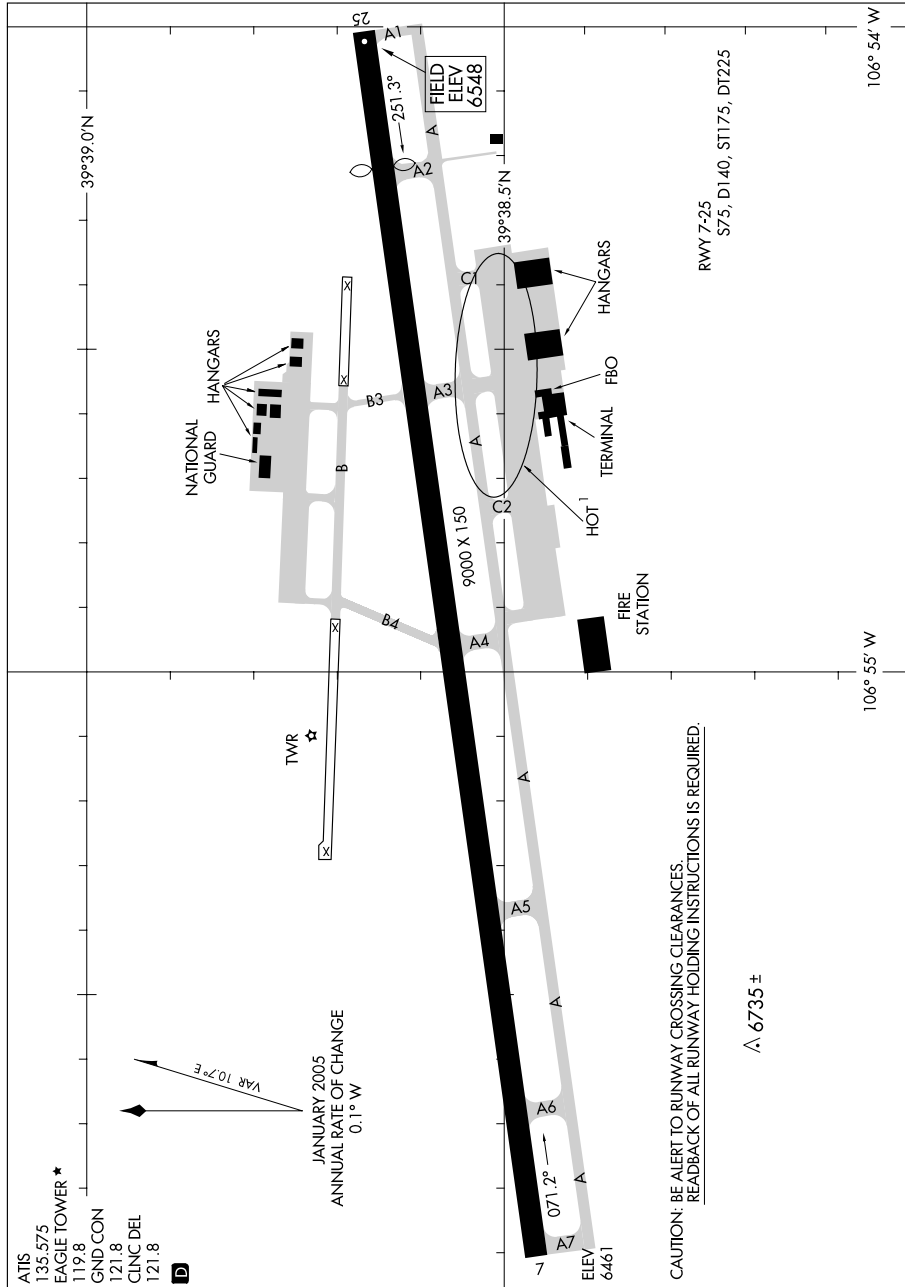

AIRPORT DIAGRAM


09295

EAGLE, COLORADO
EAGLE COUNTY RGNL (EGE)

09295

EDWARDS/ROGERS LAKEBED (KEDW)

EDWARDS, CALIFORNIA

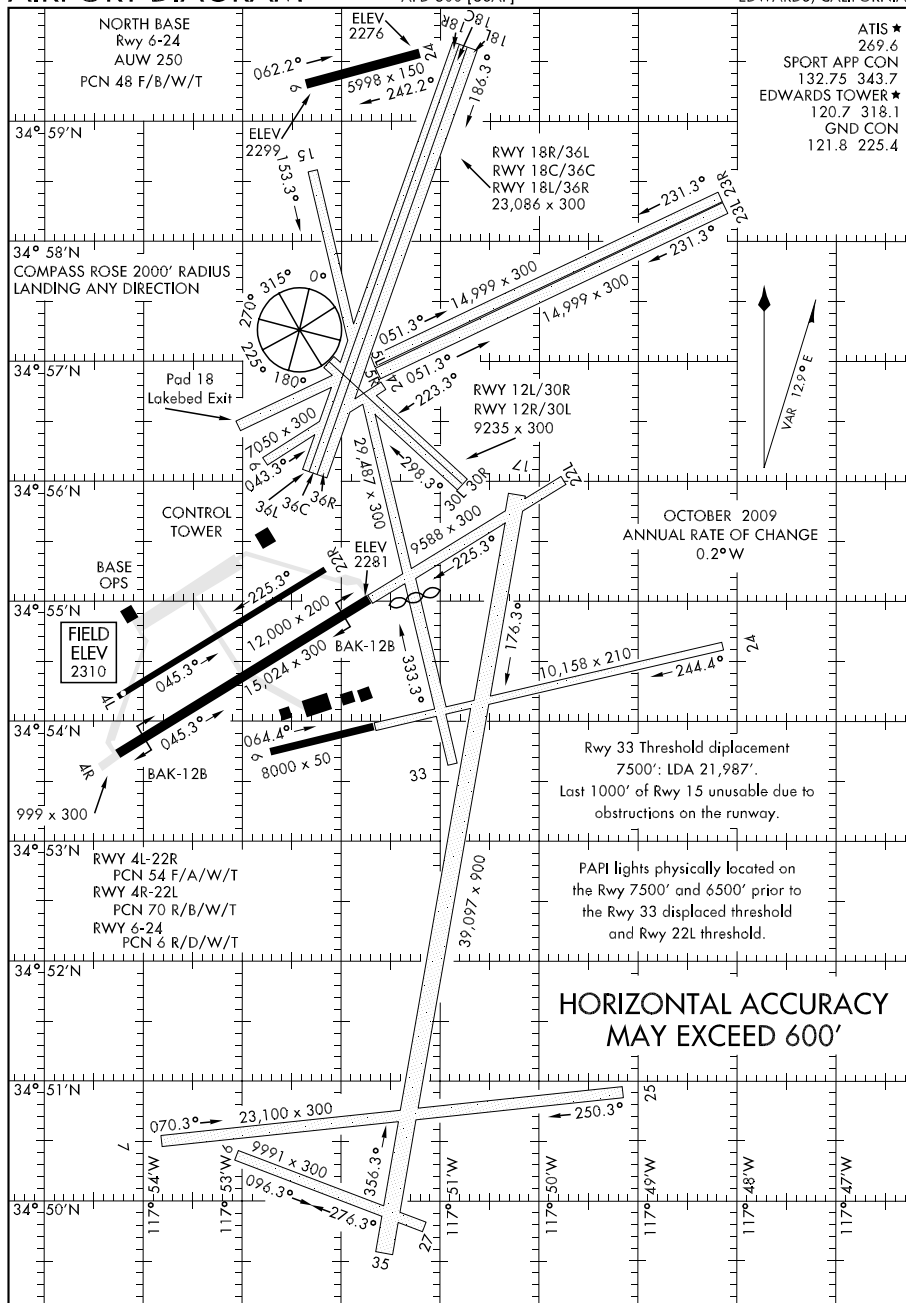

EDWARDS, CALIFORNIA

EDWARDS/ROGERS LAKEBED (KEDW)

07354

AIRPORT DIAGRAM


EL CENTRO NAF (KNJK)

EL CENTRO, CALIFORNIA

AFD-472 [USN]

ATIS ★ 269.275
 EL CENTRO TOWER ★
 119.1 360.2
 GND CON
 121.9 254.35
 METRO 348.3
 CLNC DEL
 340.2

DECEMBER 2007
 ANNUAL RATE OF CHANGE
 0.2°W

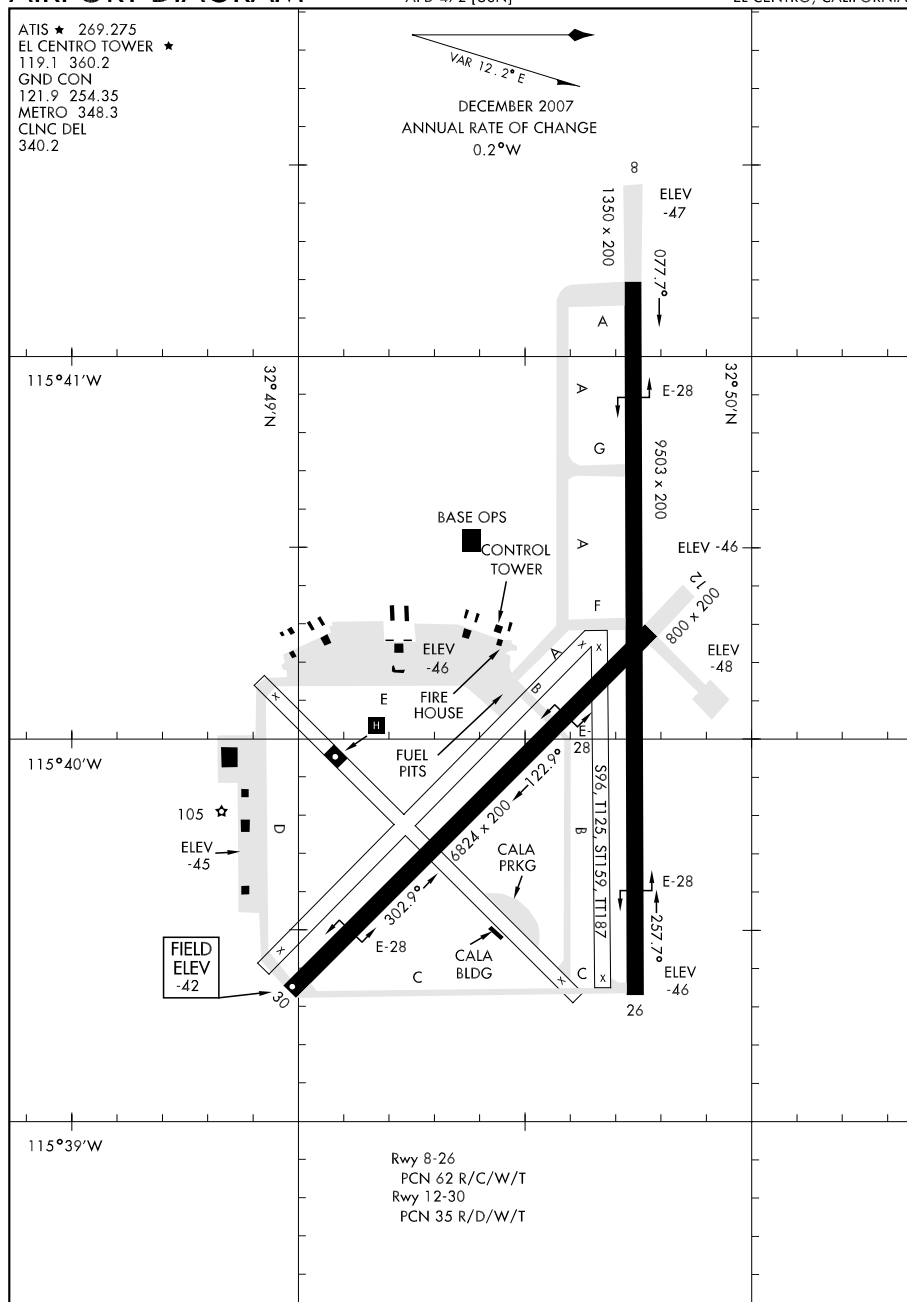

AIRPORT DIAGRAM

EL CENTRO, CALIFORNIA


EL CENTRO NAF (KNJK)

09071

AIRPORT DIAGRAM

AL-5639 (FAA)

EL MONTE (EMT)
EL MONTE, CALIFORNIA

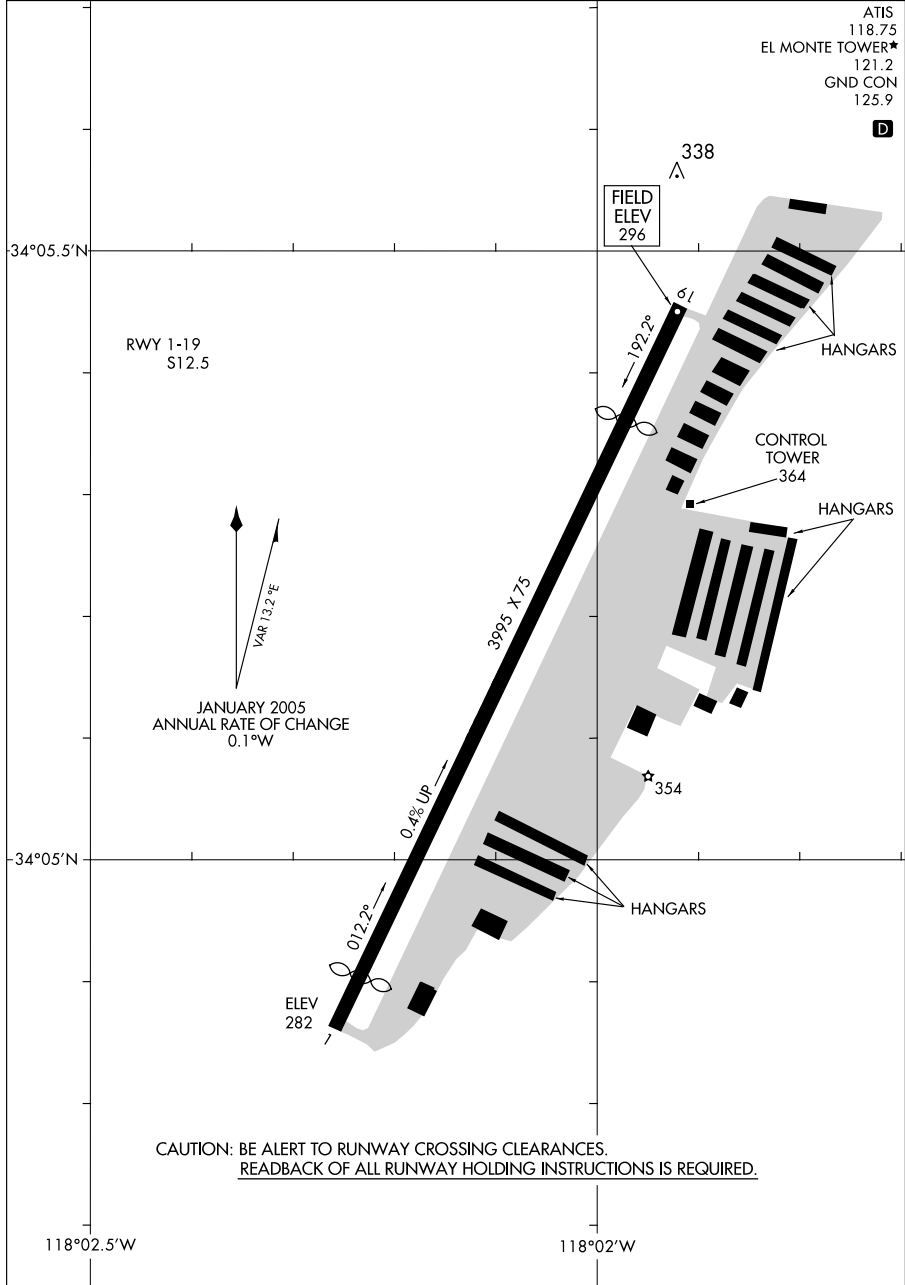

AIRPORT DIAGRAM

09071


EL MONTE, CALIFORNIA
EL MONTE (EMT)

09071

AIRPORT DIAGRAM

AL-129 (FAA)

ELKO RGNL (EKO)
ELKO, NEVADA

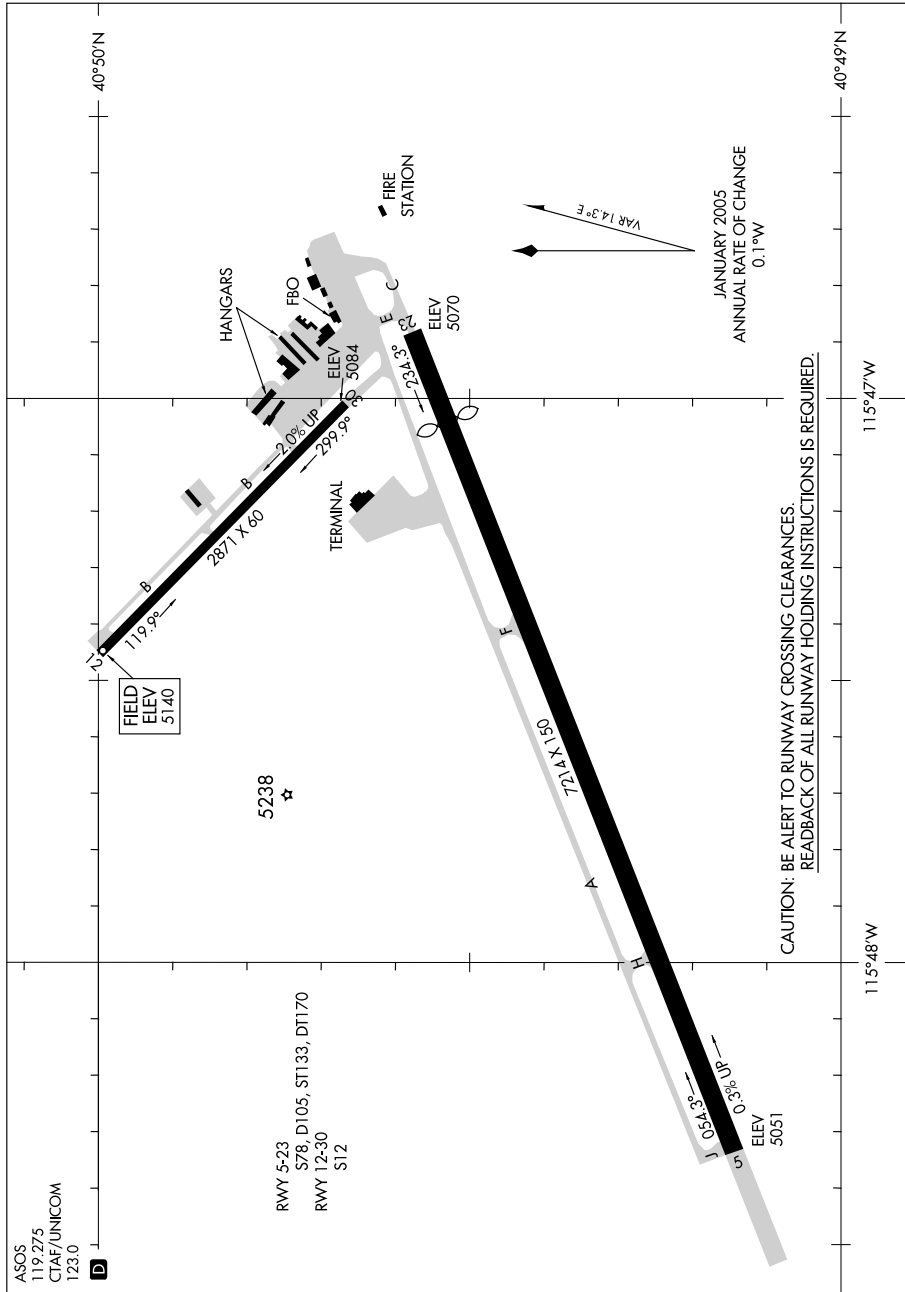

AIRPORT DIAGRAM

09071

ELKO, NEVADA
ELKO RGNL (EKO)


09267

FALLON NAS (VAN VOORHIS FIELD) (KNFL)

AIRPORT DIAGRAM

AFD-143 [USN]

FALLON, NEVADA

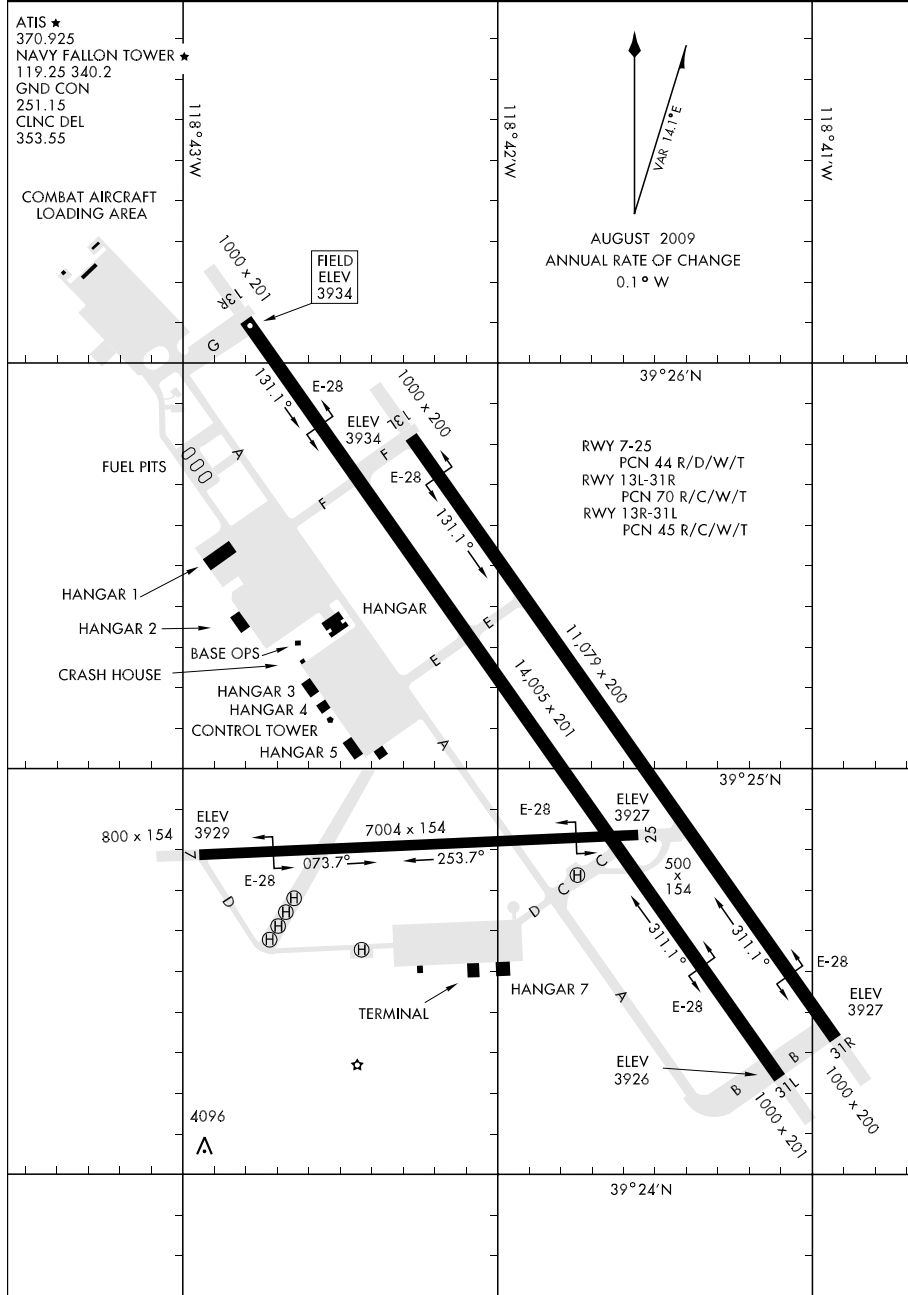


AIRPORT DIAGRAM

FALLON, NEVADA

FALLON NAS (VAN VOORHIS FIELD) (KNFL)

09351

AIRPORT DIAGRAM

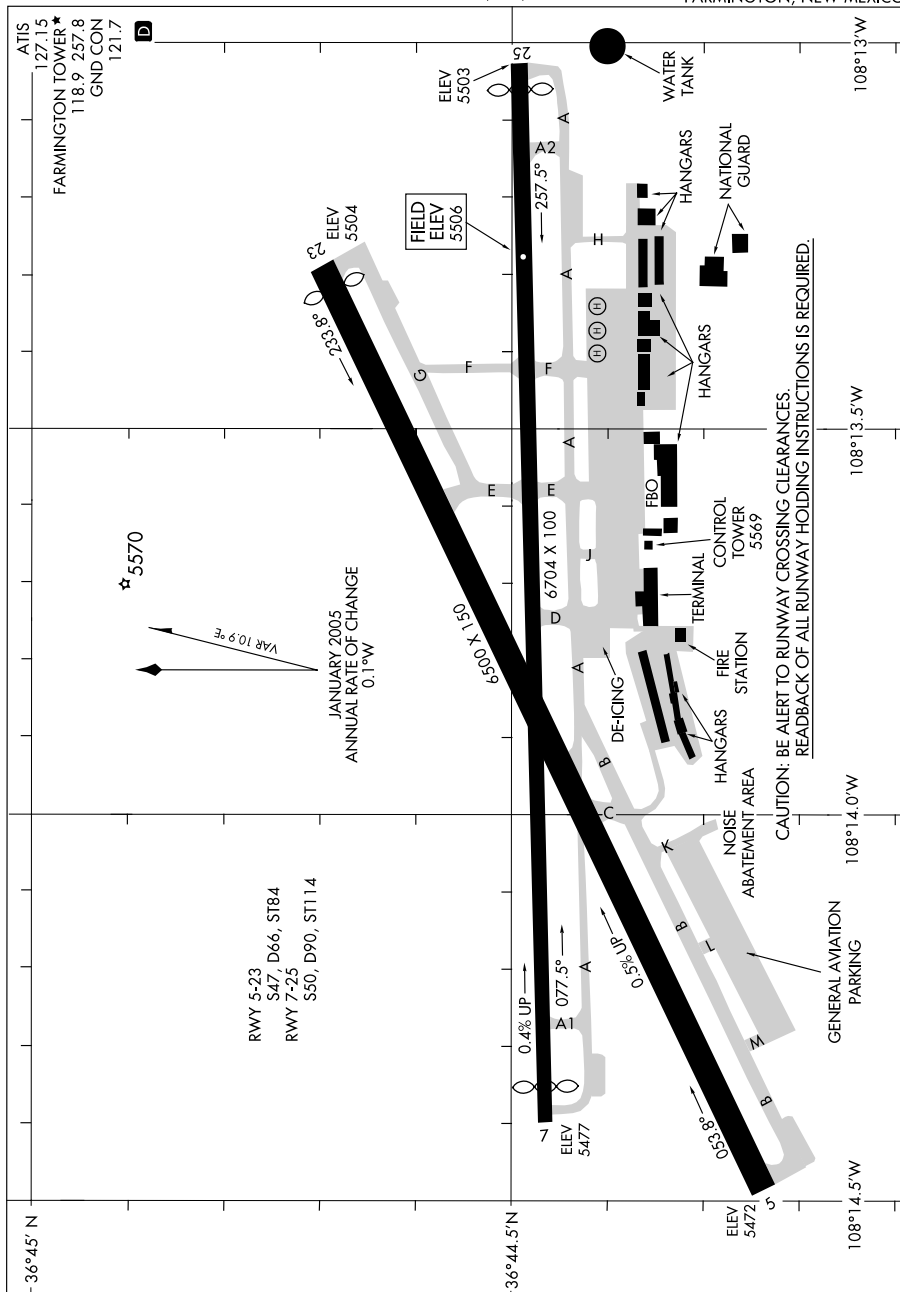FARMINGTON/ FOUR CORNERS RGNL (FMN)
AL-493 (FAA) FARMINGTON, NEW MEXICO

AIRPORT DIAGRAM

09351


FARMINGTON, NEW MEXICO
FARMINGTON/ FOUR CORNERS RGNL (FMN)

09239

AIRPORT DIAGRAM

AL-5034 (FAA)

FLAGSTAFF PULLIAM (FLG)
FLAGSTAFF, ARIZONA

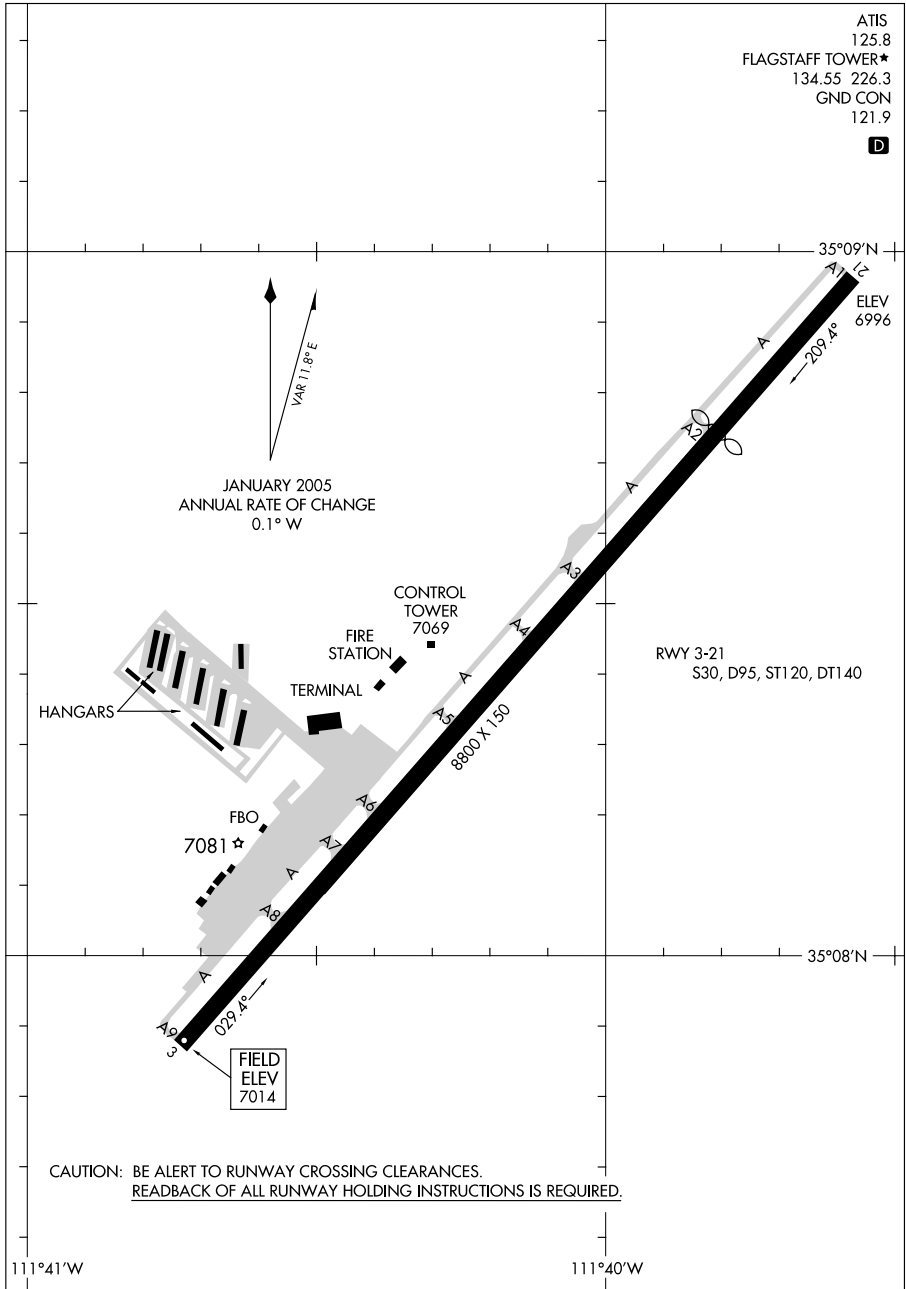

AIRPORT DIAGRAM

09239

FLAGSTAFF, ARIZONA
FLAGSTAFF PULLIAM (FLG)


09351

AIRPORT DIAGRAM

FORT HUACHUCA-SIERRA VISTA/SIERRA VISTA MUNI-LIBBY AAF (KFHU)

AFD-5081 [USA]

FORT HUACHUCA/SIERRA VISTA, ARIZONA

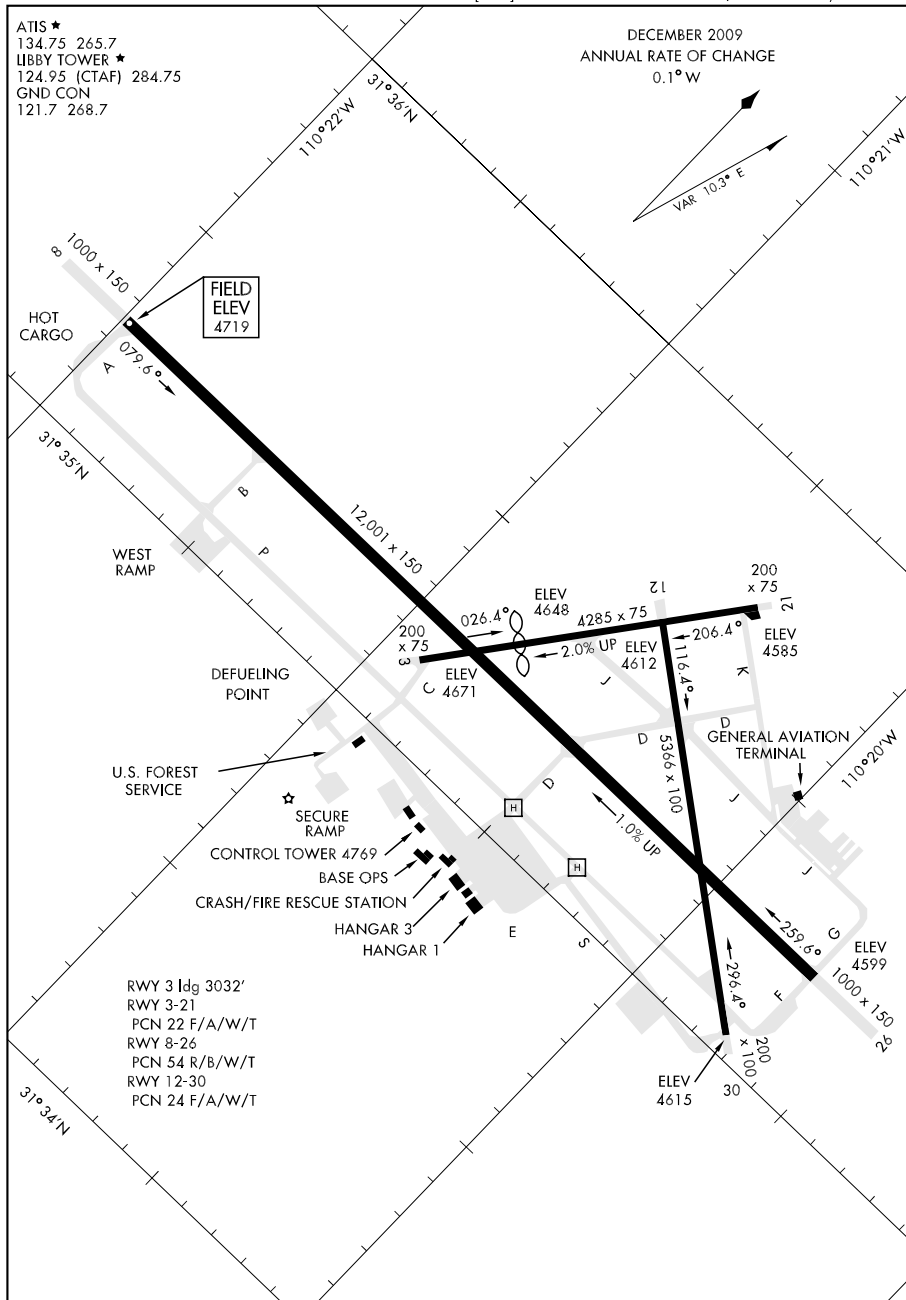

AIRPORT DIAGRAM

FORT HUACHUCA/SIERRA VISTA, ARIZONA

FORT HUACHUCA-SIERRA VISTA/SIERRA VISTA MUNI-LIBBY AAF (KFHU)


09071

AIRPORT DIAGRAM

FRESNO CHANDLER EXECUTIVE (FCH)
FRESNO, CALIFORNIA

AL-161 (FAA)

AWOS-3
135.225
CTAF/UNICOM
123.0

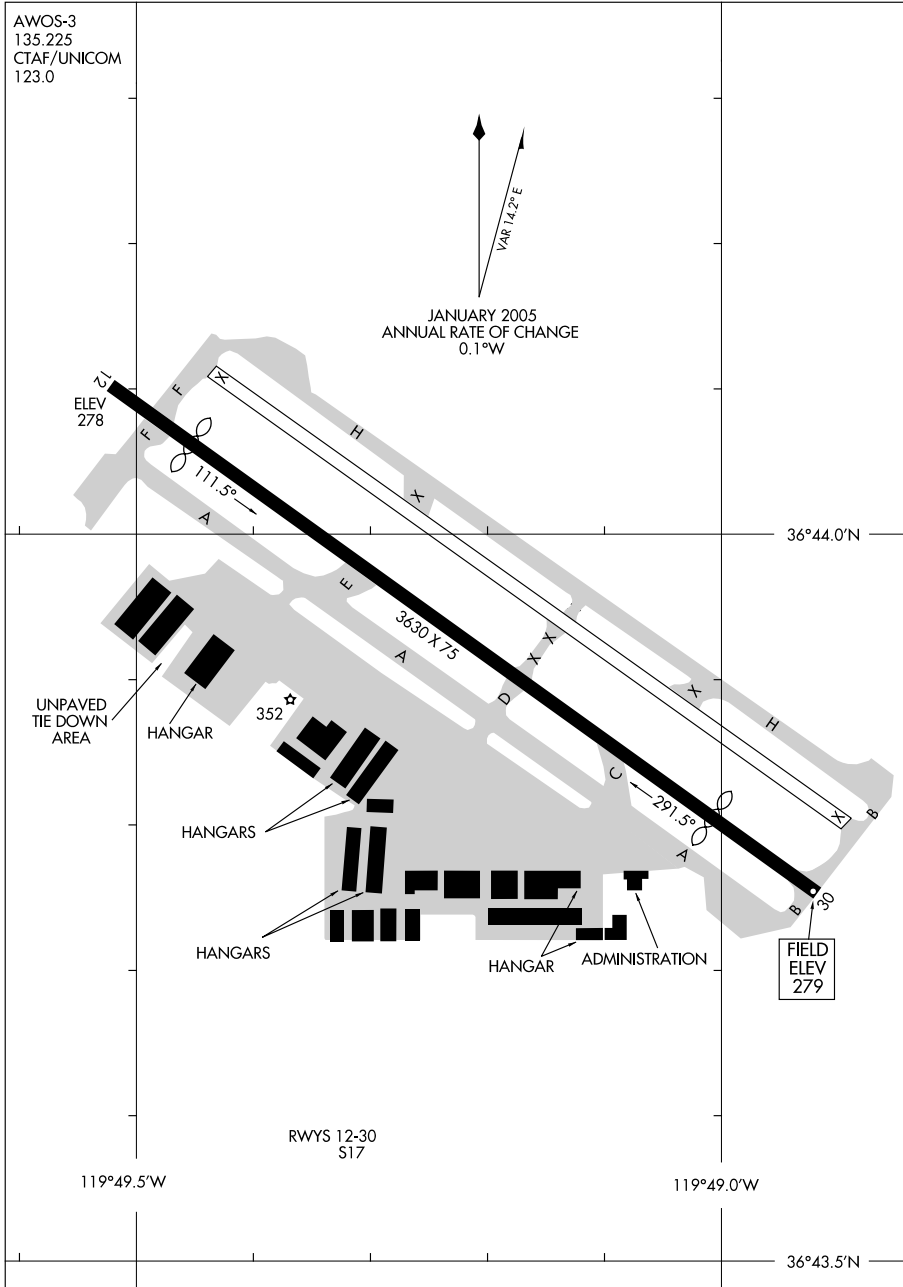

AIRPORT DIAGRAM

FRESNO, CALIFORNIA
FRESNO CHANDLER EXECUTIVE (FCH)

09071


09351

AIRPORT DIAGRAM

AL-162 (FAA)

FRESNO YOSEMITE INTL (FAT)

FRESNO, CALIFORNIA

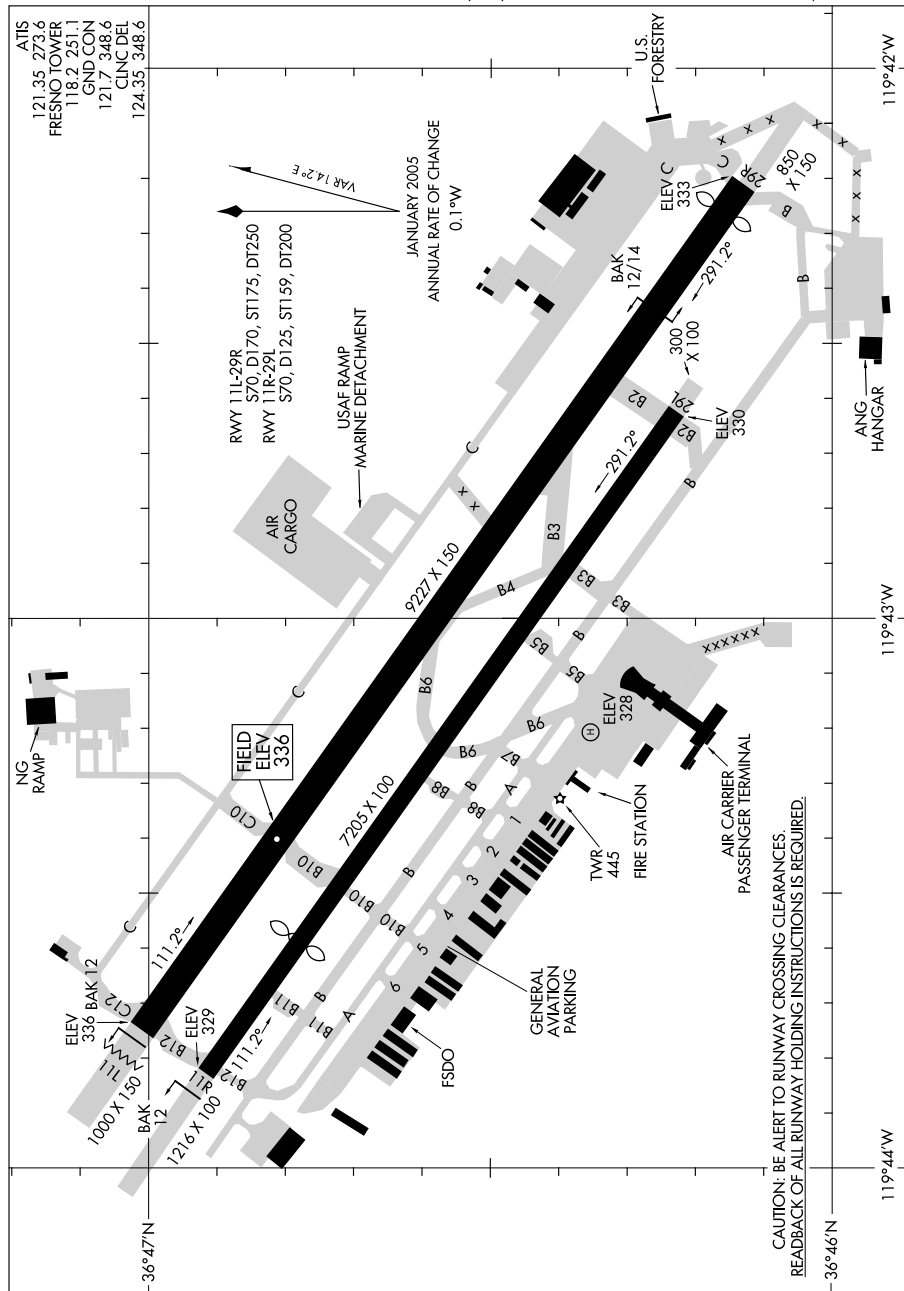

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.


AIRPORT DIAGRAM

09351

FRESNO, CALIFORNIA
FRESNO YOSEMITE INTL (FAT)

09295

AIRPORT DIAGRAM

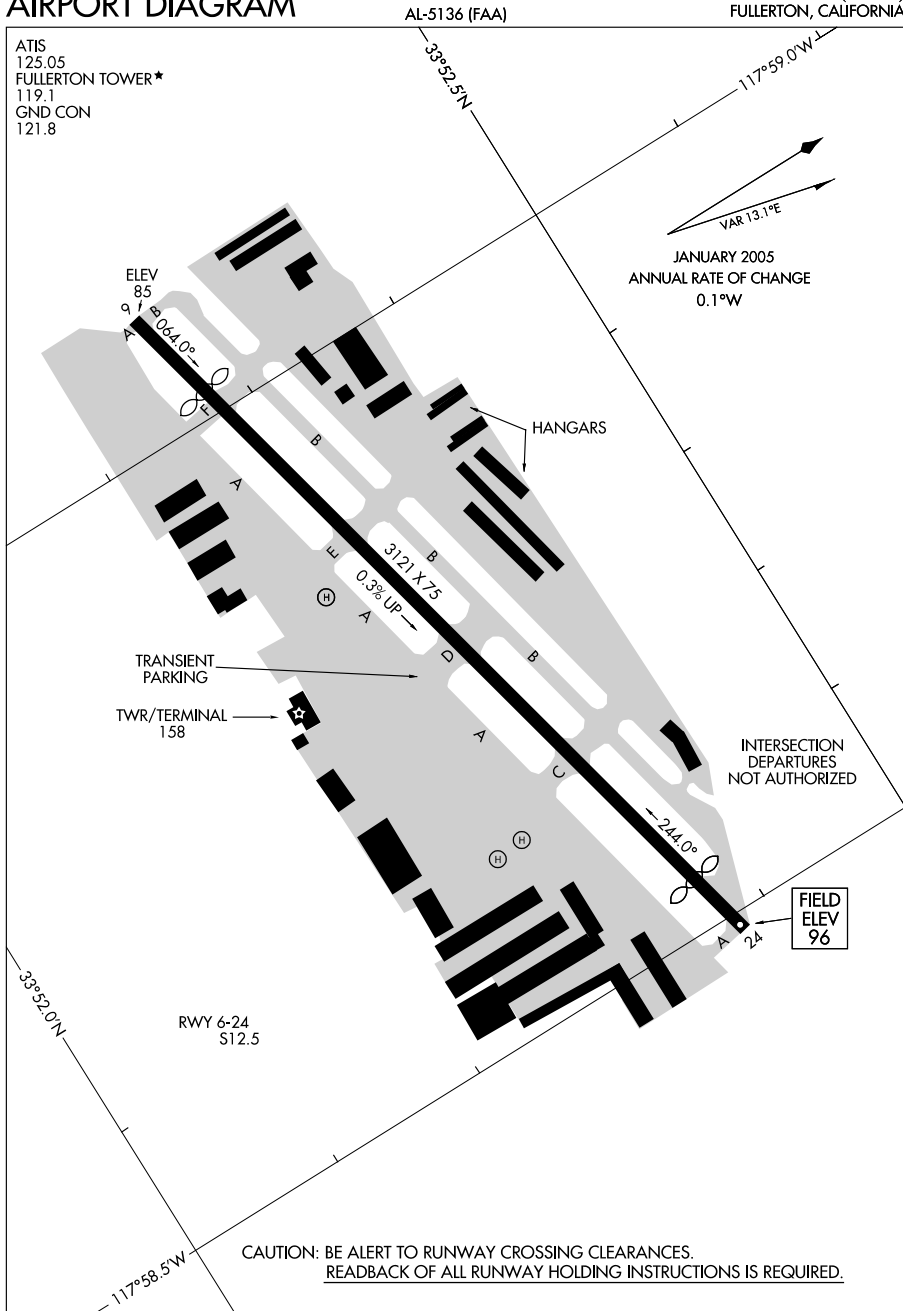FULLERTON MUNI (FUL)
FULLERTON, CALIFORNIA

AIRPORT DIAGRAM


09295

FULLERTON, CALIFORNIA
FULLERTON MUNI (FUL)

09071
AIRPORT DIAGRAM

AL-691.5 (FAA)

GLENDALE MUNI (G^{EU})
GLENDALE, ARIZONA

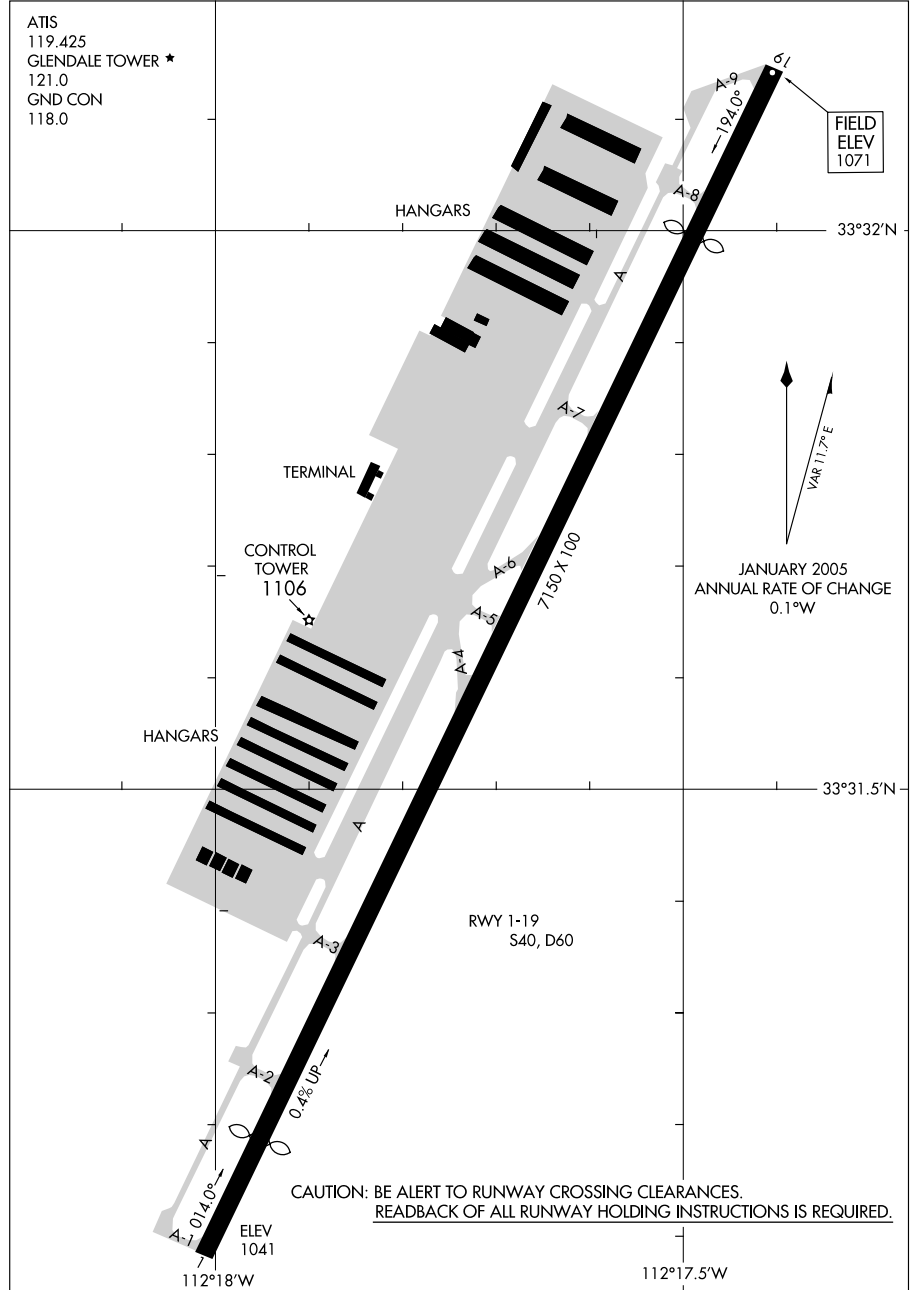

AIRPORT DIAGRAM
09071

GLENDALE, ARIZONA
GLENDALE MUNI (G^{EU})


09071

AIRPORT DIAGRAM

AL-6648 (FAA)

GOODYEAR/PHOENIX GOODYEAR (GYR)

GOODYEAR, ARIZONA

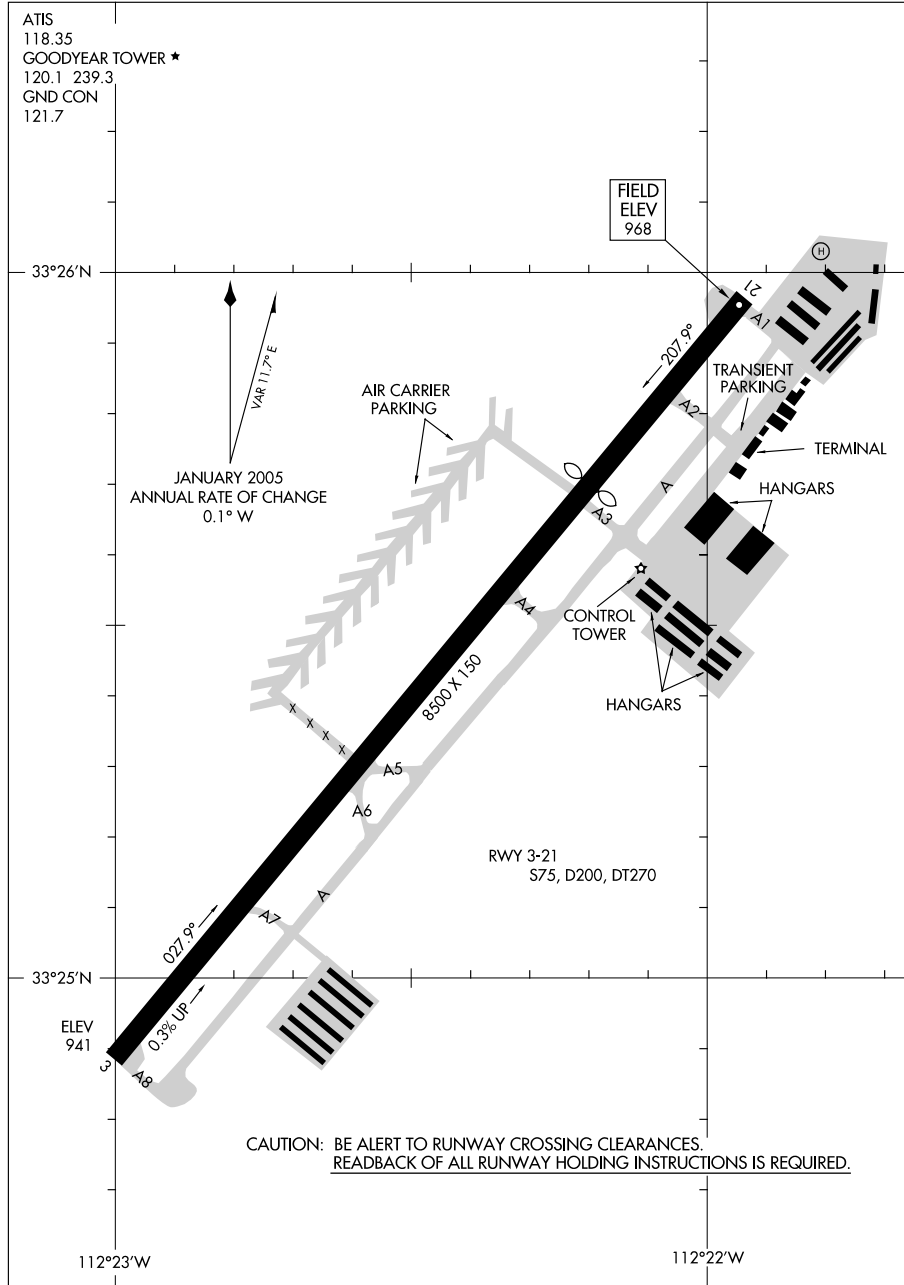

AIRPORT DIAGRAM

09071


GOODYEAR, ARIZONA
GOODYEAR/PHOENIX GOODYEAR (GYR)

06271

AIRPORT DIAGRAM

AL-5381 (FAA)

GRAND CANYON NATIONAL PARK (GCN)
GRAND CANYON, ARIZONA

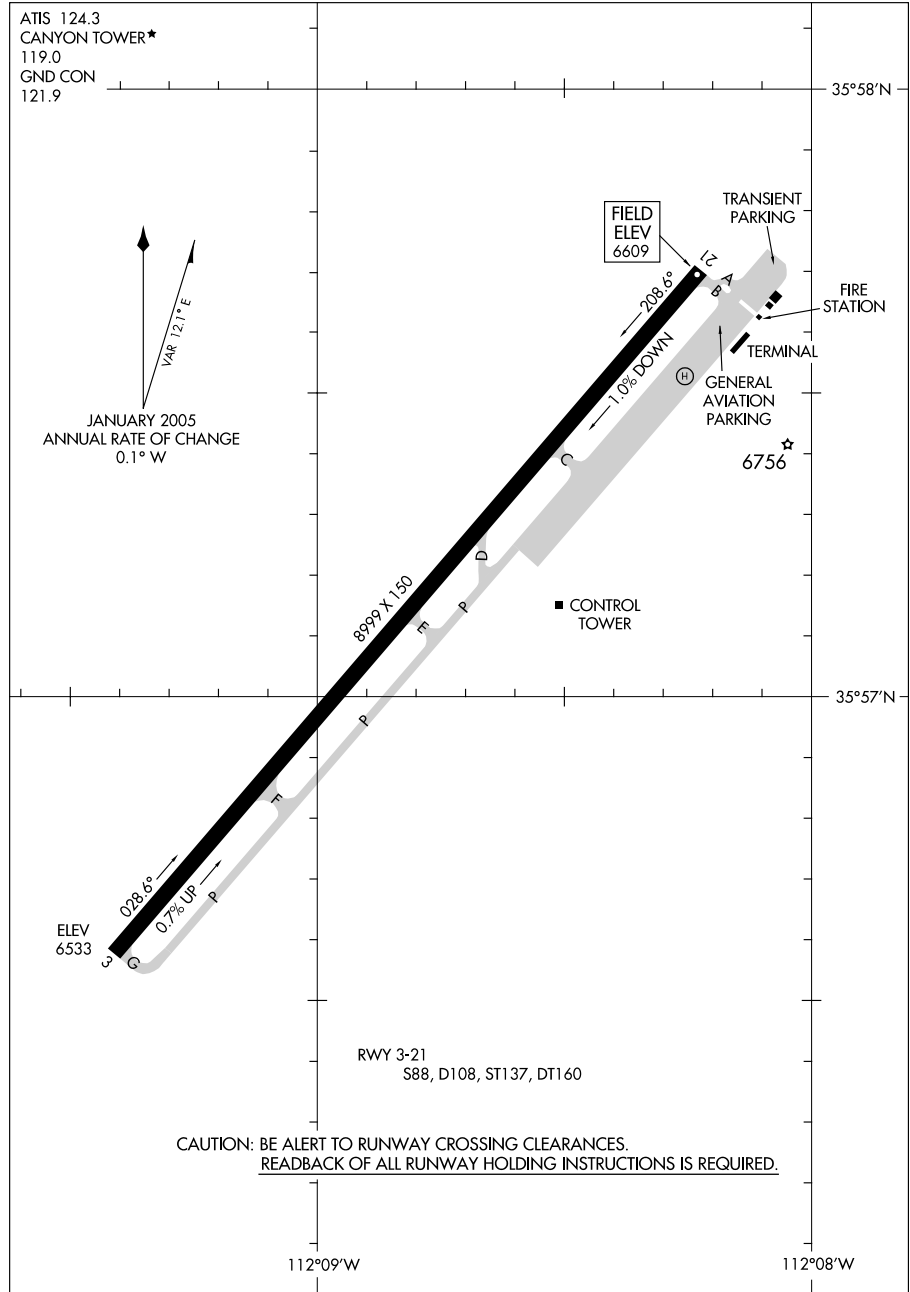

AIRPORT DIAGRAM

06271


GRAND CANYON, ARIZONA
GRAND CANYON NATIONAL PARK (GCN)

07242

AIRPORT DIAGRAM

GRAND JUNCTION RGNL (GJT)
GRAND JUNCTION, COLORADO

AL-634 (FAA)

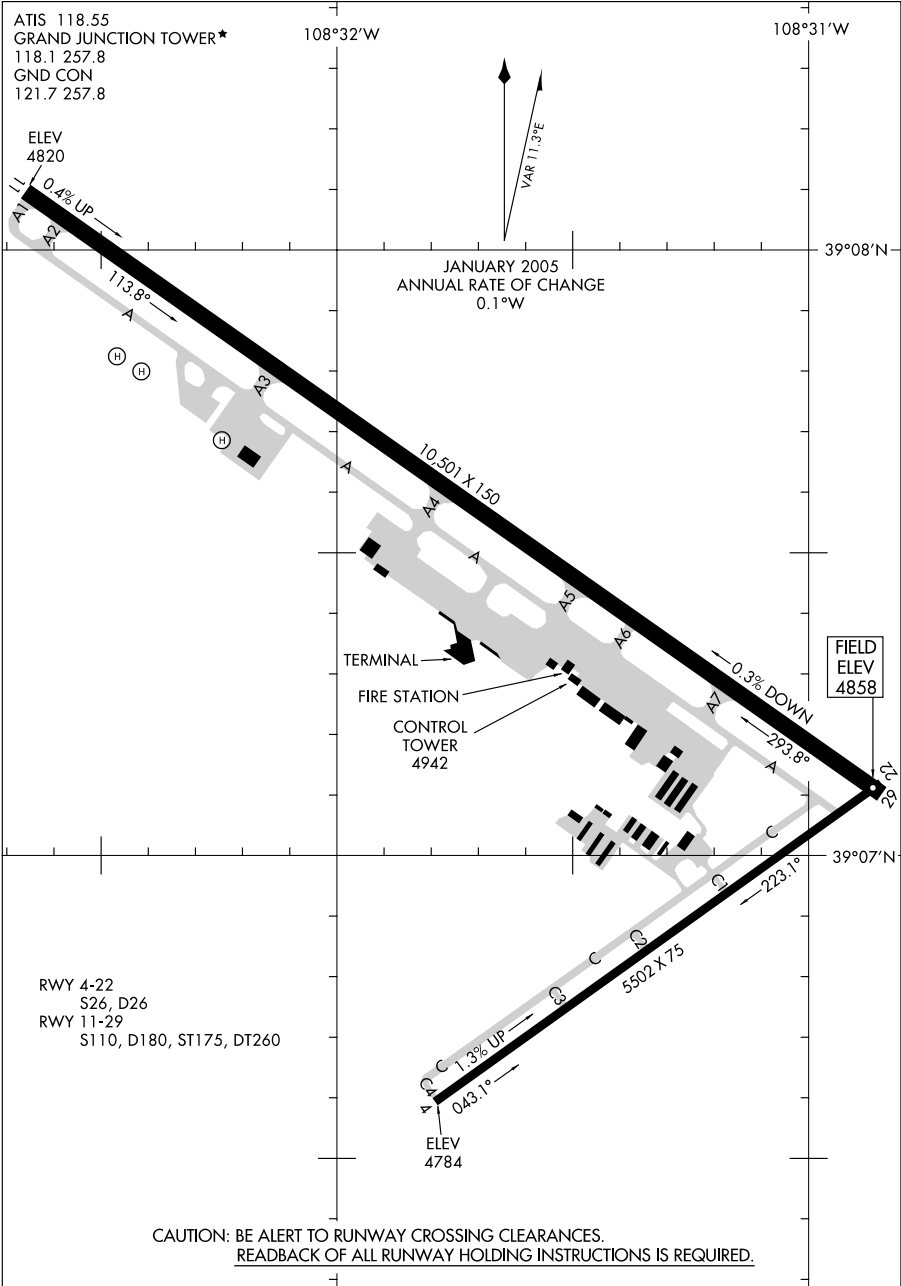

AIRPORT DIAGRAM

GRAND JUNCTION, COLORADO
GRAND JUNCTION RGNL (GJT)

07242


06327

AIRPORT DIAGRAM

GRASS VALLEY/ NEVADA COUNTY AIRPARK (G00)

AL-6659 (FAA)

GRASS VALLEY, CALIFORNIA

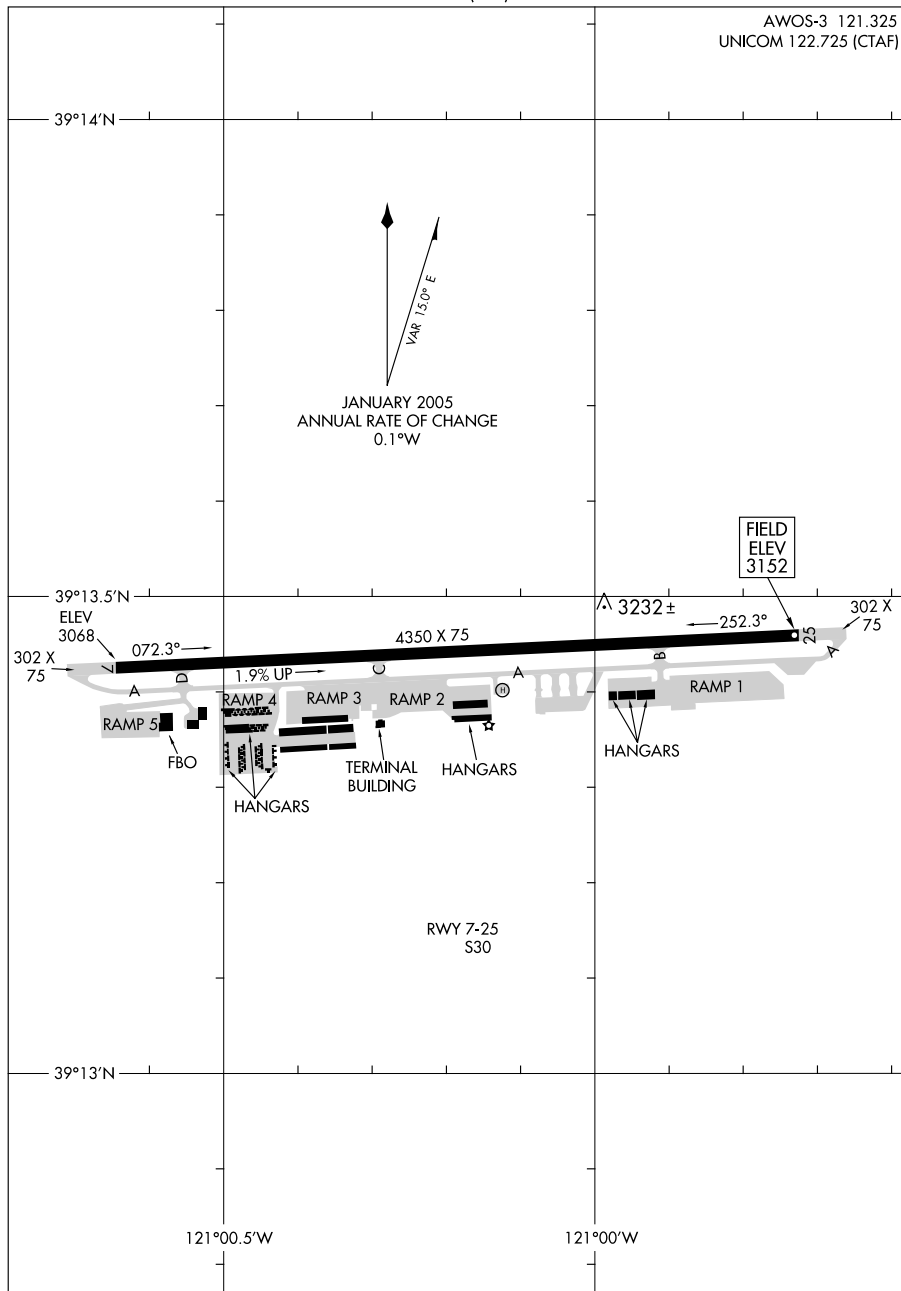AWOS-3 121.325
UNICOM 122.725 (CTAF)

AIRPORT DIAGRAM

06327


GRASS VALLEY, CALIFORNIA
GRASS VALLEY/ NEVADA COUNTY AIRPARK (G00)

09071

AIRPORT DIAGRAM

GREELEY-WELD COUNTY (GXY)
GREELEY, COLORADO

AL-325 (FAA)

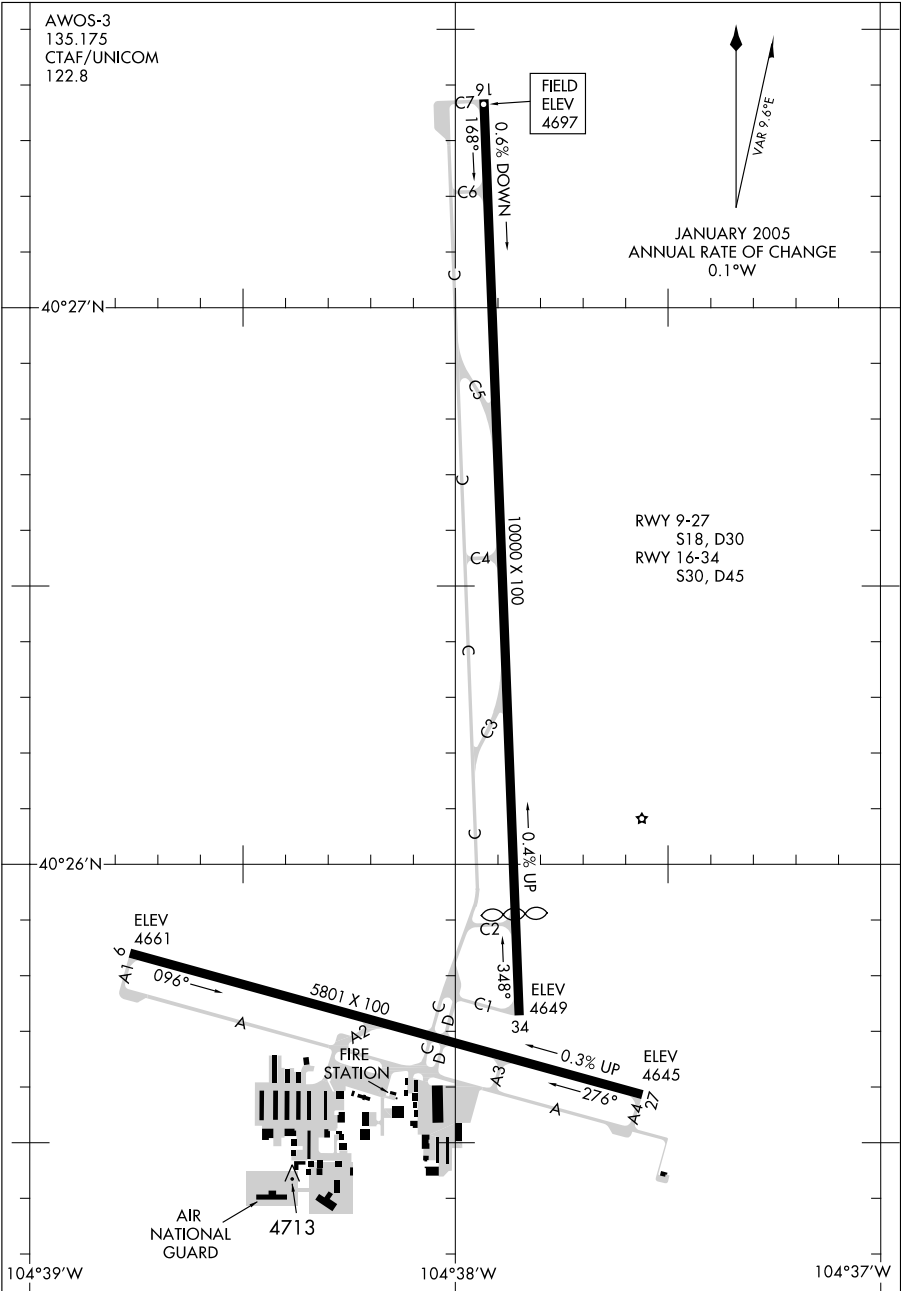

AIRPORT DIAGRAM

GREELEY, COLORADO
GREELEY-WELD COUNTY (GXY)


09071

09295

AIRPORT DIAGRAM

HAWTHORNE/JACK NORTHROP FIELD/HAWTHORNE MUNI (HHR)
AL-5120 (FAA)

HAWTHORNE, CALIFORNIA

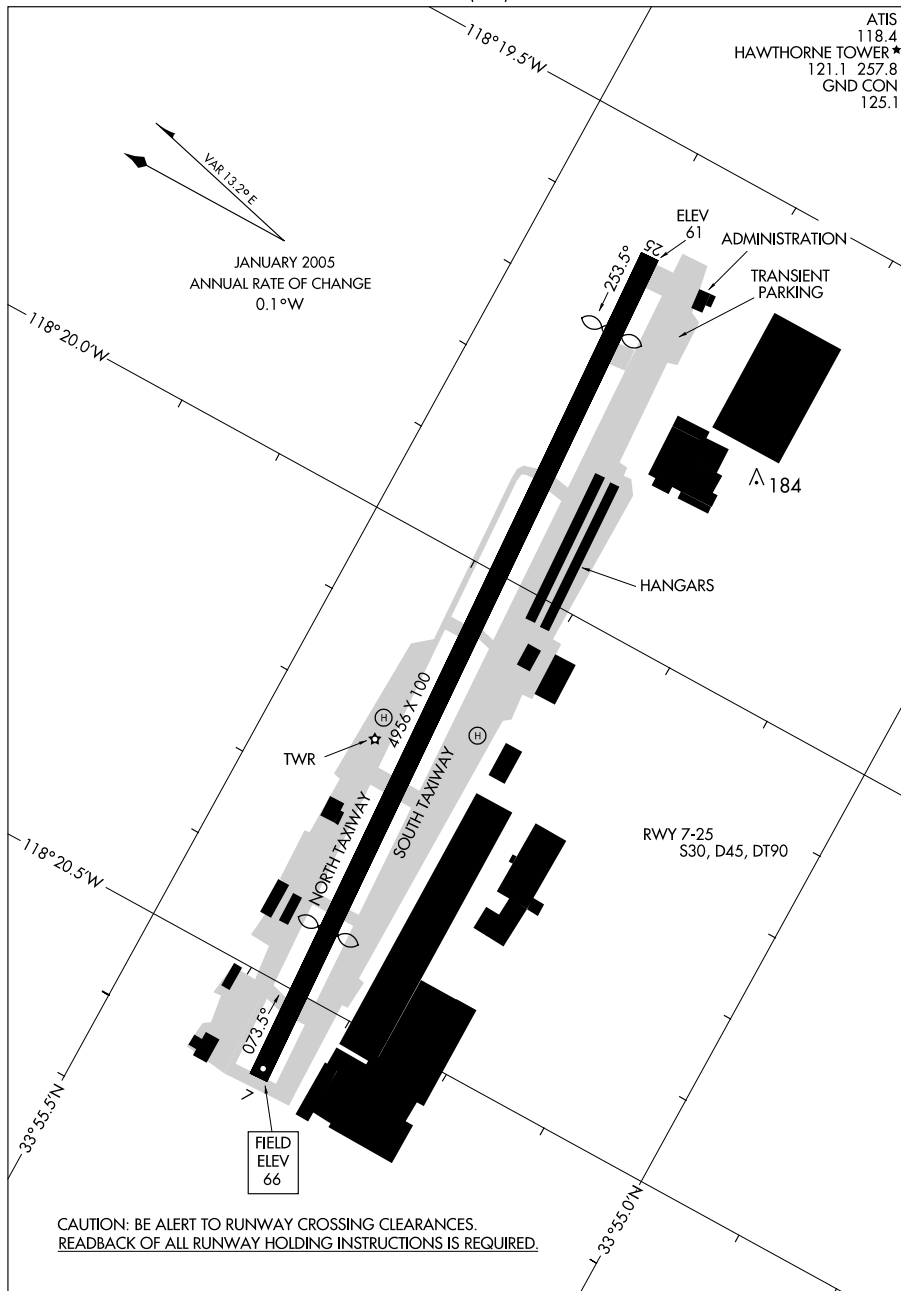

AIRPORT DIAGRAM


09295

HAWTHORNE, CALIFORNIA
HAWTHORNE/JACK NORTHROP FIELD/HAWTHORNE MUNI (HHR)

09295

AIRPORT DIAGRAM

AL-5015 (FAA)

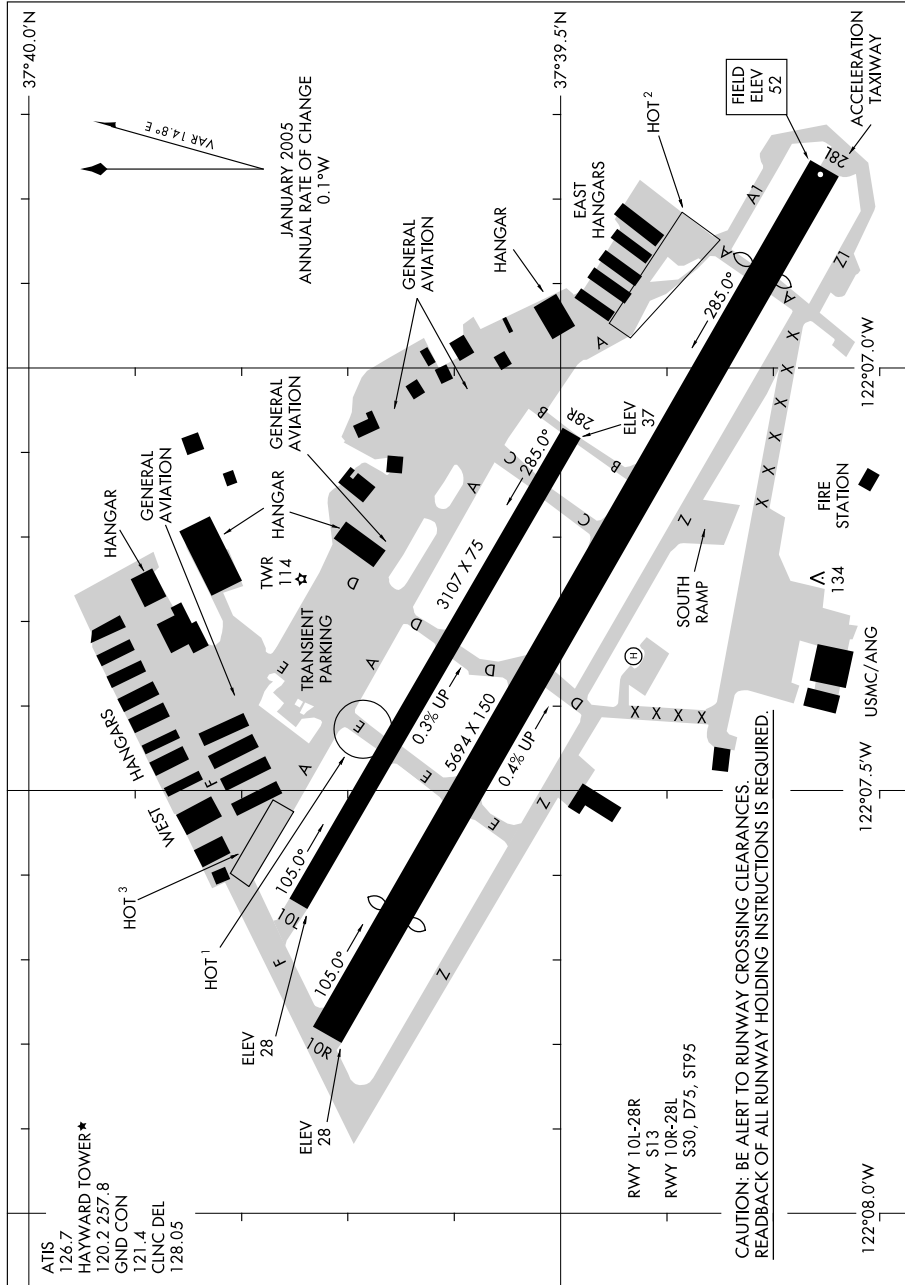HAYWARD EXECUTIVE (HWD)
HAYWARD, CALIFORNIA

AIRPORT DIAGRAM

09295

HAYWARD, CALIFORNIA
HAYWARD EXECUTIVE (HWD)


08269

AIRPORT DIAGRAM

AFD-296 [USAF]

HILL AFB (KHIF)

OGDEN, UTAH

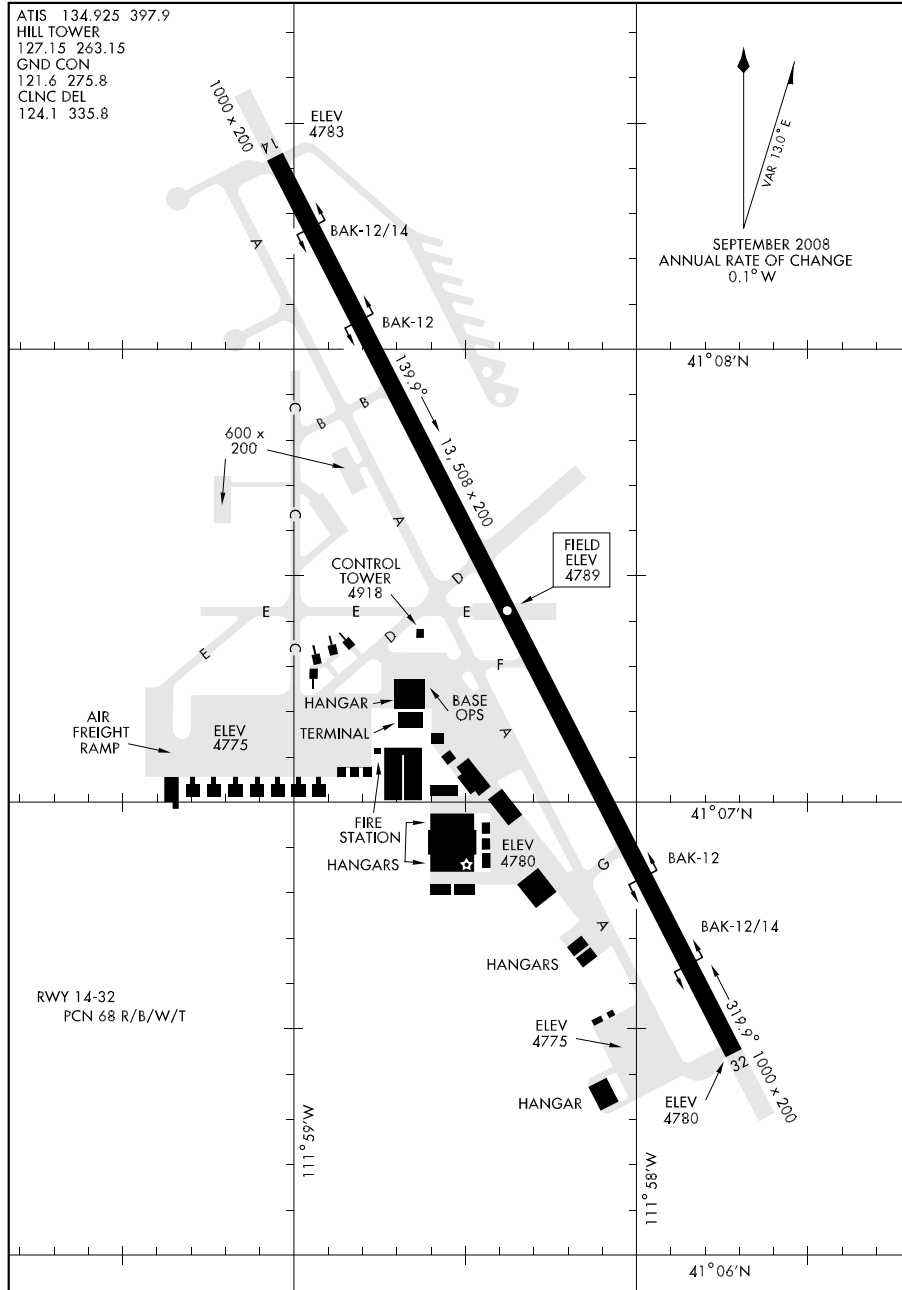

AIRPORT DIAGRAM

WGS DATUM

OGDEN, UTAH

HILL AFB (KHIF)


09351

AIRPORT DIAGRAM

AL-851 (FAA)

HOBBS/LEA COUNTY RGNL (HOB)

HOBBS, NEW MEXICO

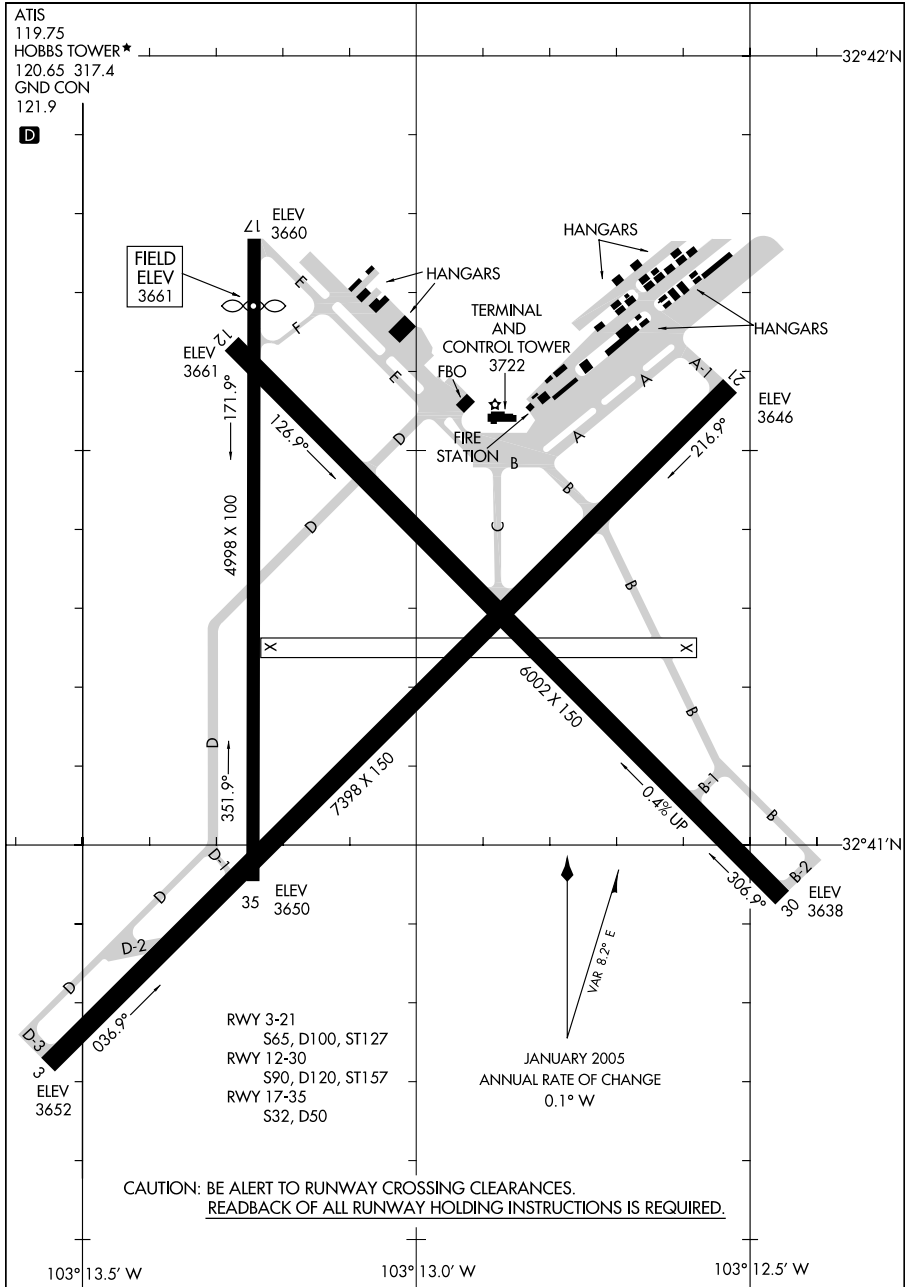

AIRPORT DIAGRAM

09351


HOBBS, NEW MEXICO
HOBBS/LEA COUNTY RGNL (HOB)

09183

AIRPORT DIAGRAM

HOLLOMAN AFB (KHMN)

ALAMOGORDO, NEW MEXICO

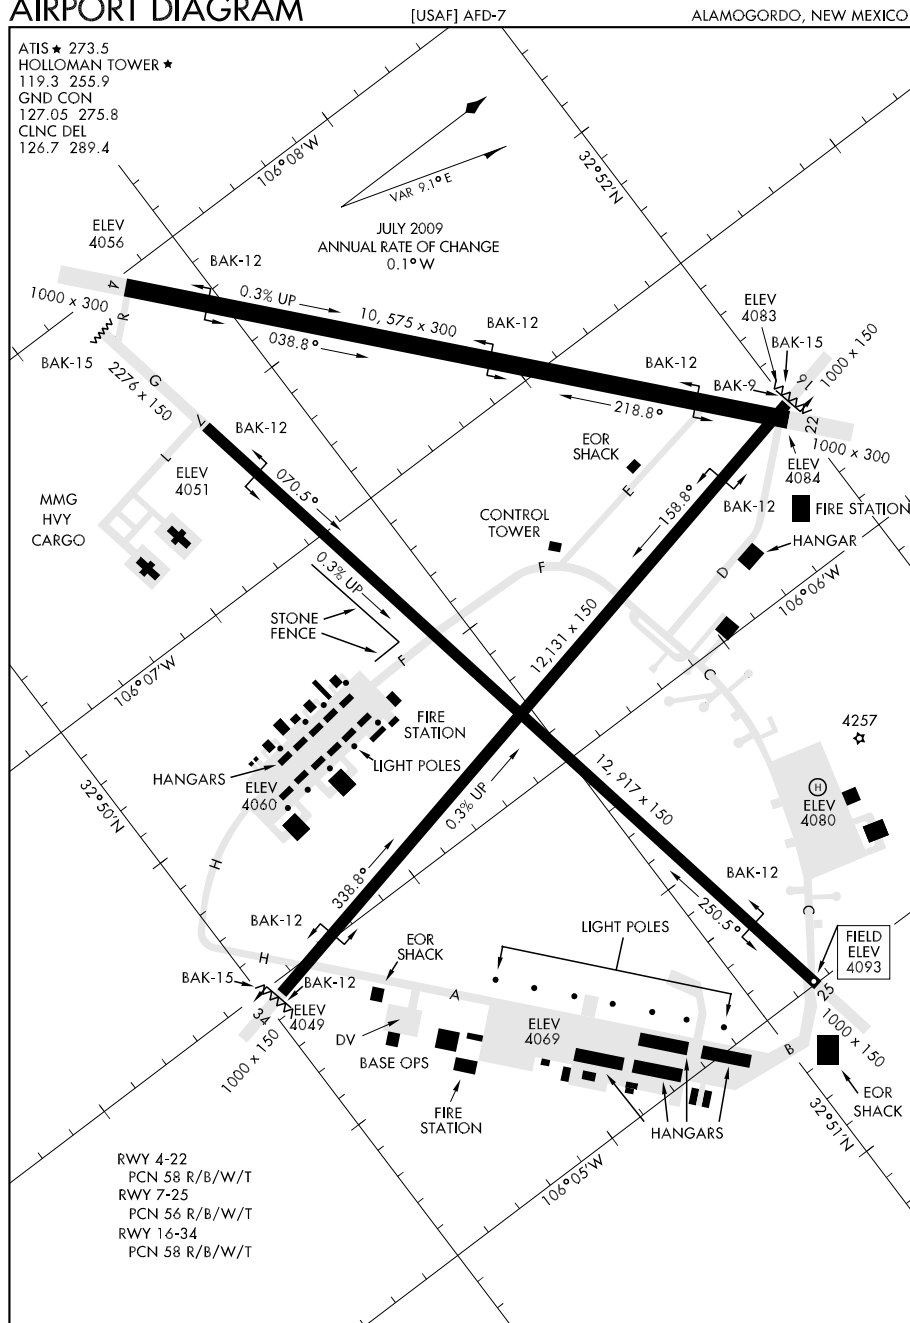

AIRPORT DIAGRAM


ALAMOGORDO, NEW MEXICO

HOLLOMAN AFB (KHMN)

09295

AIRPORT DIAGRAM

AL-9408 (FAA)

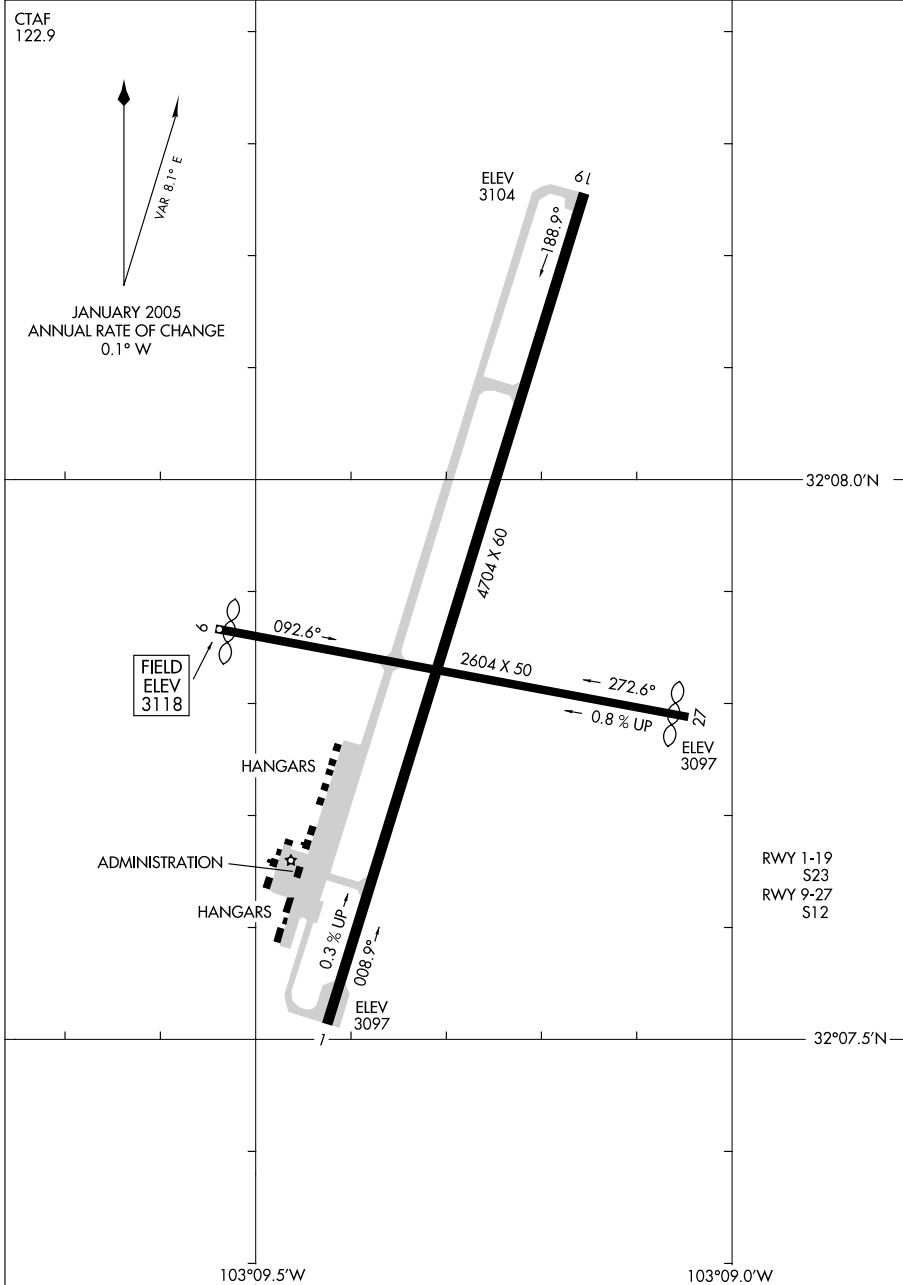JAL/LEA COUNTY (E26)
JAL, NEW MEXICO


AIRPORT DIAGRAM

09295

JAL, NEW MEXICO
JAL/ LEA COUNTY (E26)

09295

AIRPORT DIAGRAM

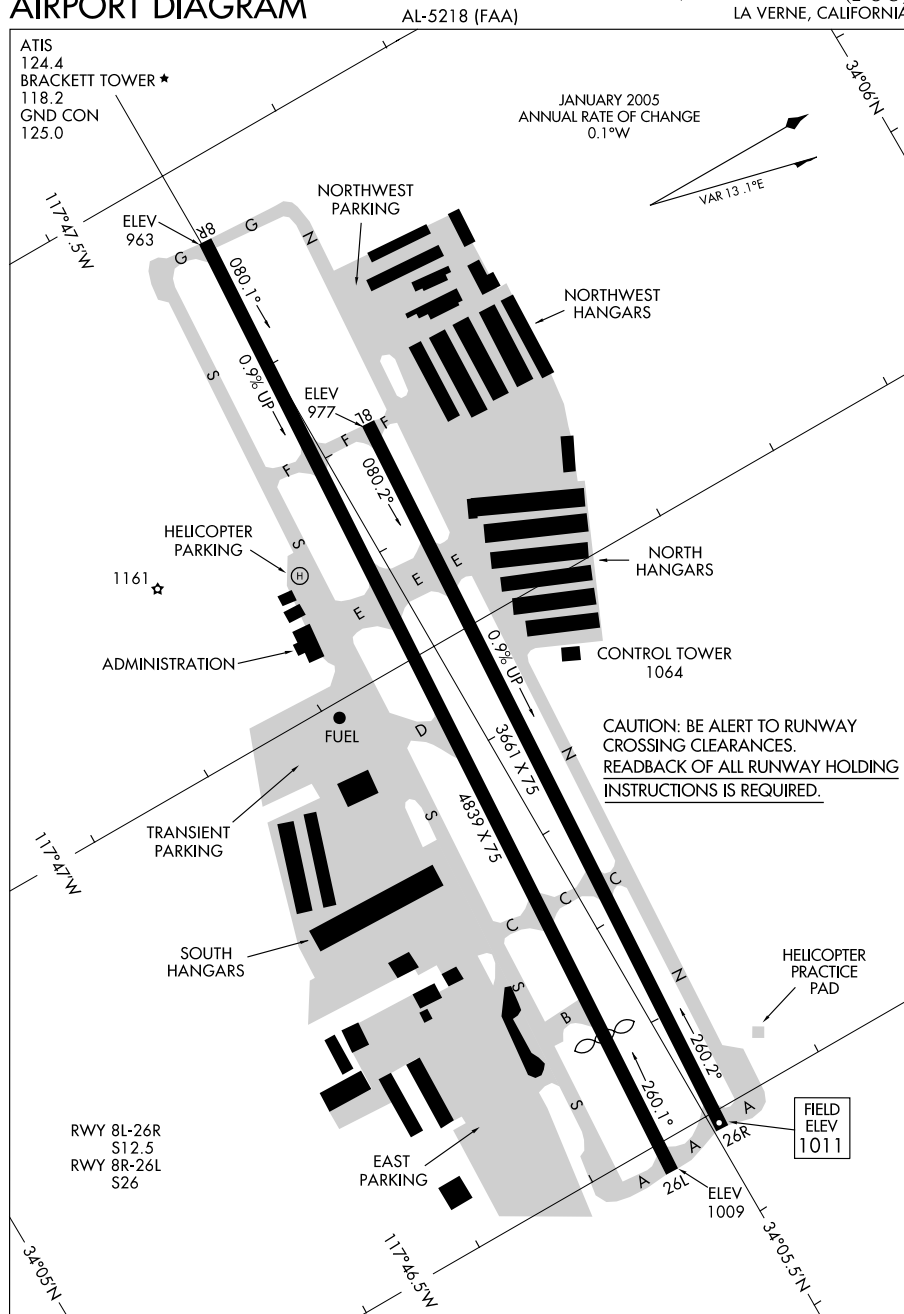LA VERNE/BRACKETT FIELD (POC)
LA VERNE, CALIFORNIA

AIRPORT DIAGRAM

LA VERNE, CALIFORNIA
LA VERNE/BRACKETT FIELD (POC)

09295

09015


AIRPORT DIAGRAM

AFD-6341 [USA]

LAGUNA AAF (KLGf)

YUMA PROVING GROUND, ARIZONA

CTAF
126.20 242.175
GND CON
121.8 229.4

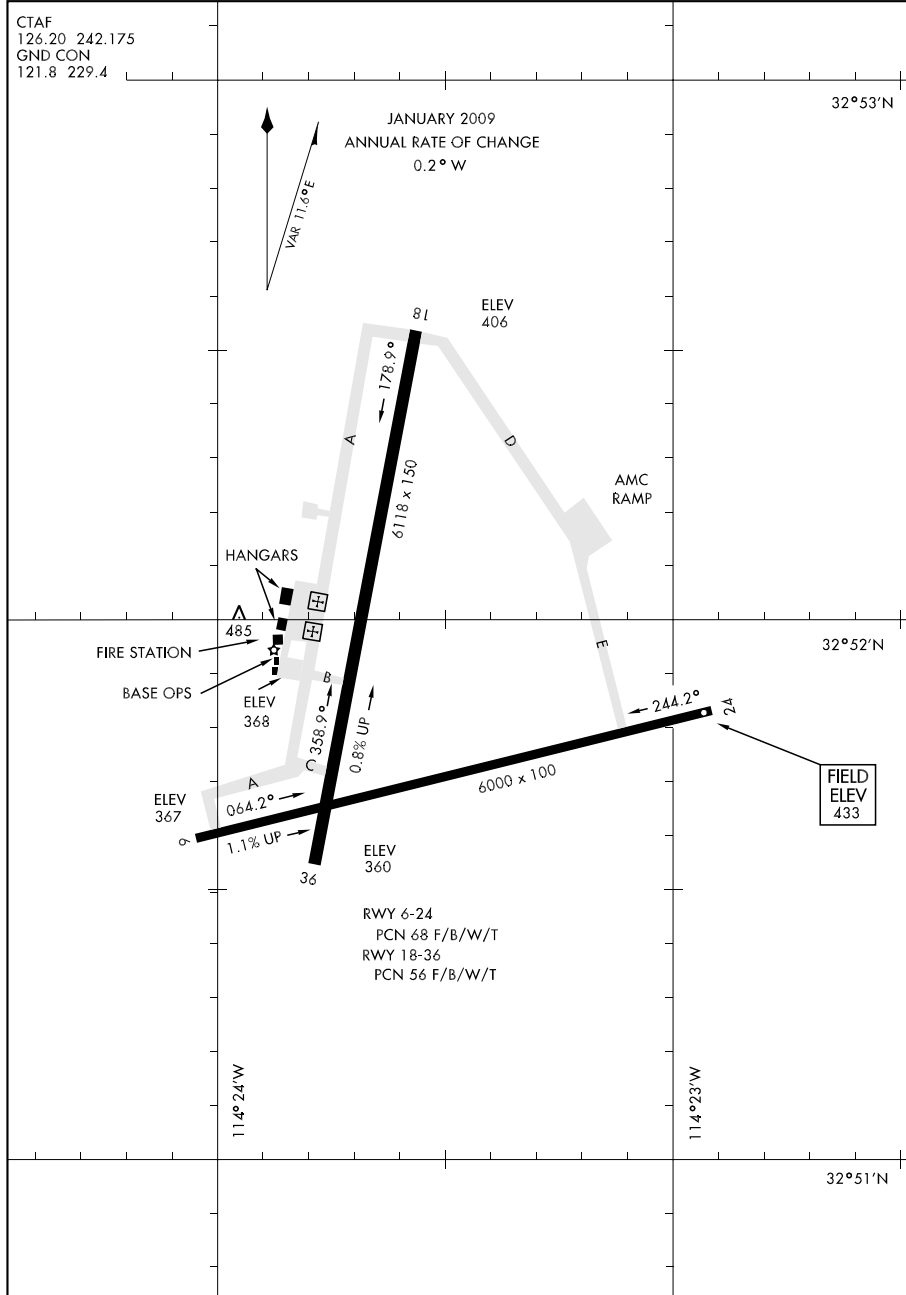

AIRPORT DIAGRAM


YUMA PROVING GROUND, ARIZONA

LAGUNA AAF (KLGf)

07186

AIRPORT DIAGRAM

LANCASTER/ GENERAL WILLIAM J. FOX AIRFIELD (WJF)
AL-5065 (FAA) LANCASTER, CALIFORNIA

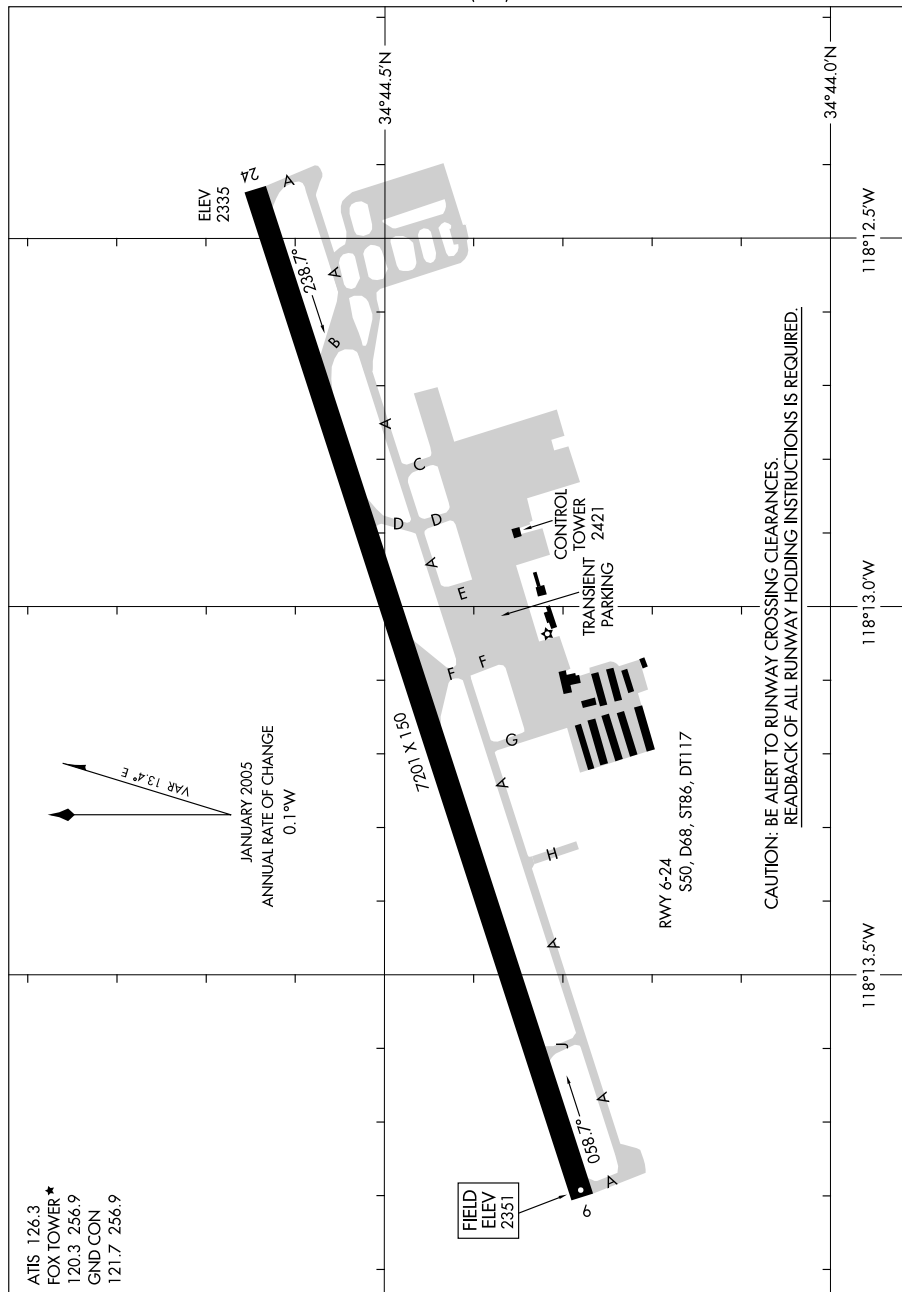

AIRPORT DIAGRAM

07186

LANCASTER, CALIFORNIA
LANCASTER/ GENERAL WILLIAM J. FOX AIRFIELD (WJF)

LAS VEGAS/HENDERSON EXECUTIVE (HND)
LAS VEGAS, NEVADA




09295

AIRPORT DIAGRAM

AL-662 (FAA)

LAS VEGAS/McCARRAN INTL (LAS)

LAS VEGAS, NEVADA

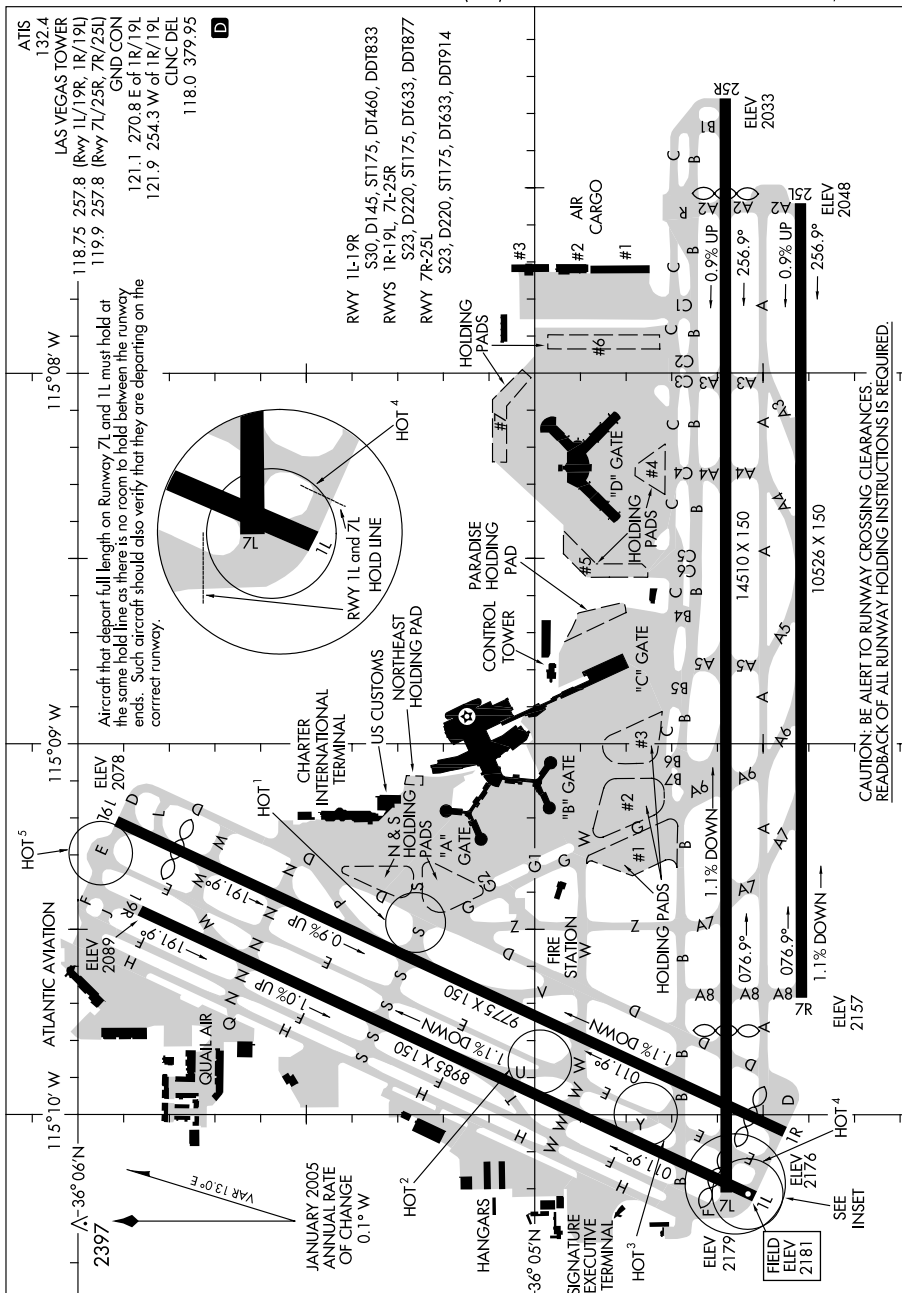

AIRPORT DIAGRAM

09295

LAS VEGAS, NEVADA

LAS VEGAS/McCARRAN INTL (LAS)

AL-6970 (FAA)




08101

AIRPORT DIAGRAM

AFD-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

LEMOORE, CALIFORNIA

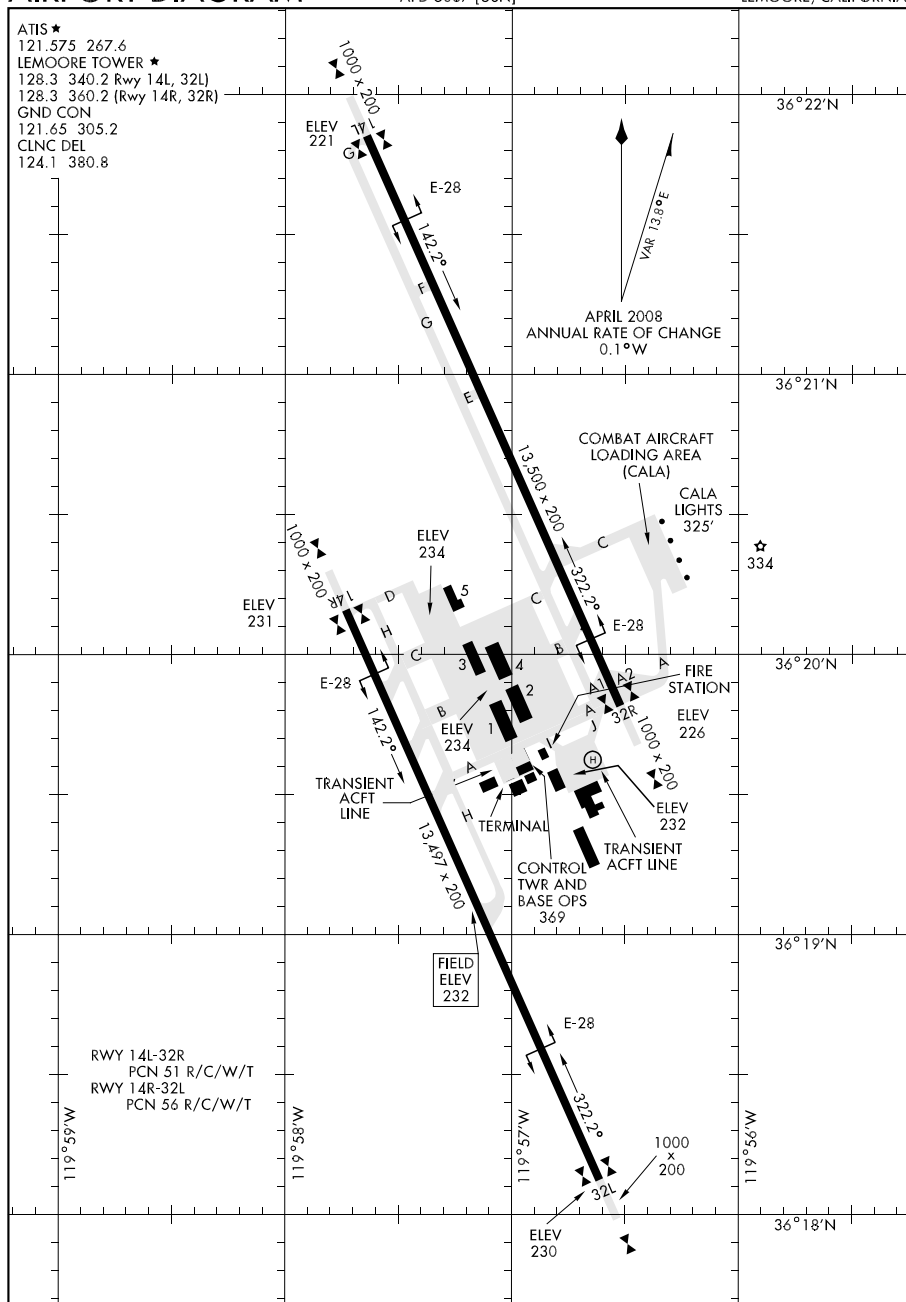

AIRPORT DIAGRAM

LEMOORE, CALIFORNIA


LEMOORE NAS (REEVES FIELD) (KNLC)

09295

AIRPORT DIAGRAM

AL-6075 (FAA)

LIVERMORE MUNI (LVK)
LIVERMORE, CALIFORNIA

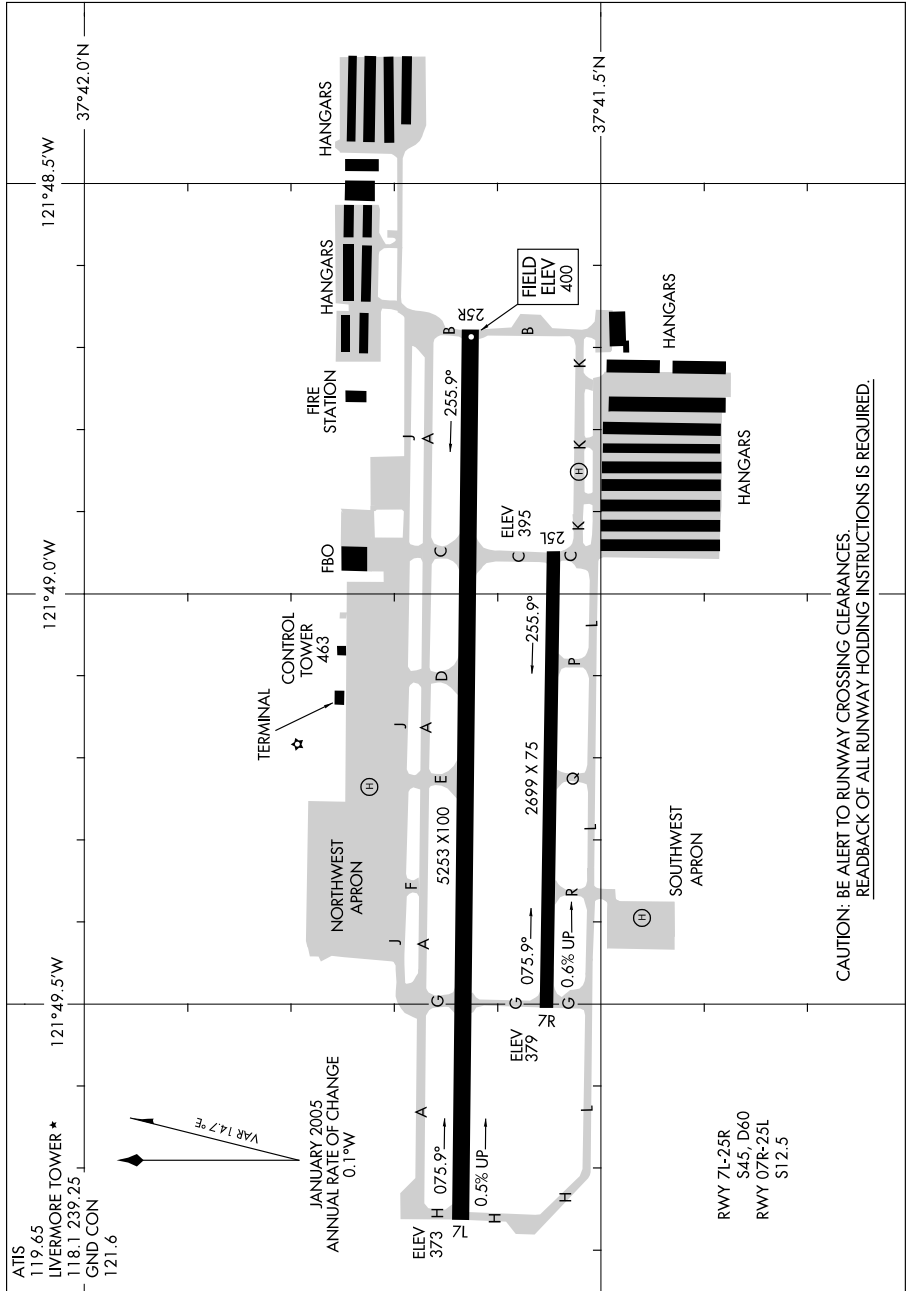

AIRPORT DIAGRAM

LIVERMORE, CALIFORNIA
LIVERMORE MUNI (LVK)

09295


09295

AIRPORT DIAGRAM

AL-236 (FAA)

LONG BEACH (DAUGHERTY FIELD) (LGB)

LONG BEACH, CALIFORNIA

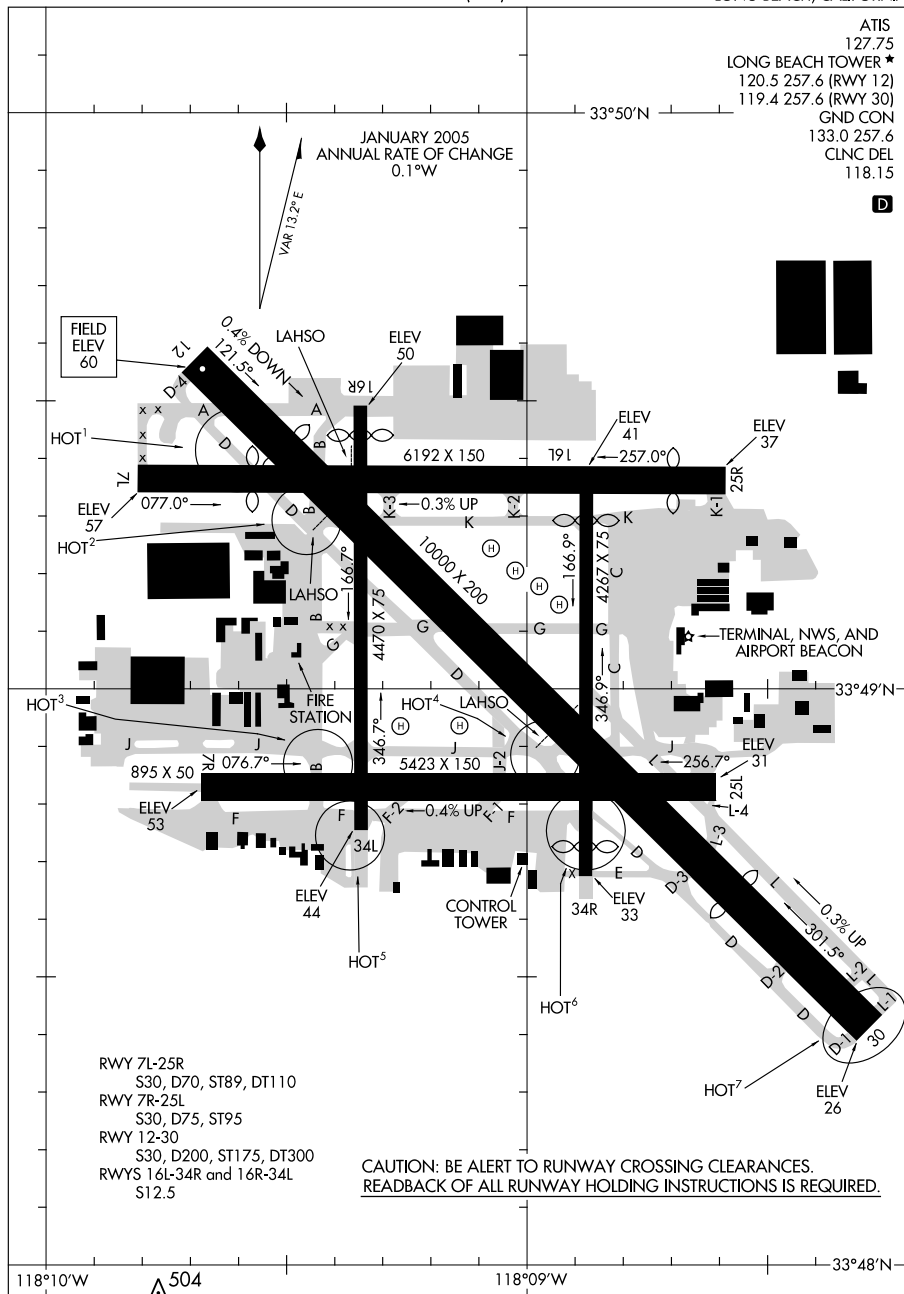

AIRPORT DIAGRAM

09295

LONG BEACH, CALIFORNIA
LONG BEACH (DAUGHERTY FIELD) (LGB)


08101

AIRPORT DIAGRAM

AFD-953 [USA]

LOS ALAMITOS AAF (KSLI)

LOS ALAMITOS, CALIFORNIA

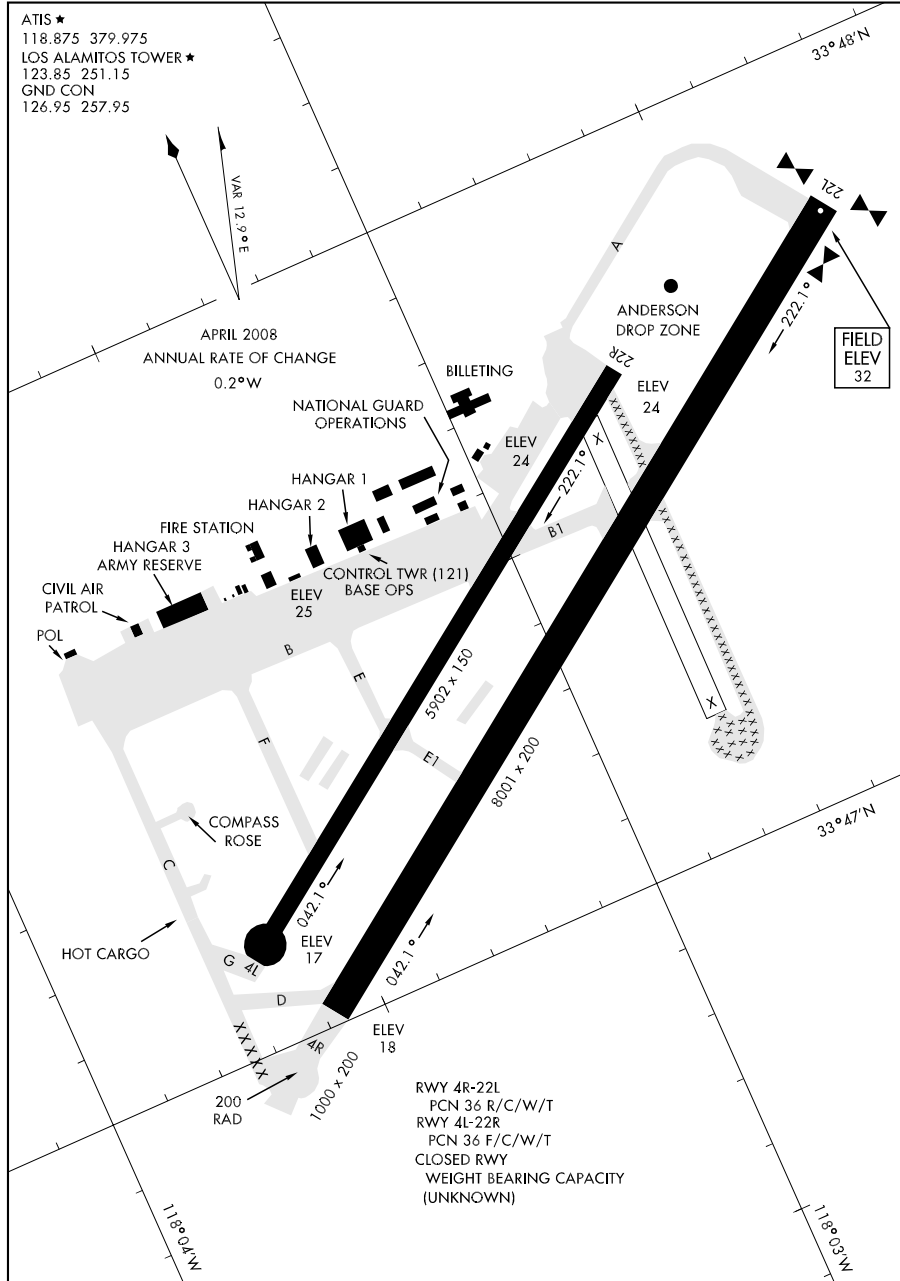

AIRPORT DIAGRAM


LOS ALAMITOS, CALIFORNIA

LOS ALAMITOS AAF (KSLI)

09295

AIRPORT DIAGRAM

AL-9132 (FAA)

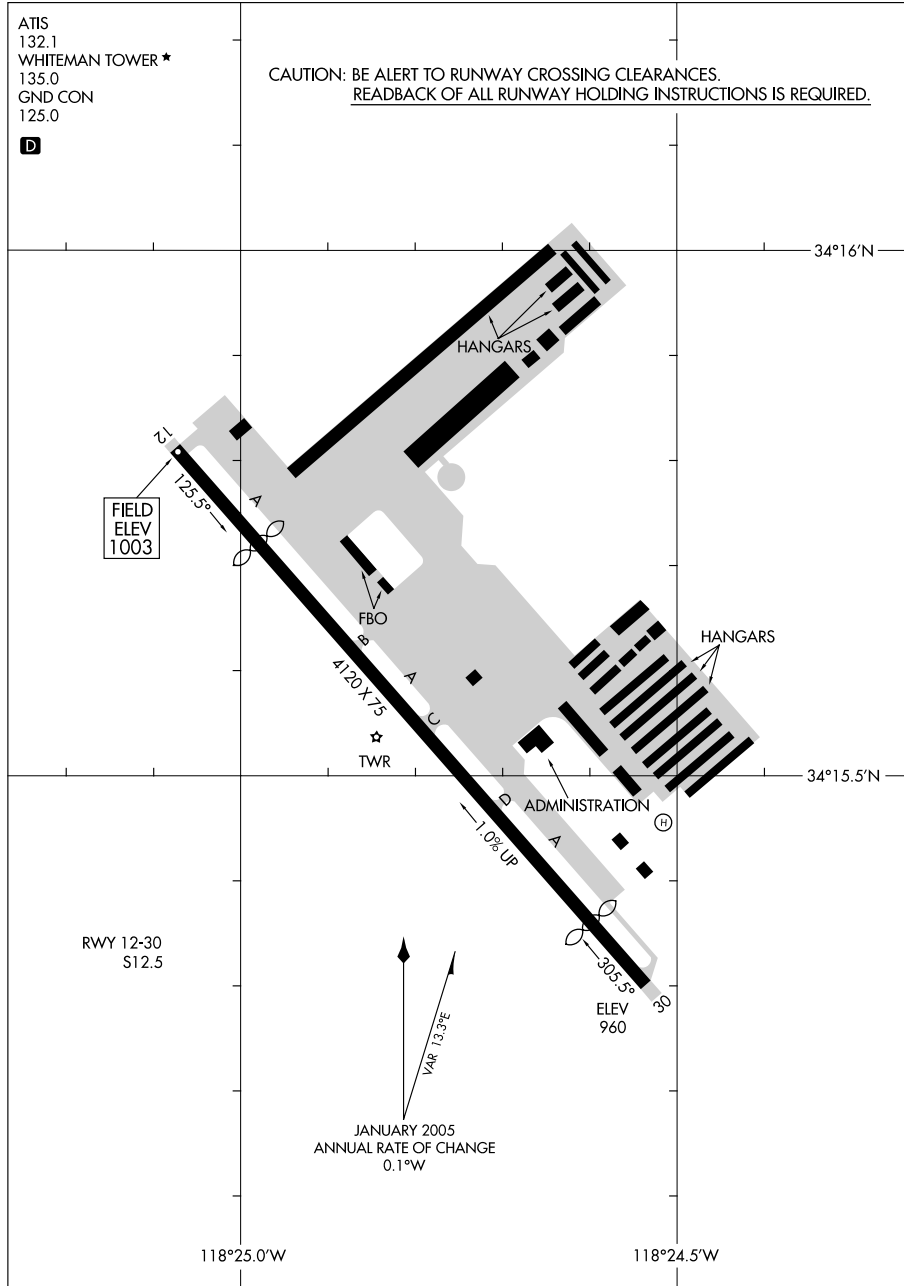LOS ANGELES/WHITEMAN (WHP)
LOS ANGELES, CALIFORNIA

AIRPORT DIAGRAM


09295

LOS ANGELES, CALIFORNIA
LOS ANGELES/WHITEMAN (WHP)

06271

AIRPORT DIAGRAM

LOVINGTON/LEA COUNTY-ZIP FRANKLIN MEMORIAL (E06)
 AL-6951 (FAA) LOVINGTON, NEW MEXICO

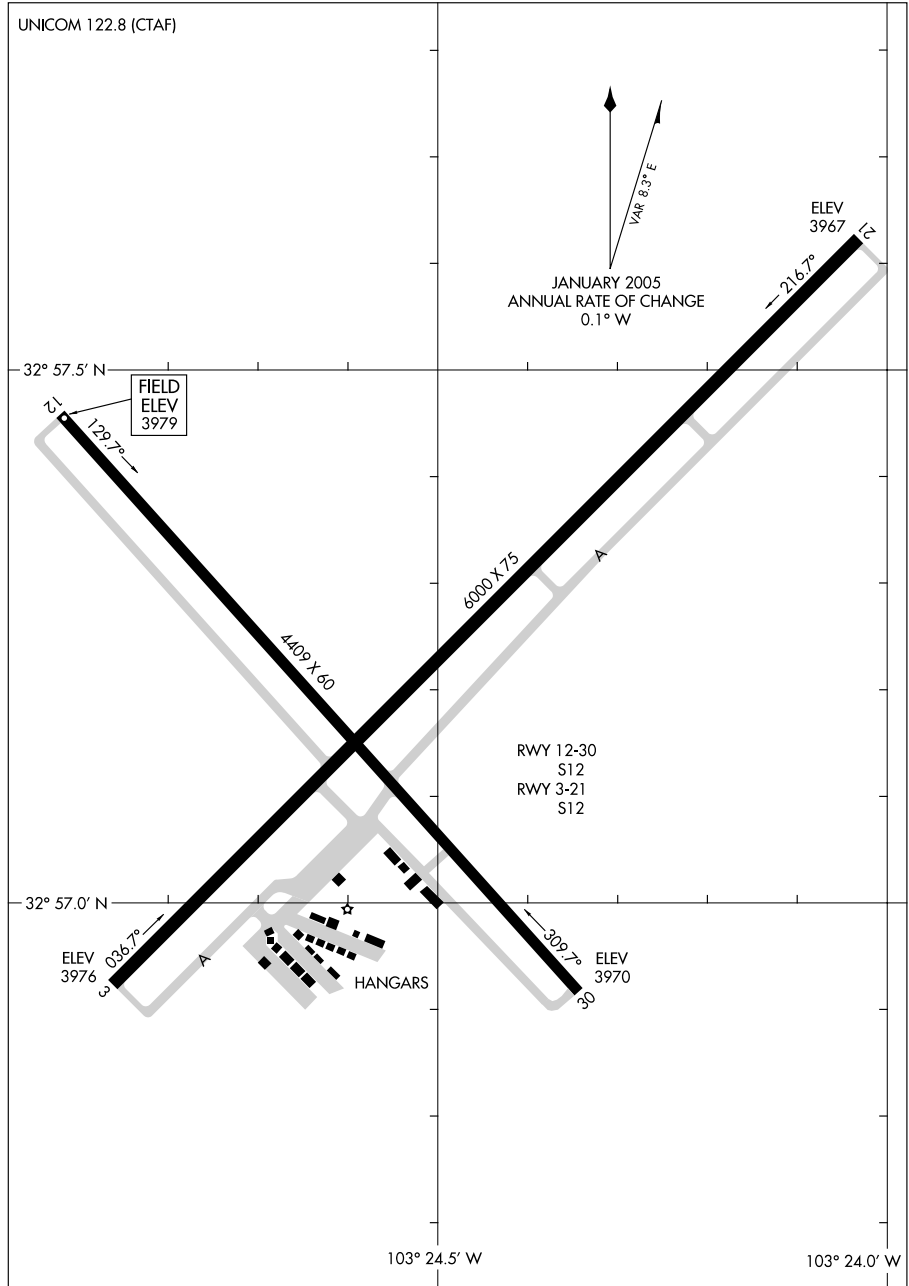


AIRPORT DIAGRAM

06271

LOVINGTON, NEW MEXICO
 LOVINGTON/LEA COUNTY-ZIP FRANKLIN MEMORIAL (E06)

GLENDAL, ARIZONA



SW, 17 DEC 2009 to 11 FEB 2010


09351

AIRPORT DIAGRAM

AFD-348 [USAF]

MARCH ARB (KRIV)

RIVERSIDE, CALIFORNIA

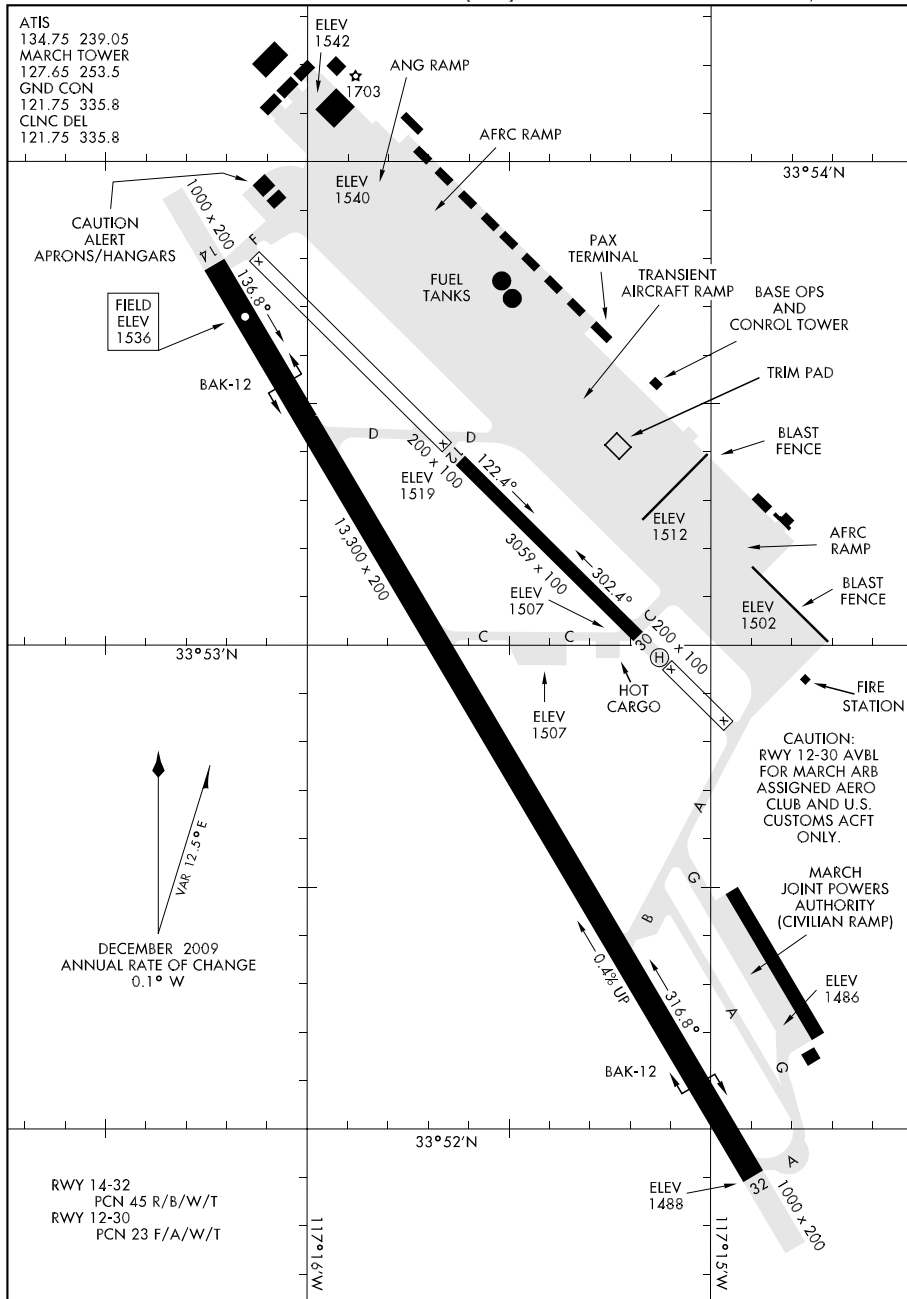

AIRPORT DIAGRAM


RIVERSIDE, CALIFORNIA

MARCH ARB (KRIV)

09295

AIRPORT DIAGRAM

AL-568 (FAA)

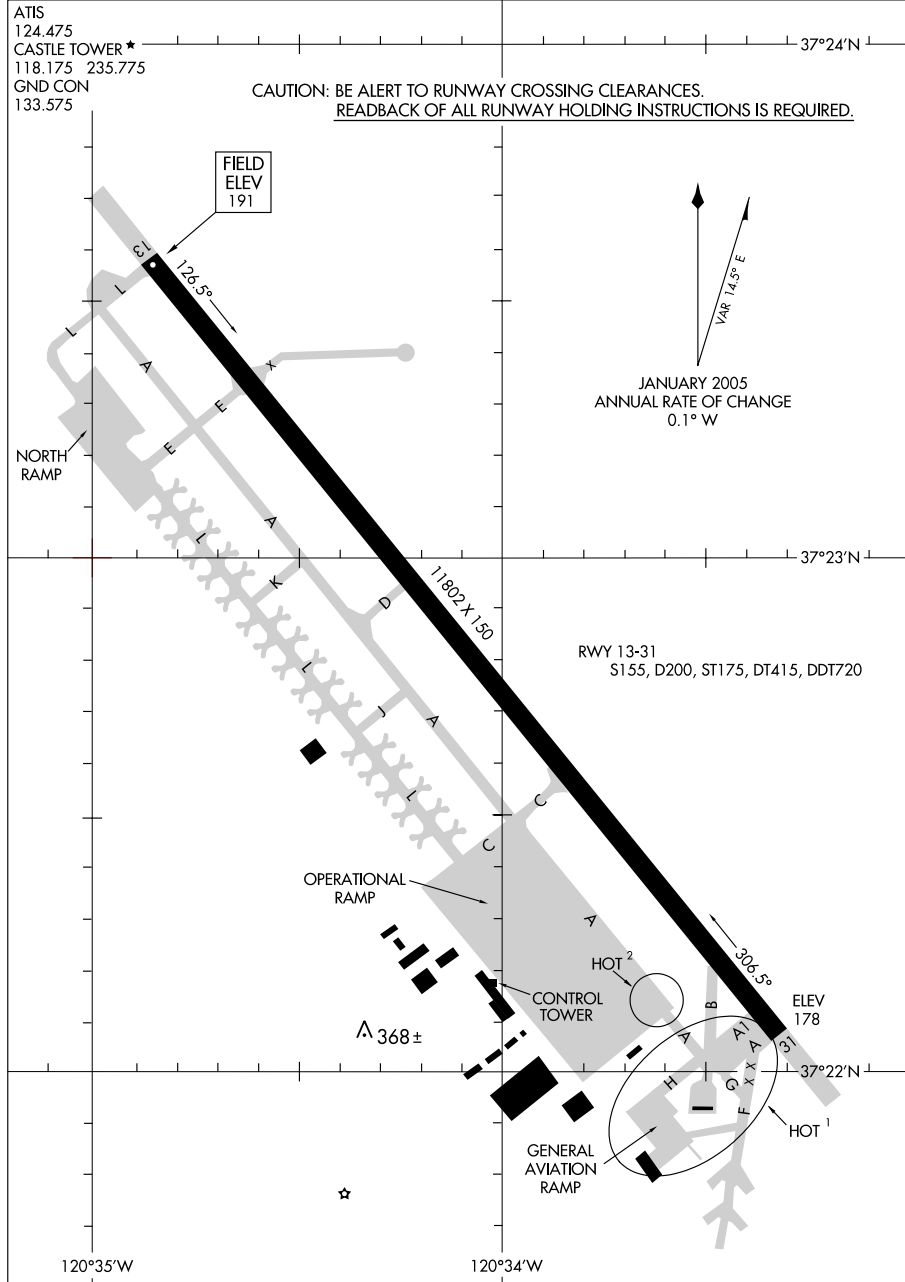MERCED/CASTLE (MER)
MERCED, CALIFORNIA

AIRPORT DIAGRAM

09295

MERCED, CALIFORNIA
MERCED/CASTLE (MER)


09295

AIRPORT DIAGRAM

AL-6647 (FAA)

MESA/ FALCON FIELD (F'F'Z)

MESA, ARIZONA

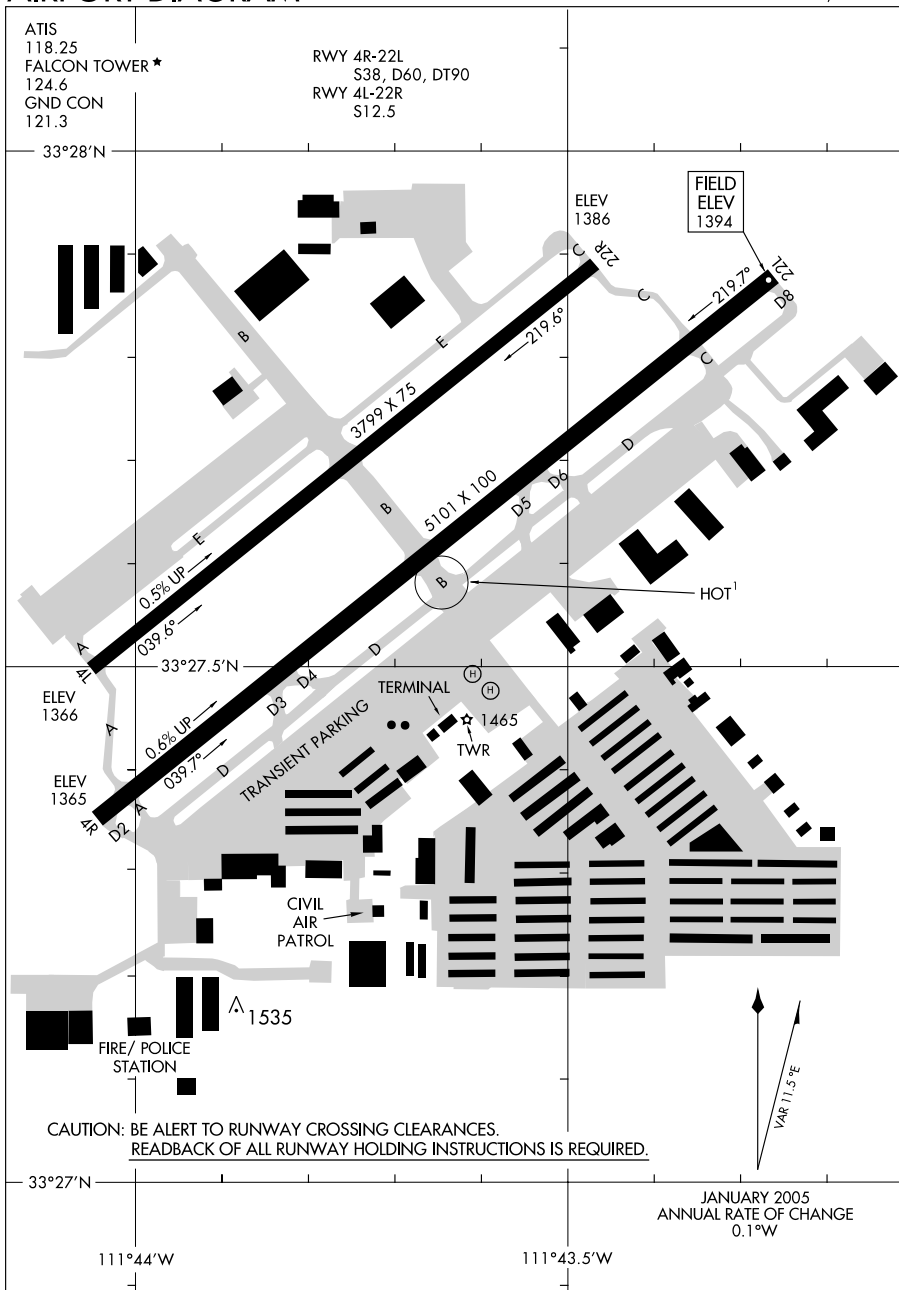

AIRPORT DIAGRAM

09295

MESA, ARIZONA
MESA/ FALCON FIELD (F'F'Z)


08101

AIRPORT DIAGRAM

AFD-5071 [USA]

MICHAEL AAF (KDPG)

DUGWAY PROVING GROUND, UTAH

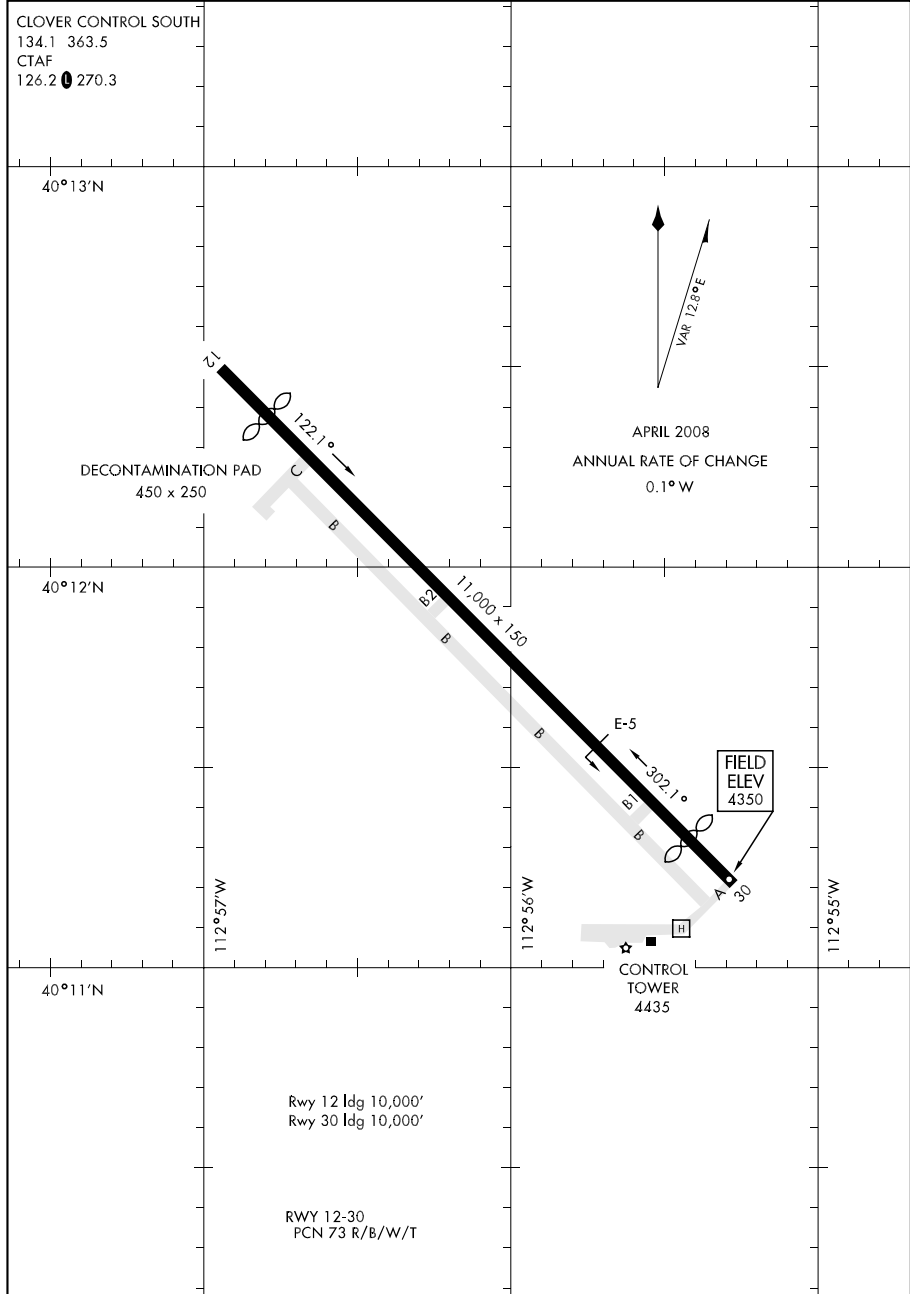

AIRPORT DIAGRAM

DUGWAY PROVING GROUND, UTAH

MICHAEL AAF (KDPG)

09351

AIRPORT DIAGRAM

AL-903 [USN]

MIRAMAR MCAS (MITSCHER FLD) (KNKX)


SAN DIEGO, CALIFORNIA

MIRAMAR SOUTH (JET) FREQUENCIES

ATIS ★
 352.0
 MIRAMAR SOUTH (JET) TOWER ★
 135.2 298.925
 GND CON
 128.625 307.325
 CLNC DEL
 125.975 254.325
 PTD
 335.625

117°10'W

DECEMBER 2009
 ANNUAL RATE OF CHANGE
 0.1° W



117°09'W

RWY 6L - 24R
 PCN 53 R/B/W/T
 RWY 6R - 24L
 PCN 76 R/B/W/T
 RWY 10-28
 PCN 72 R/B/W/T

NOTE: RWY 10 NOT AVAILABLE
 RWY 28 RESTRICTED USE ONLY

117°08'W



STRATEGIC
 PARKING AREA

HELICOPTER STRIP
 (LHD)

MIRAMAR NORTH (HELO) FREQUENCIES

ATIS (HELO) ★
 352.0
 GND CON (HELO)
 377.15
 MIRAMAR NORTH
 (HELO) TOWER ★
 327.025

CALA PAD
 30,000 lbs

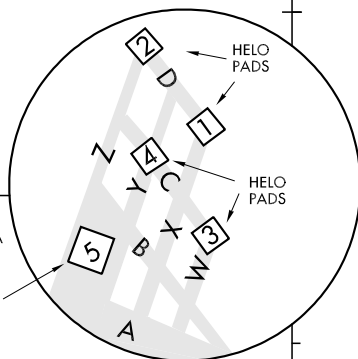

32°53'N

AIRPORT DIAGRAM


SAN DIEGO, CALIFORNIA

MIRAMAR MCAS (MITSCHER FLD) (KNKX)

08045

AIRPORT DIAGRAM

MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)
AL-643 (FAA) MODESTO, CALIFORNIA

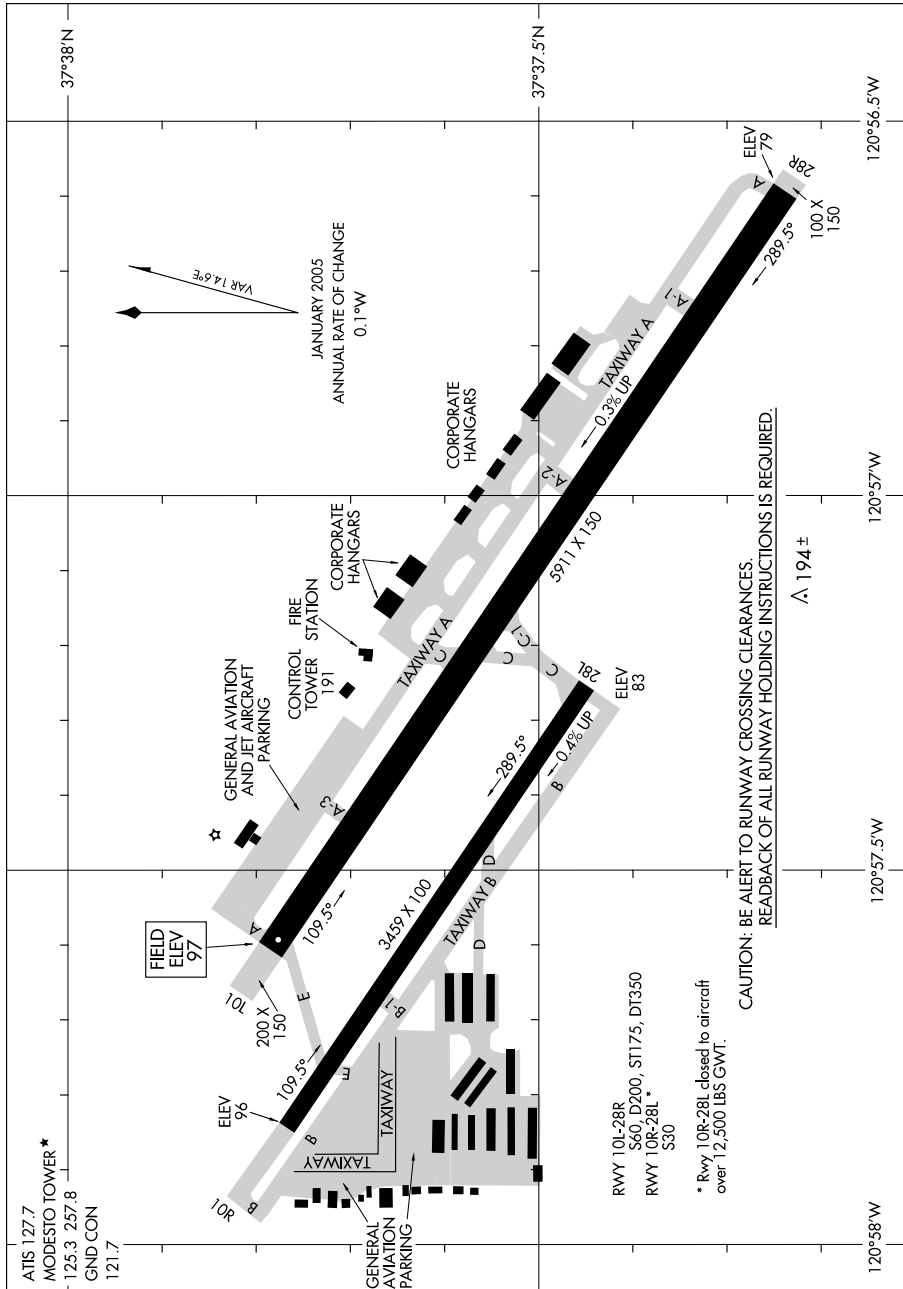

AIRPORT DIAGRAM

08045


MODESTO, CALIFORNIA
MODESTO CITY-COUNTY-HARRY SHAM FIELD (MOD)

09295

AIRPORT DIAGRAM

AL-9353 (FAA)

MOJAVE (MHV)
MOJAVE, CALIFORNIA

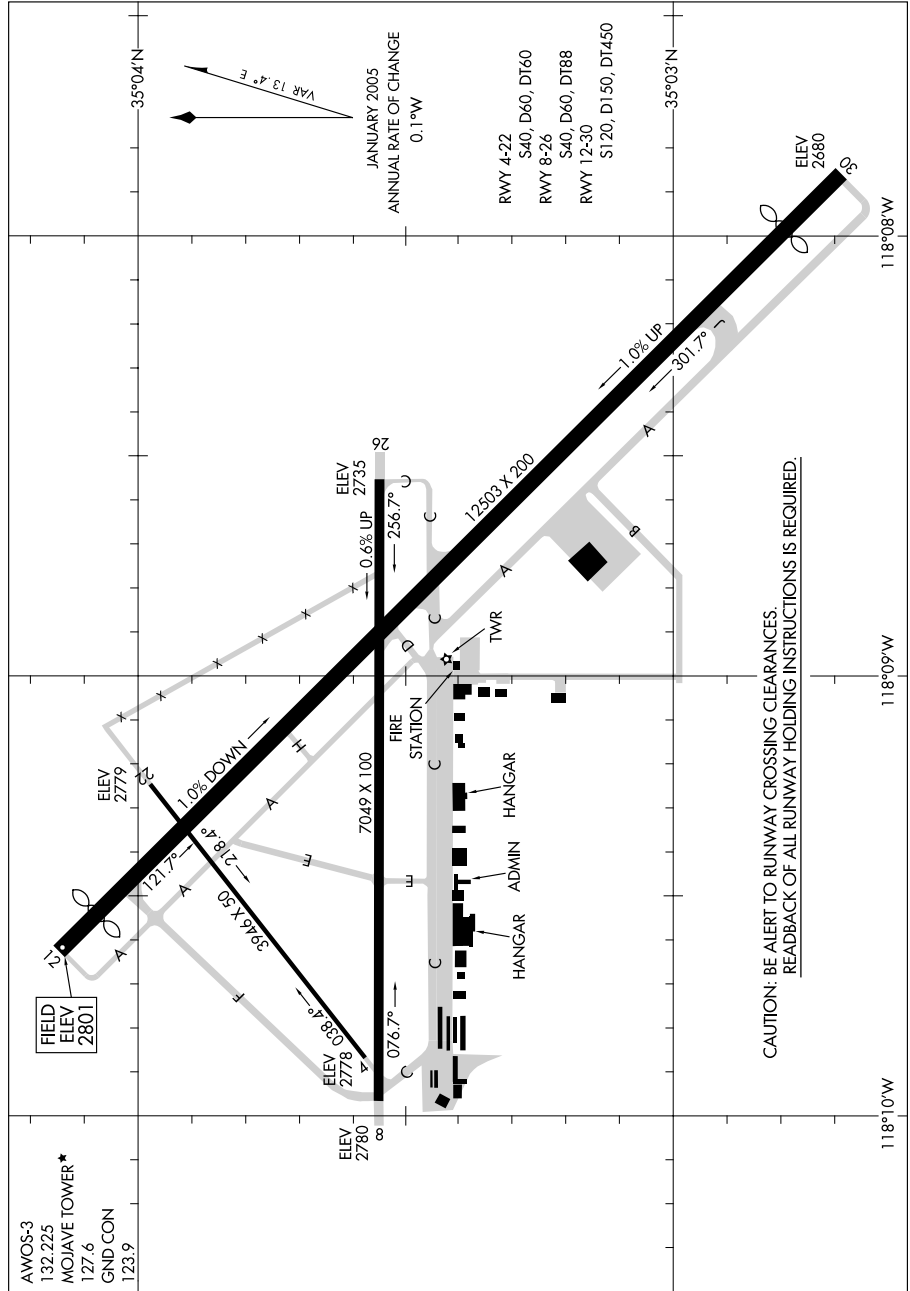

AIRPORT DIAGRAM

09295


MOJAVE, CALIFORNIA
MOJAVE (MHV)

09071

AIRPORT DIAGRAM

AL-271 (FAA)

MONTEREY PENINSULA (MRY)
MONTEREY, CALIFORNIA

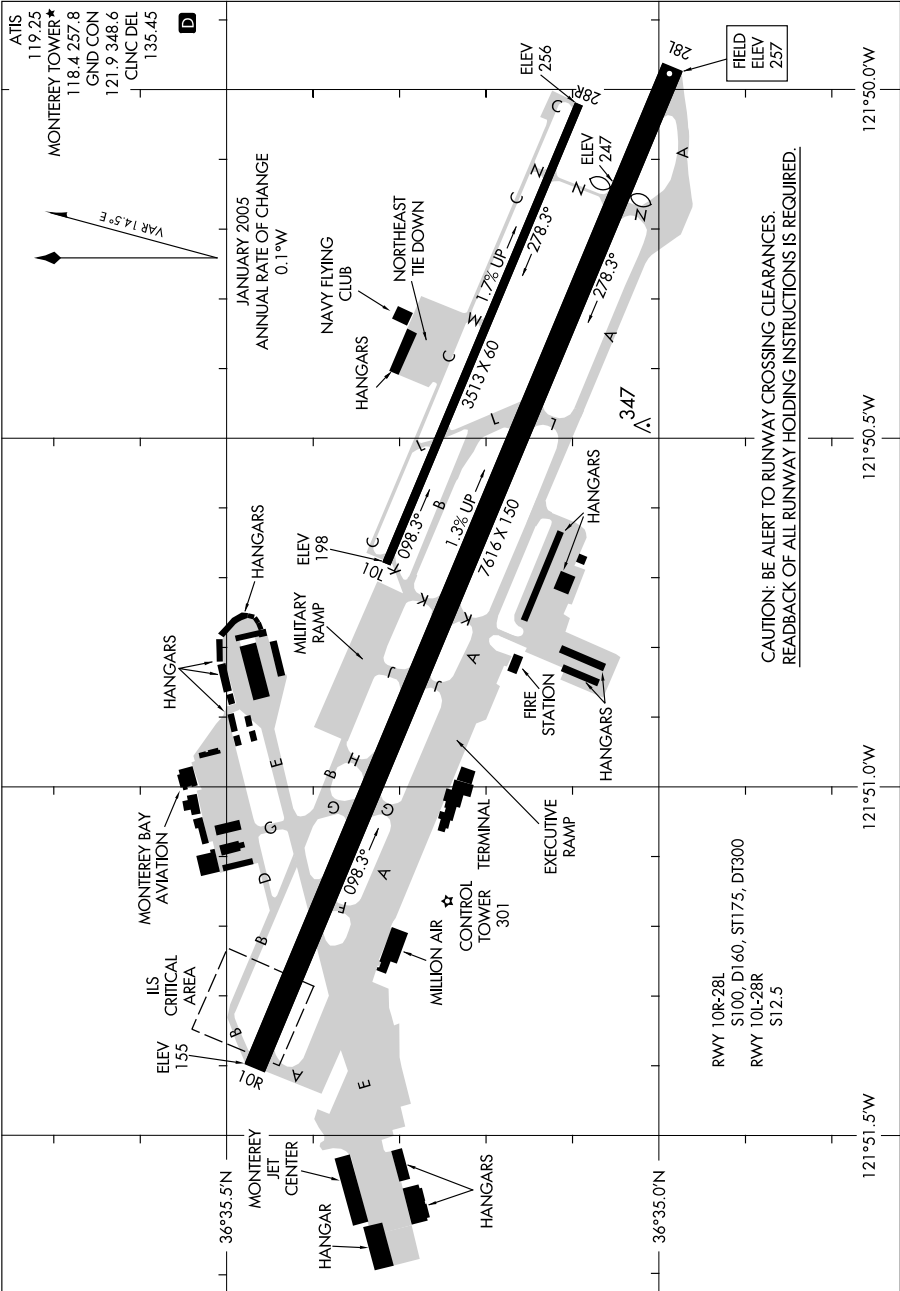

AIRPORT DIAGRAM

MONTEREY, CALIFORNIA
MONTEREY PENINSULA (MRY)

09071

09071

AIRPORT DIAGRAM

MOUNTAIN VIEW/MOFFETT FEDERAL AIRFIELD (NTUQ)

AL-410 (FAA)

MOUNTAIN VIEW, CALIFORNIA

ATIS

124.175 283.0

MOFFETT TOWER ★

119.55 346.25

GND CON


121.85 336.4

CINC DEL

380.8

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.

READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

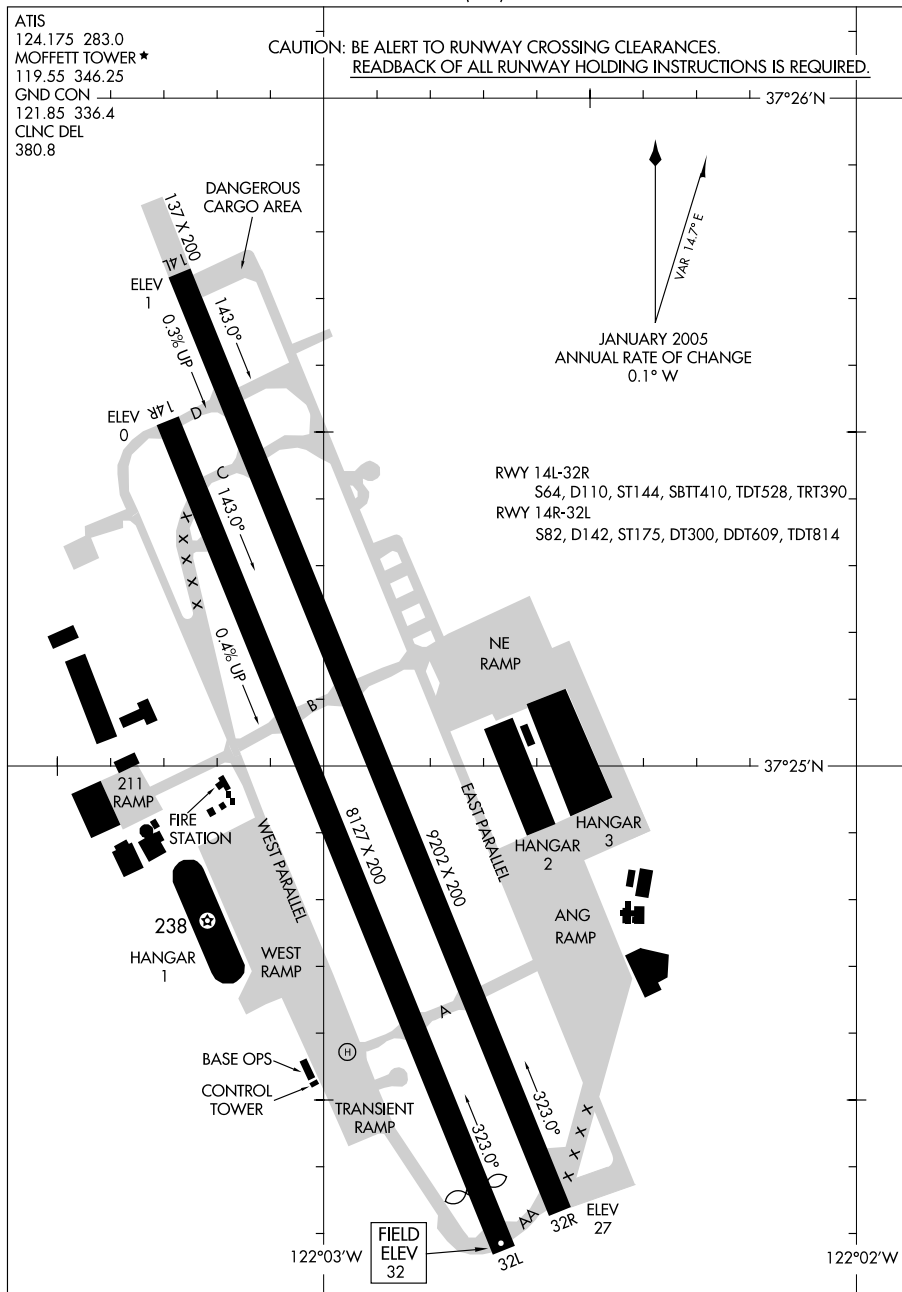

AIRPORT DIAGRAM


09071

MOUNTAIN VIEW, CALIFORNIA
MOUNTAIN VIEW/MOFFETT FEDERAL AIRFIELD (NTUQ)

09183

AIRPORT DIAGRAM

AL-281 (FAA)

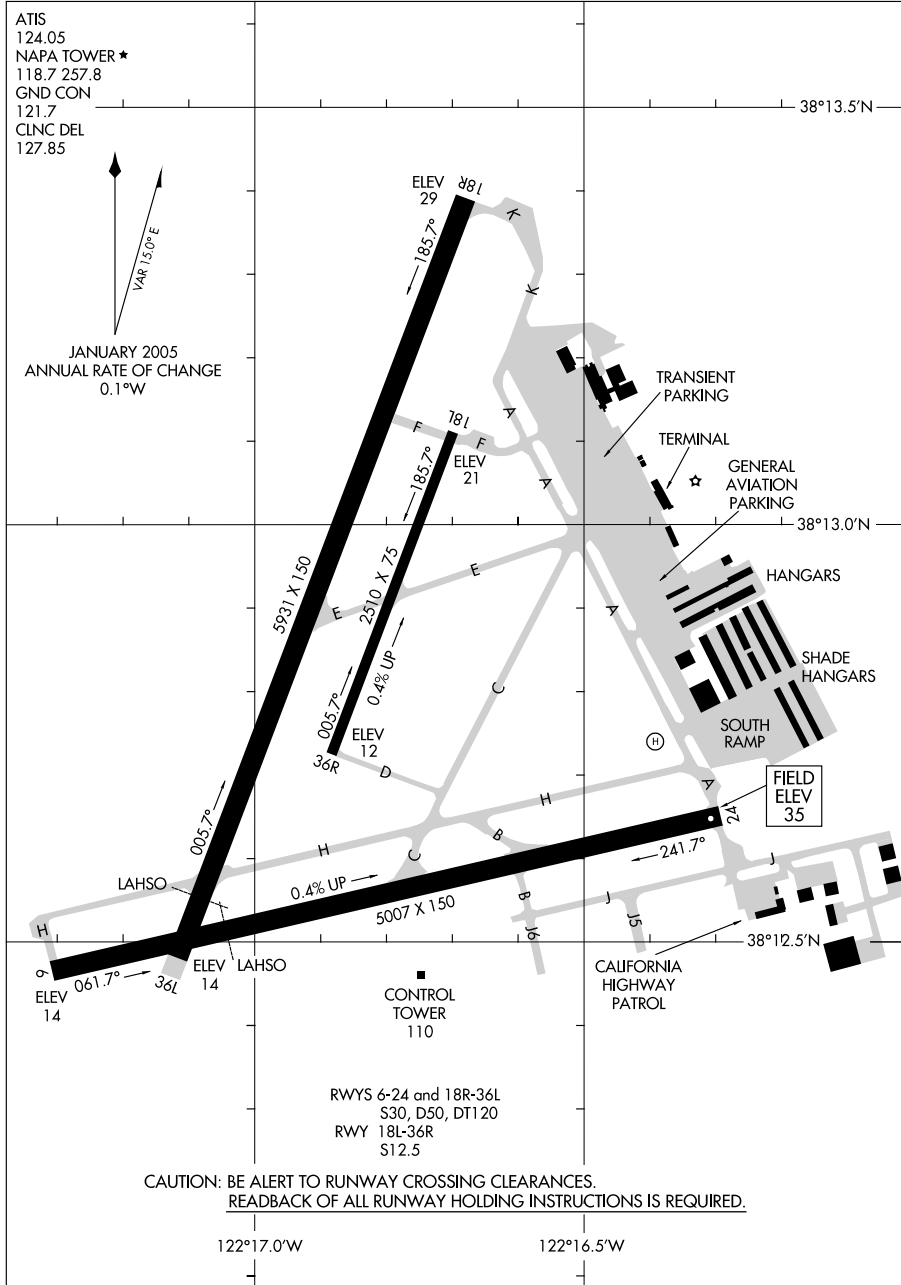NAPA COUNTY (APC)
NAPA, CALIFORNIA

AIRPORT DIAGRAM

09183

NAPA, CALIFORNIA
NAPA COUNTY (APC)


09239

AIRPORT DIAGRAM

AFD-227 [USAF]

NELLIS AFB (KLSV)

LAS VEGAS, NEVADA

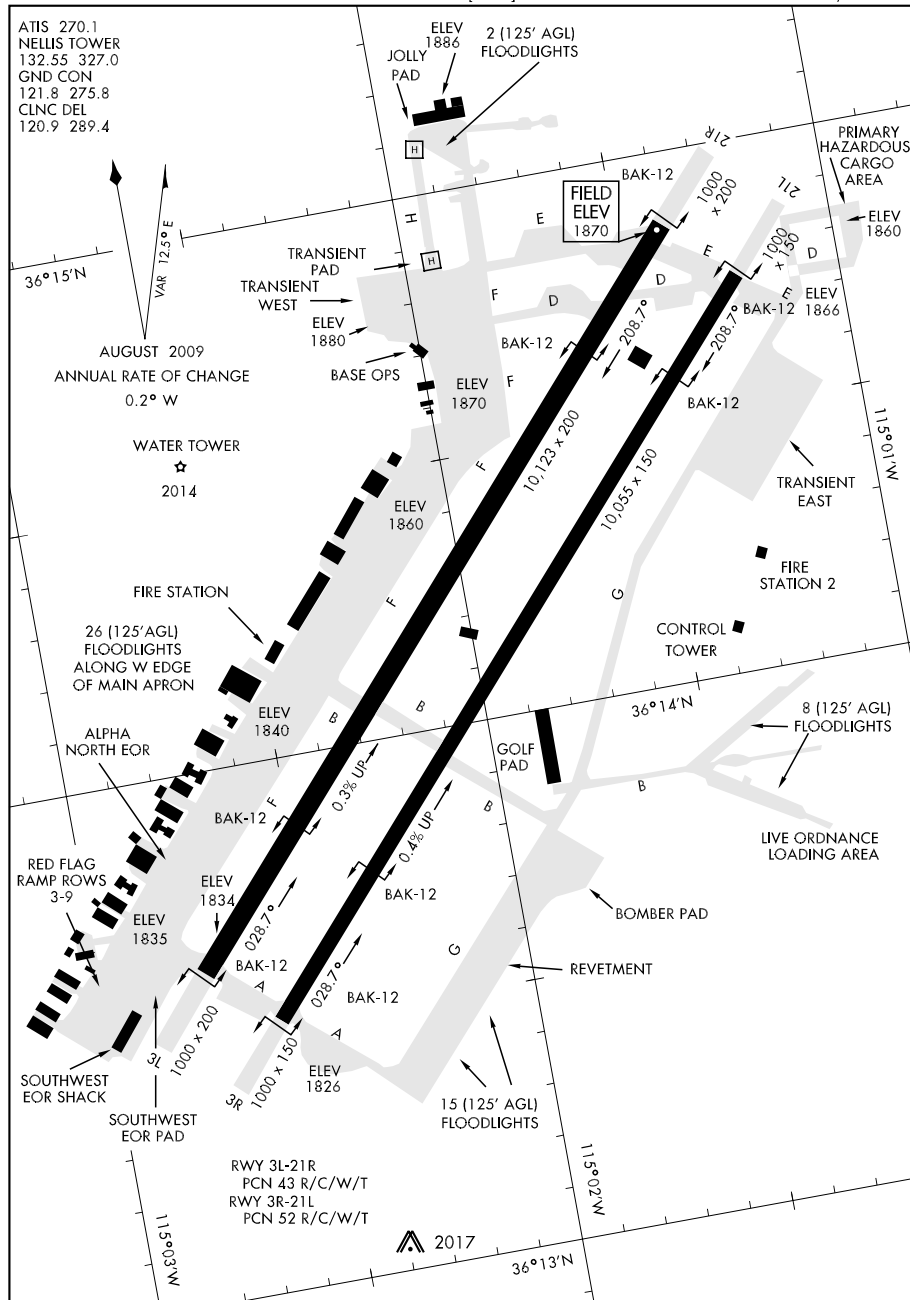


09127

NORTH ISLAND NAS (HALSEY FIELD) (KNZY)

AIRPORT DIAGRAM

AFD-374 [USN]

SAN DIEGO, CALIFORNIA

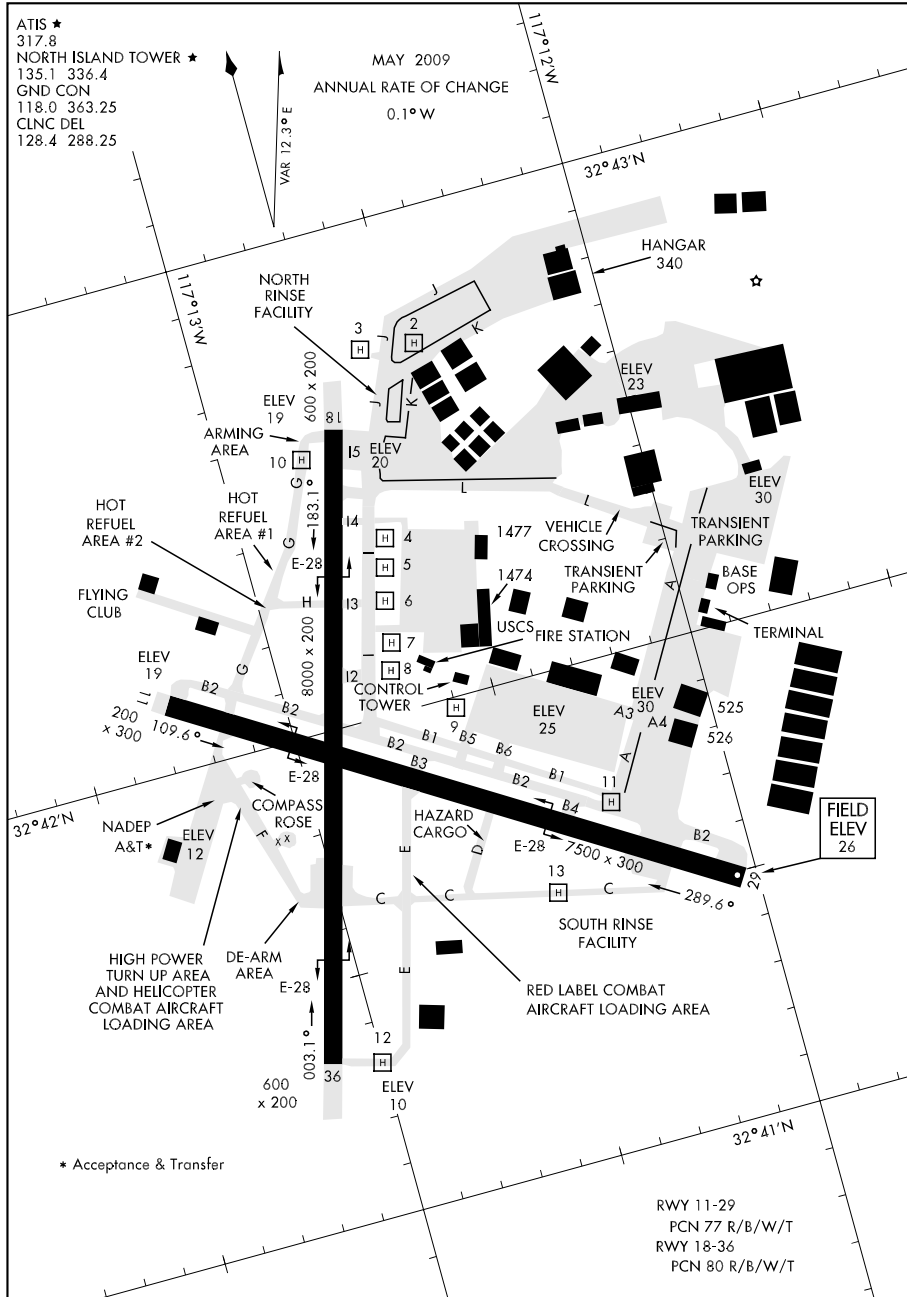

AIRPORT DIAGRAM

SAN DIEGO, CALIFORNIA
NORTH ISLAND NAS (HALSEY FIELD) (KNZY)


09295

AIRPORT DIAGRAM

OAKLAND/METROPOLITAN OAKLAND INTL (OAK)

AL-294 (FAA)

OAKLAND, CALIFORNIA

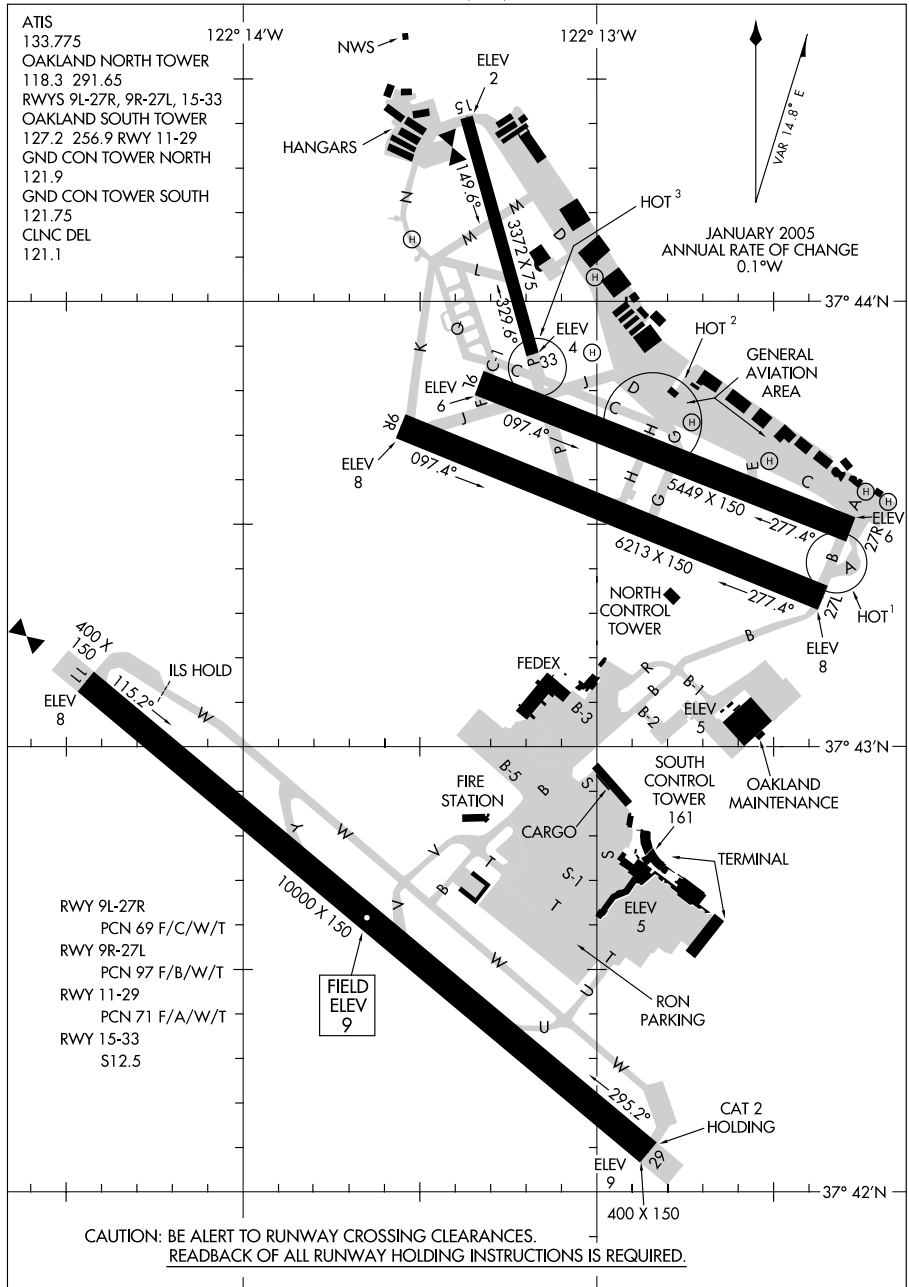

AIRPORT DIAGRAM

OAKLAND, CALIFORNIA

OAKLAND/METROPOLITAN OAKLAND INTL (OAK)


09295

SW, 17 DEC 2009 to 11 FEB 2010

09351

AIRPORT DIAGRAM

AL-297 (FAA)

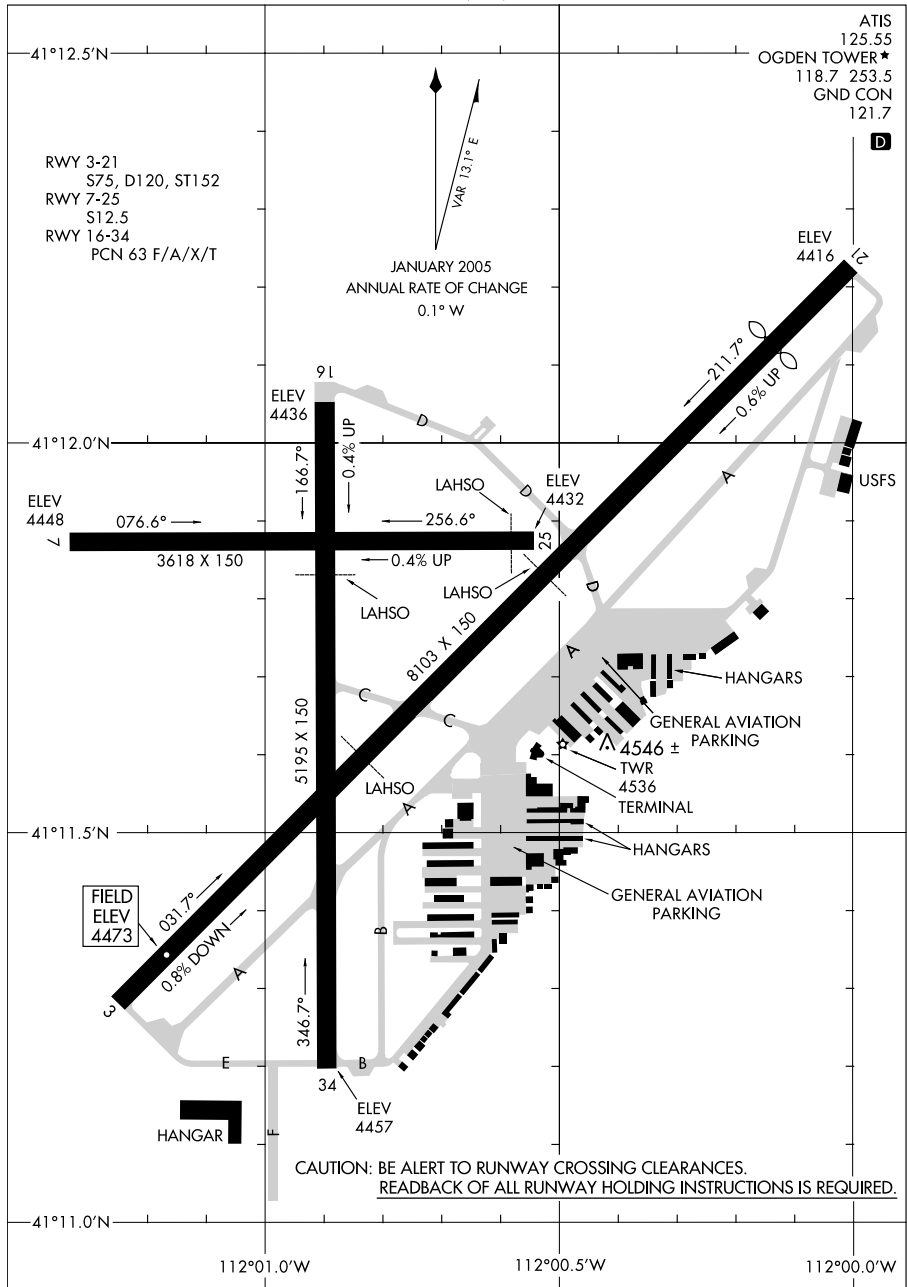OGDEN-HINCKLEY (OGD)
OGDEN, UTAH

AIRPORT DIAGRAM


09351

OGDEN, UTAH
OGDEN-HINCKLEY (OGD)

09239

AIRPORT DIAGRAM

AL-965 (FAA)

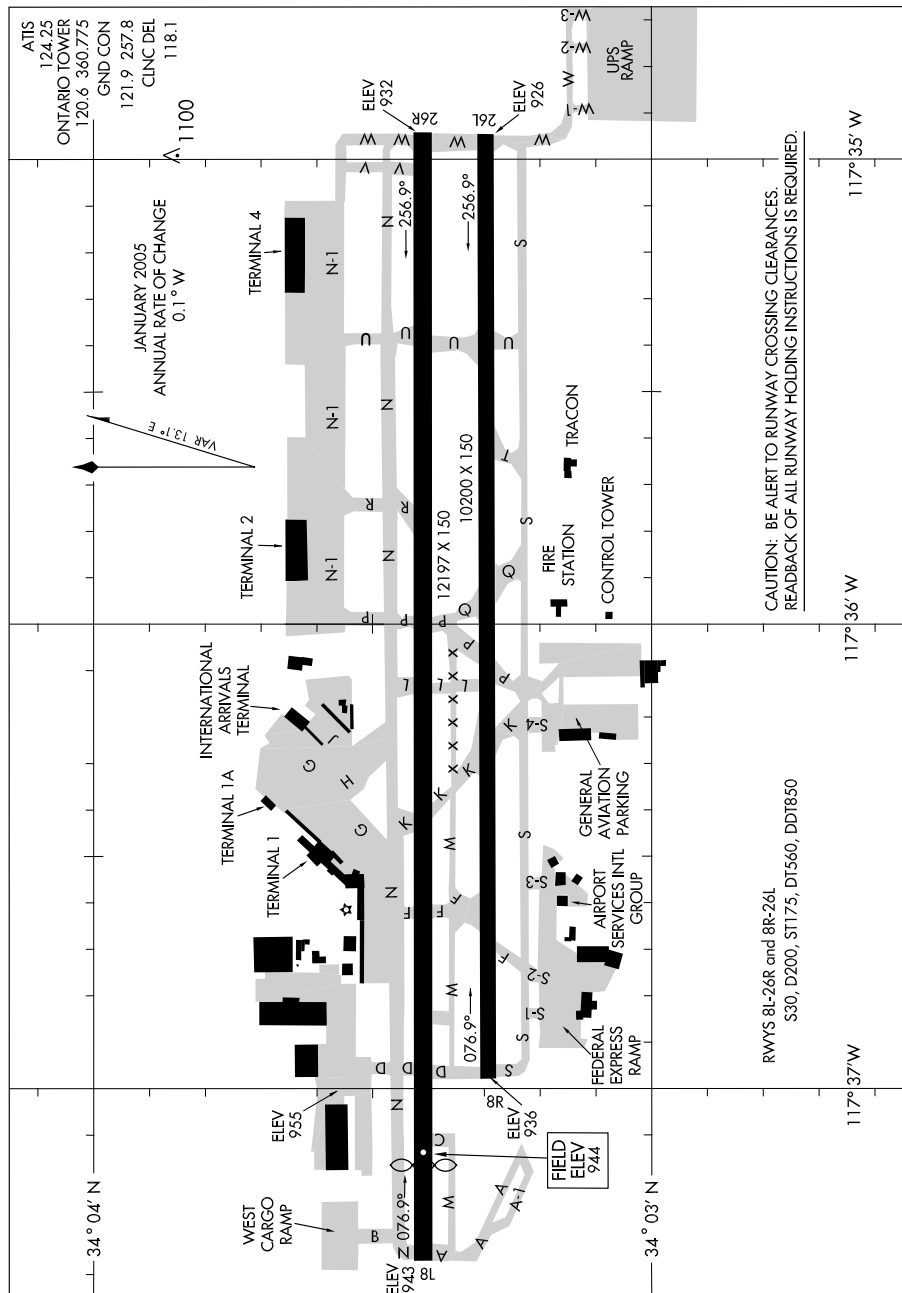ONTARIO INTL (ONT)
ONTARIO, CALIFORNIA

AIRPORT DIAGRAM

09239

ONTARIO, CALIFORNIA
ONTARIO INTL (ONT)


08325

AIRPORT DIAGRAM

AL-674 (FAA)

OXNARD (OXR)
OXNARD, CALIFORNIA

ATIS 118.05
OXNARD TOWER ★
134.95 257.8
GND CON
121.9

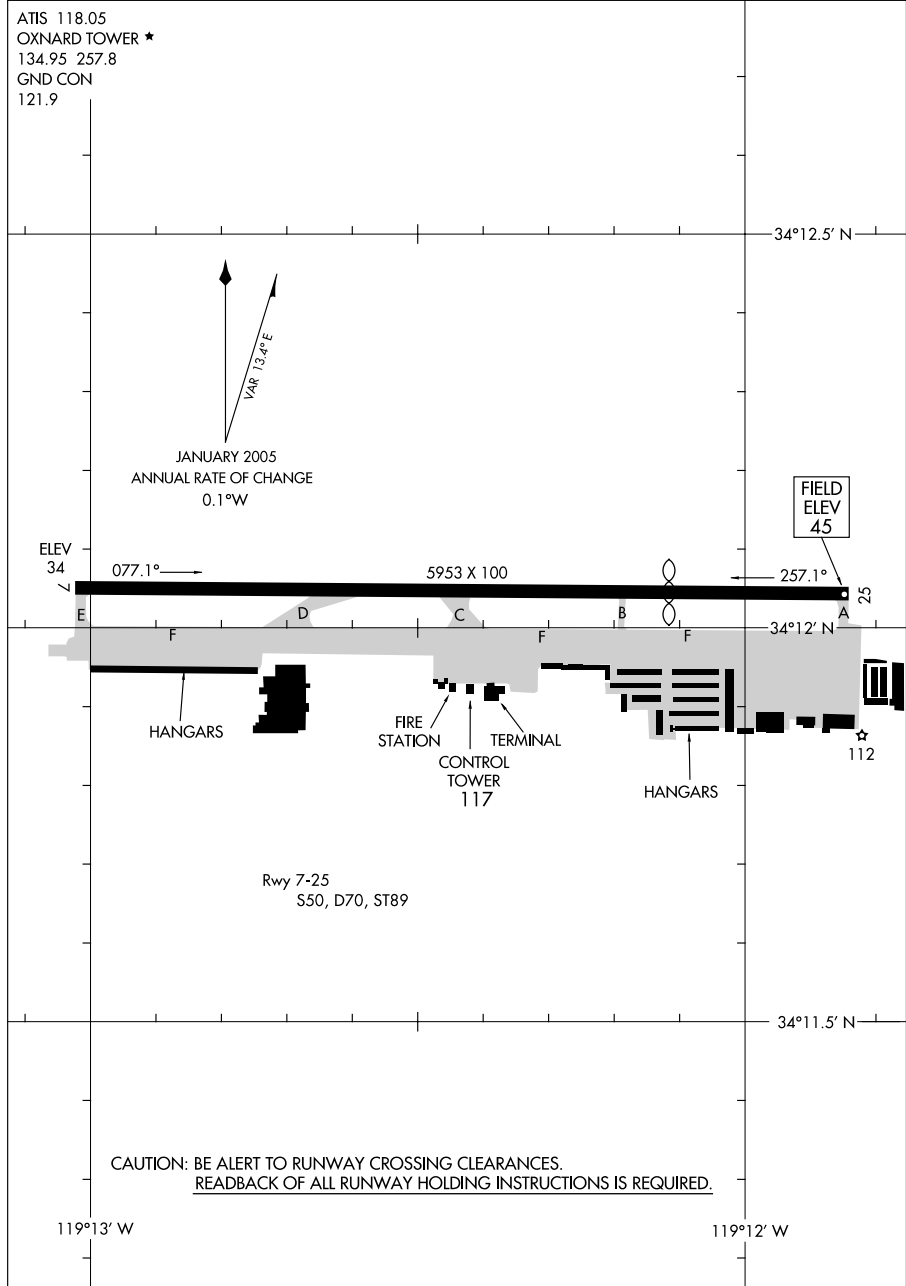

AIRPORT DIAGRAM

08325

OXNARD, CALIFORNIA
OXNARD (OXR)


09295

AIRPORT DIAGRAM

PALMDALE RGNL/USAF PLANT 42 (PMD)

PALMDALE, CALIFORNIA

AL-310 (FAA)

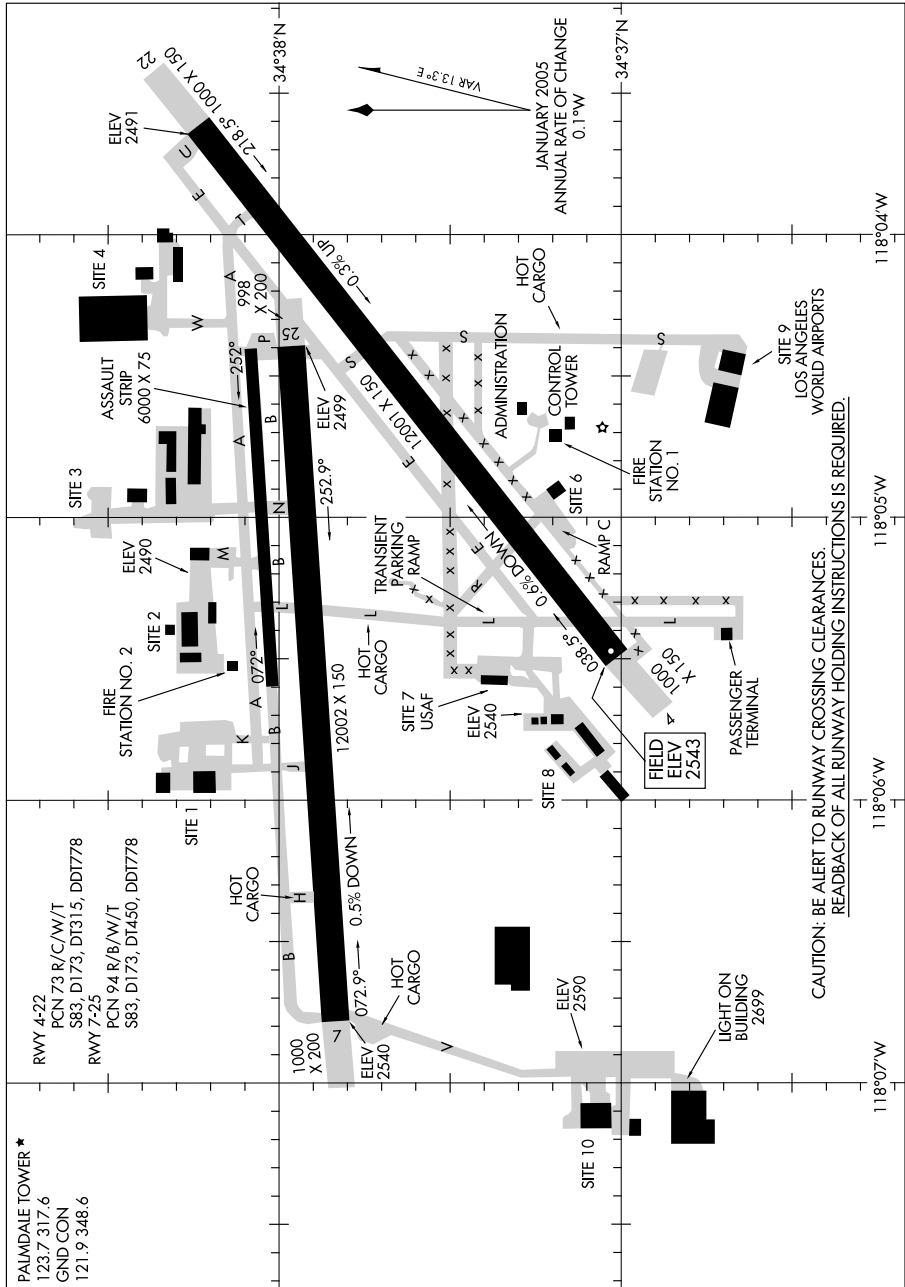


AIRPORT DIAGRAM

09295

PALMDALE, CALIFORNIA
PALMDALE RGNL/USAF PLANT 42 (PMD)

08213

AIRPORT DIAGRAM

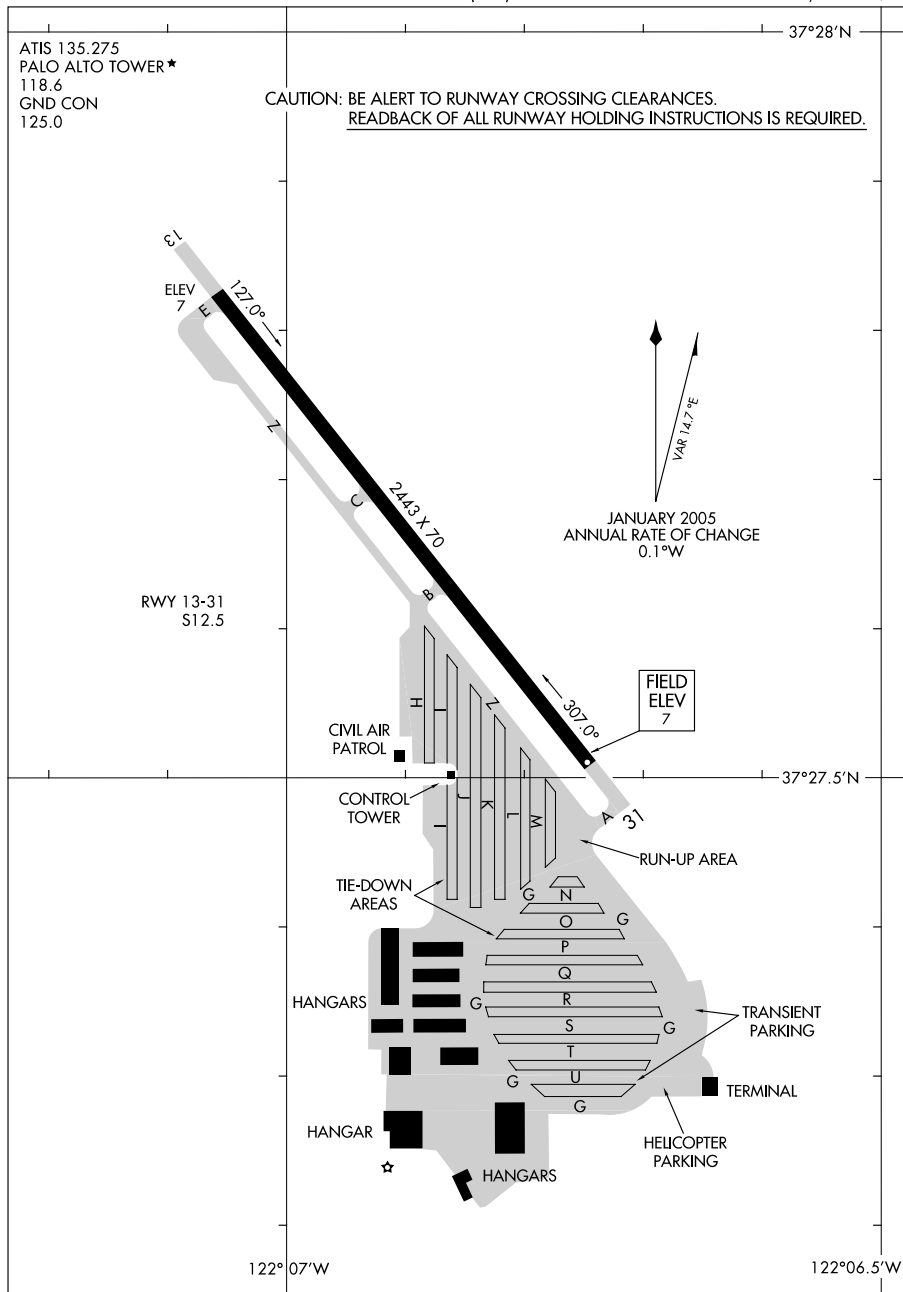PALO ALTO AIRPORT OF SANTA CLARA COUNTY (P.A.O)
AL-9216 (FAA) PALO ALTO, CALIFORNIA

AIRPORT DIAGRAM

08213


PALO ALTO, CALIFORNIA
PALO ALTO AIRPORT OF SANTA CLARA COUNTY (P.A.O)

09071

AIRPORT DIAGRAM

AL-6646 (FAA)

PHOENIX DEER VALLEY (DVT)
PHOENIX, ARIZONA

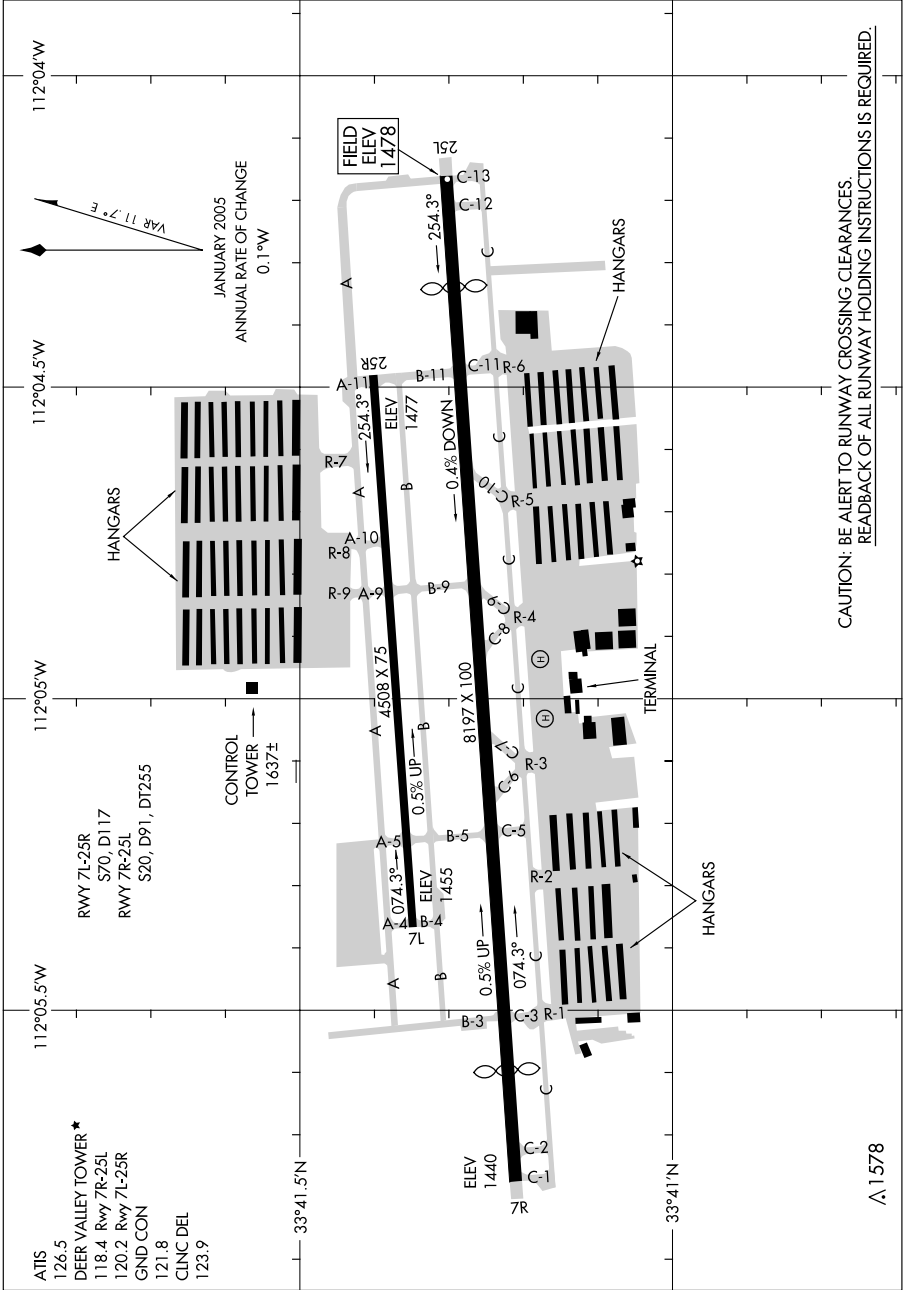


AIRPORT DIAGRAM

09071

PHOENIX, ARIZONA
PHOENIX DEER VALLEY (DVT)

09127

AIRPORT DIAGRAM

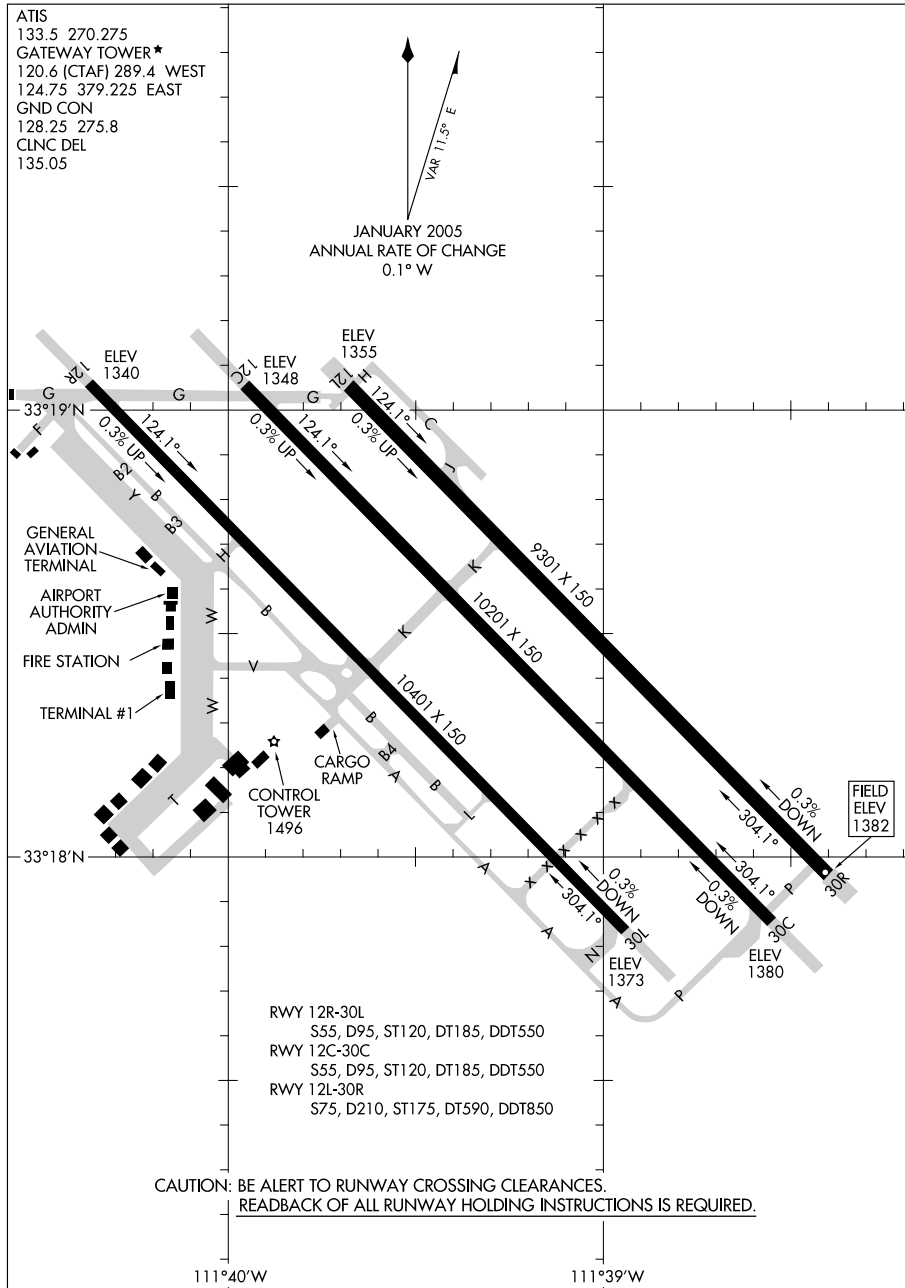PHOENIX-MESA GATEWAY (IWA)
PHOENIX, ARIZONA

AIRPORT DIAGRAM

09127

PHOENIX, ARIZONA
PHOENIX-MESA GATEWAY (IWA)


07354

AIRPORT DIAGRAM

POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)

AFD-925 [USN]

OXNARD, CALIFORNIA

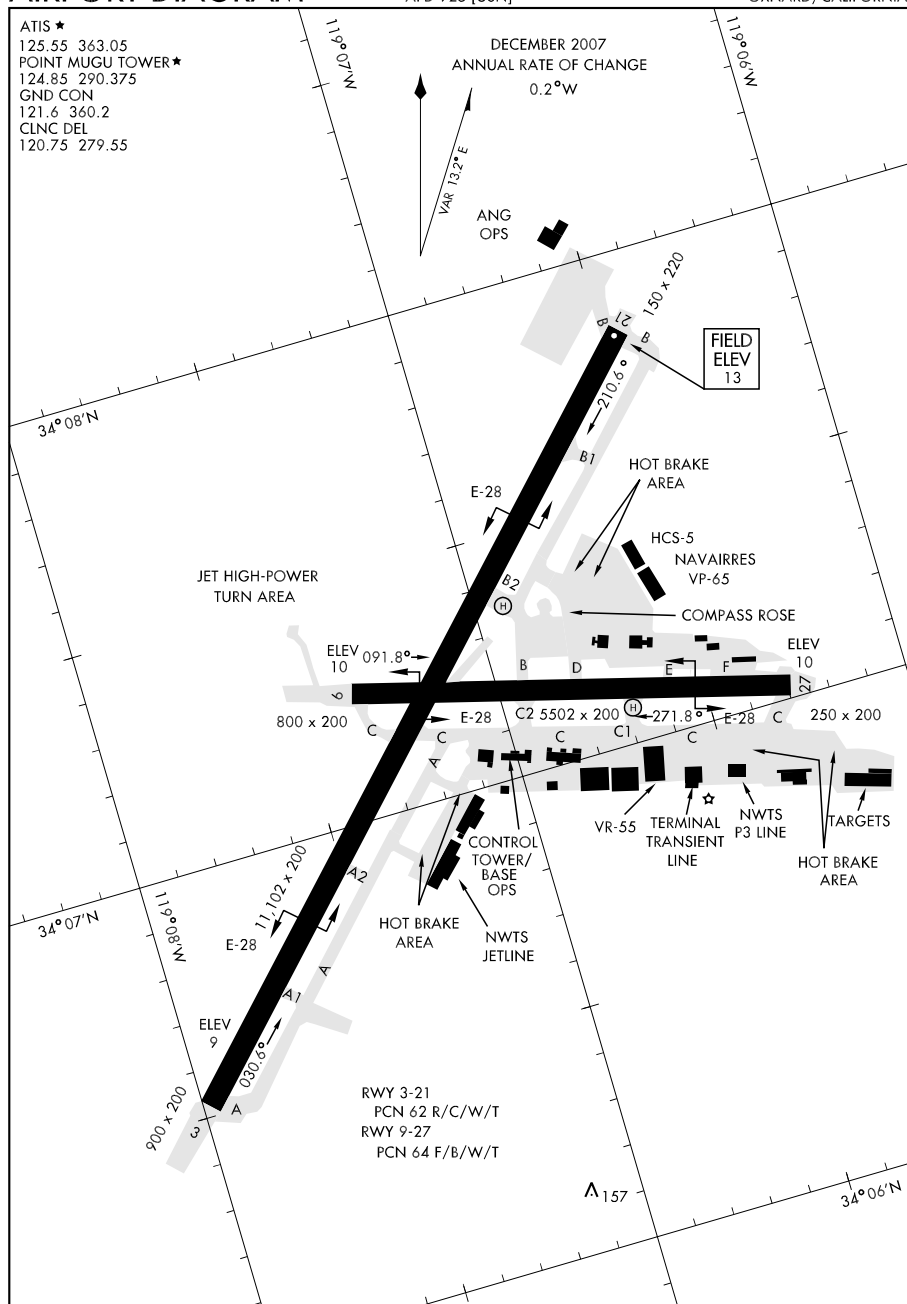

AIRPORT DIAGRAM

OXNARD, CALIFORNIA

POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)


09239

AIRPORT DIAGRAM

AL-546 (FAA)

PRESCOTT/ERNEST A. LOVE FIELD (PRC)

PRESCOTT, ARIZONA

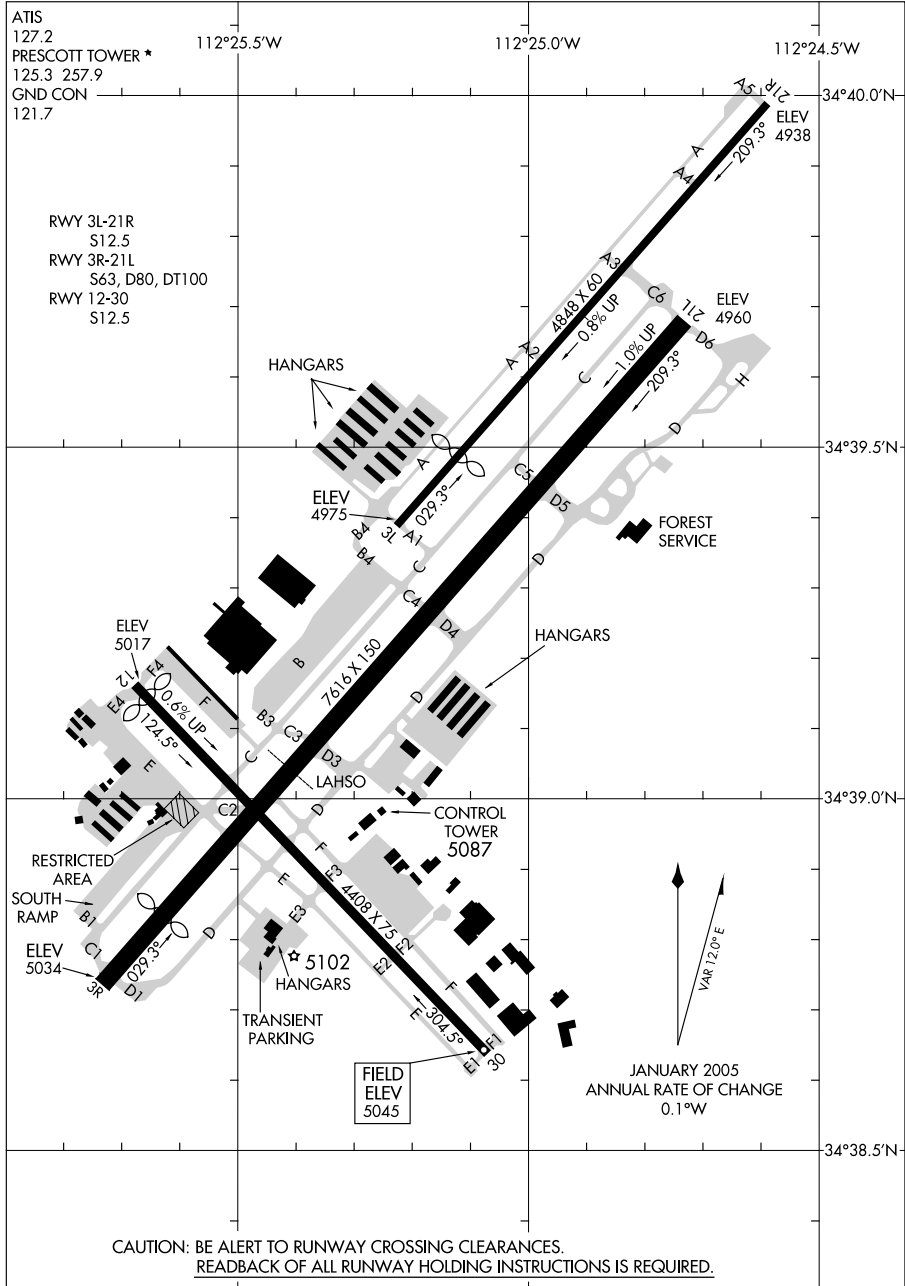

AIRPORT DIAGRAM


09239

PRESCOTT, ARIZONA
PRESCOTT/ERNEST A. LOVE FIELD (PRC)

09295

AIRPORT DIAGRAM

AL-683 (FAA)

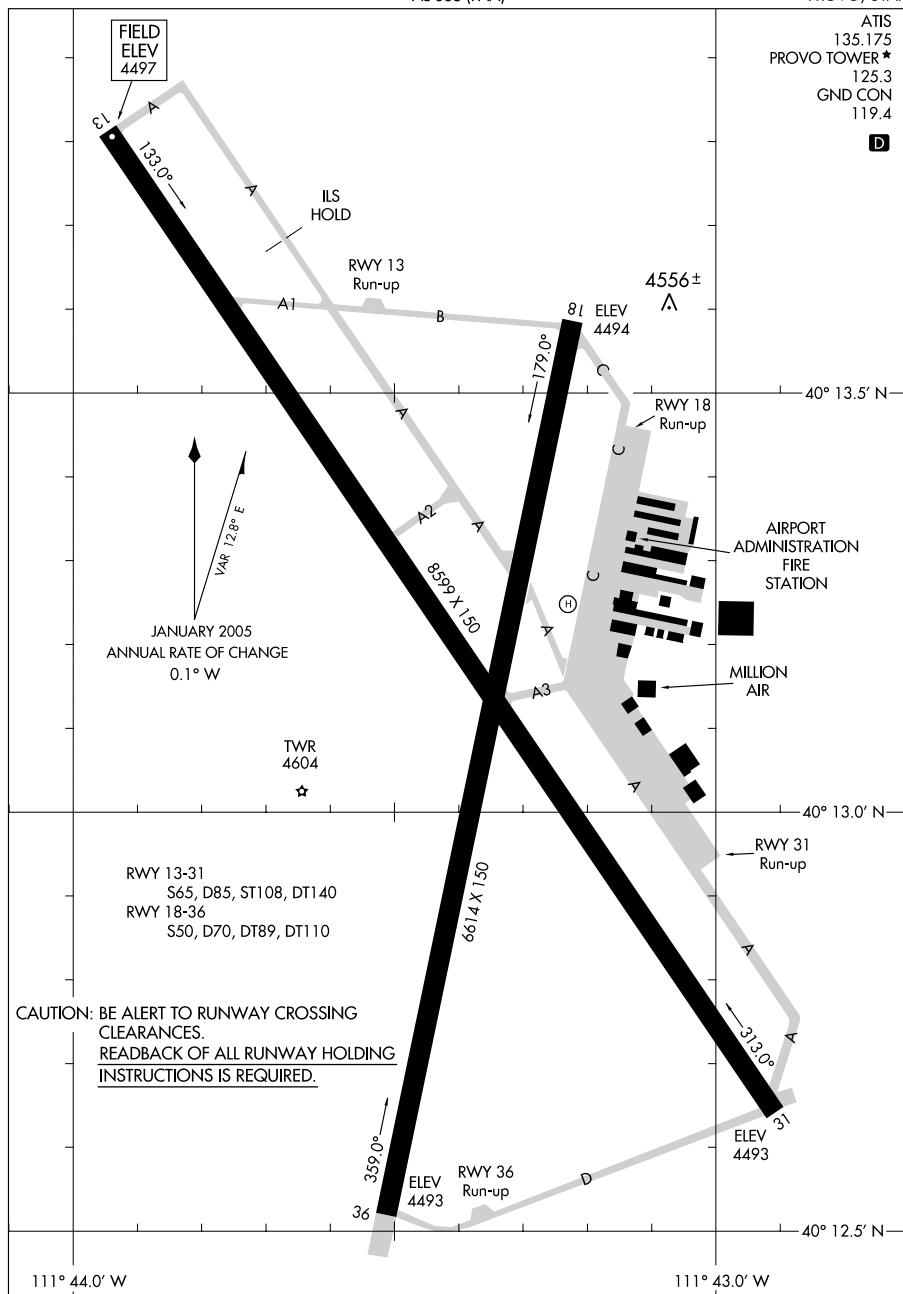PROVO MUNI (PVT)
PROVO, UTAH

AIRPORT DIAGRAM

09295


PROVO, UTAH
PROVO MUNI (PVT)

09351

AIRPORT DIAGRAM

AL-334 (FAA)

PUEBLO MEMORIAL (PUB)
PUEBLO, COLORADO

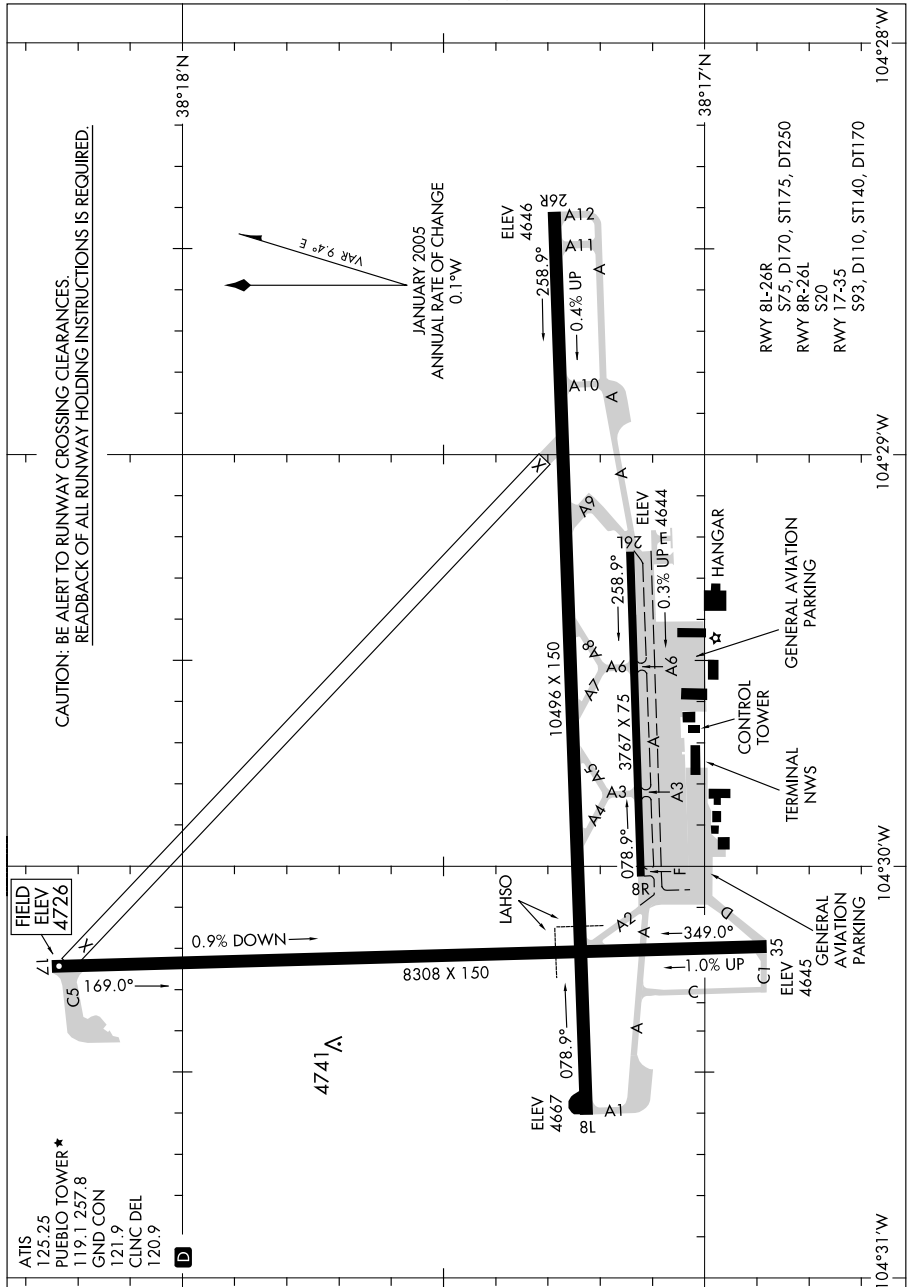

AIRPORT DIAGRAM

09351


PUEBLO, COLORADO
PUEBLO MEMORIAL (PUB)

09239

AIRPORT DIAGRAM

AL-6667 (FAA)

RAMONA (RNM)
RAMONA, CALIFORNIA

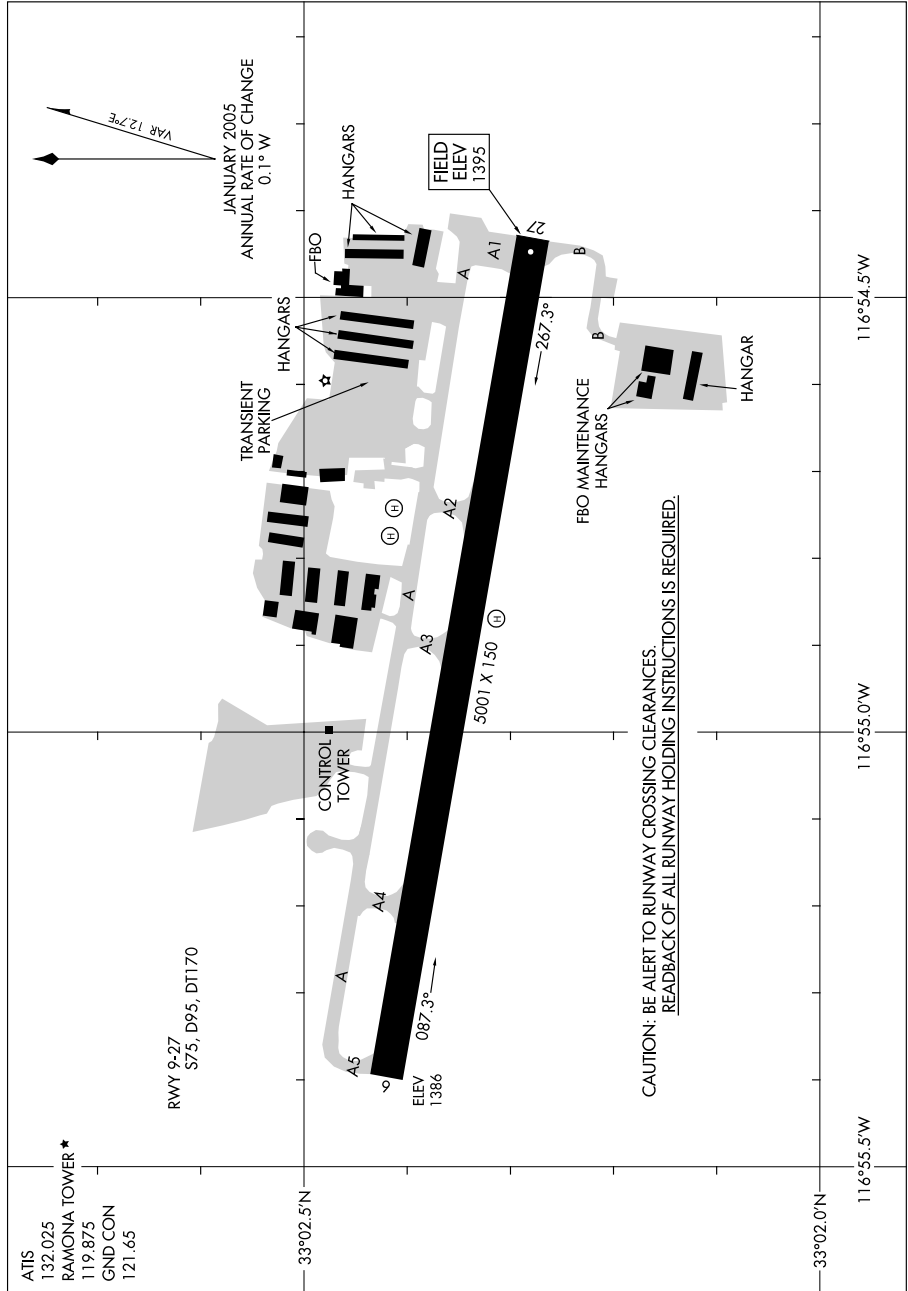

AIRPORT DIAGRAM

09239


RAMONA, CALIFORNIA
RAMONA (RNM)

08325

AIRPORT DIAGRAM

AL-688 (FAA)

REDDING MUNI (RDD)
REDDING, CALIFORNIA

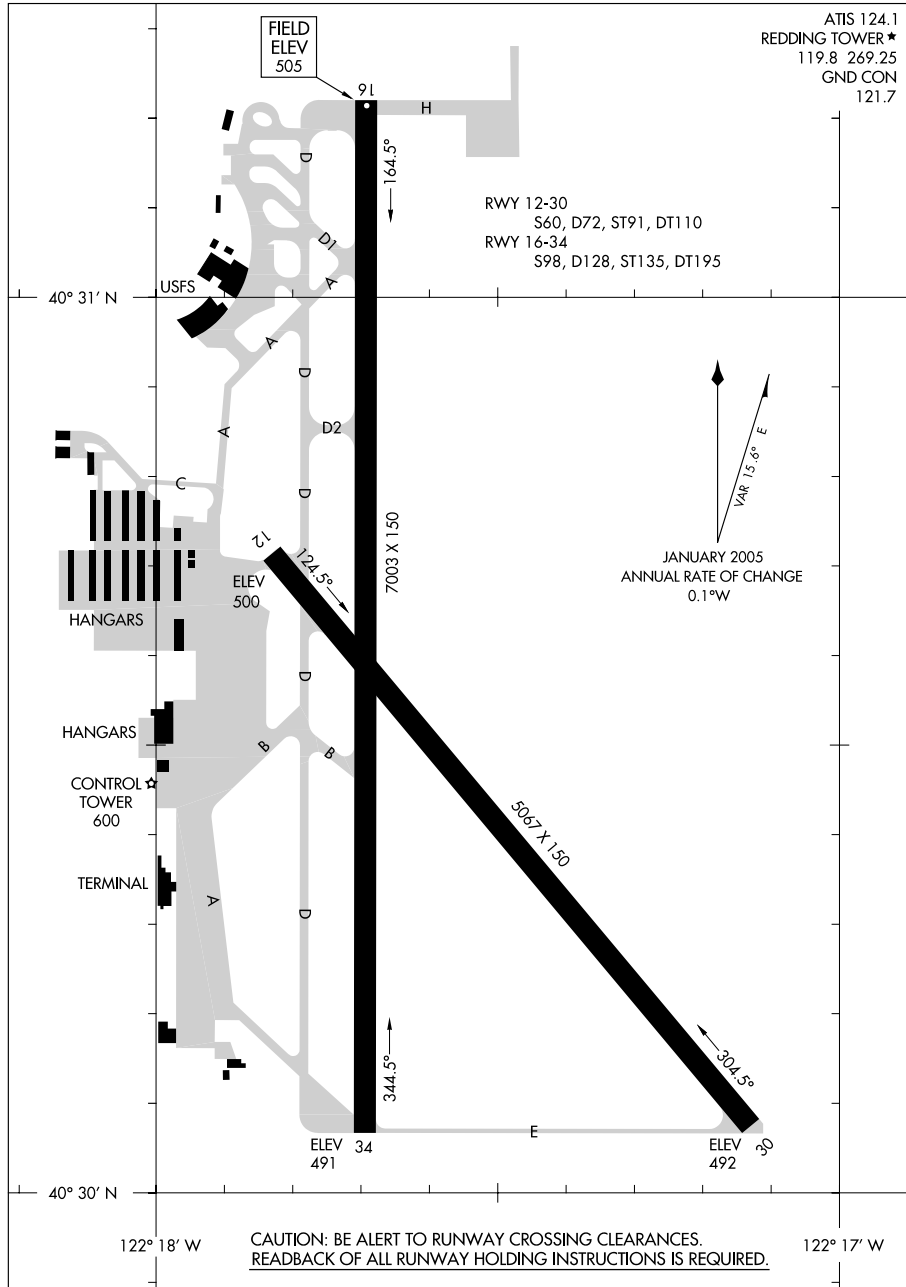


AIRPORT DIAGRAM

08325

REDDING, CALIFORNIA
REDDING MUNI (RDD)

09295

AIRPORT DIAGRAM

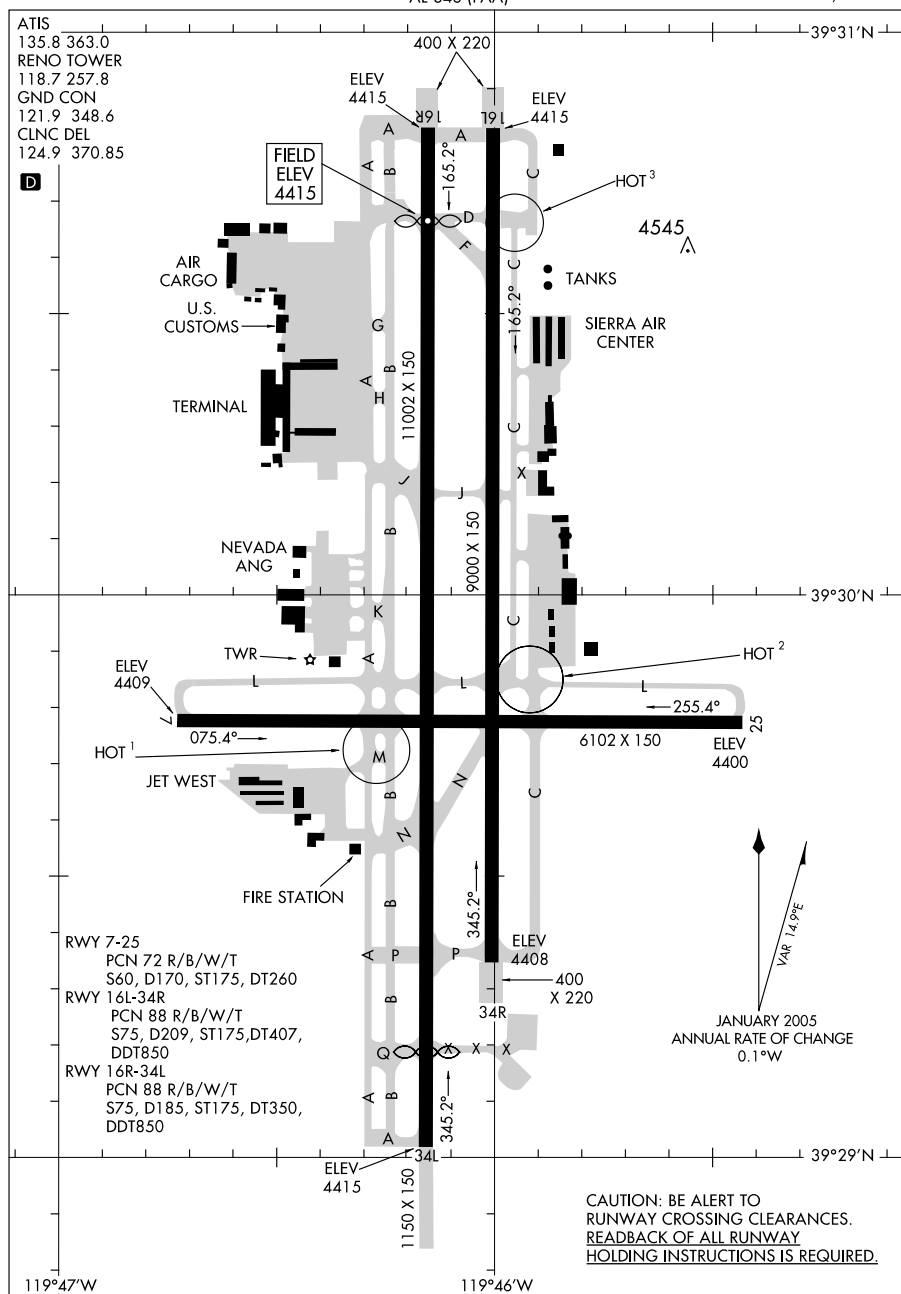RENO/TAHOE INTL (RNO)
RENO, NEVADA

AIRPORT DIAGRAM


09295

RENO, NEVADA
RENO/TAHOE INTL (RNO)

07354

AIRPORT DIAGRAM


RIVERSIDE MUNI (RAL)
RIVERSIDE, CALIFORNIA

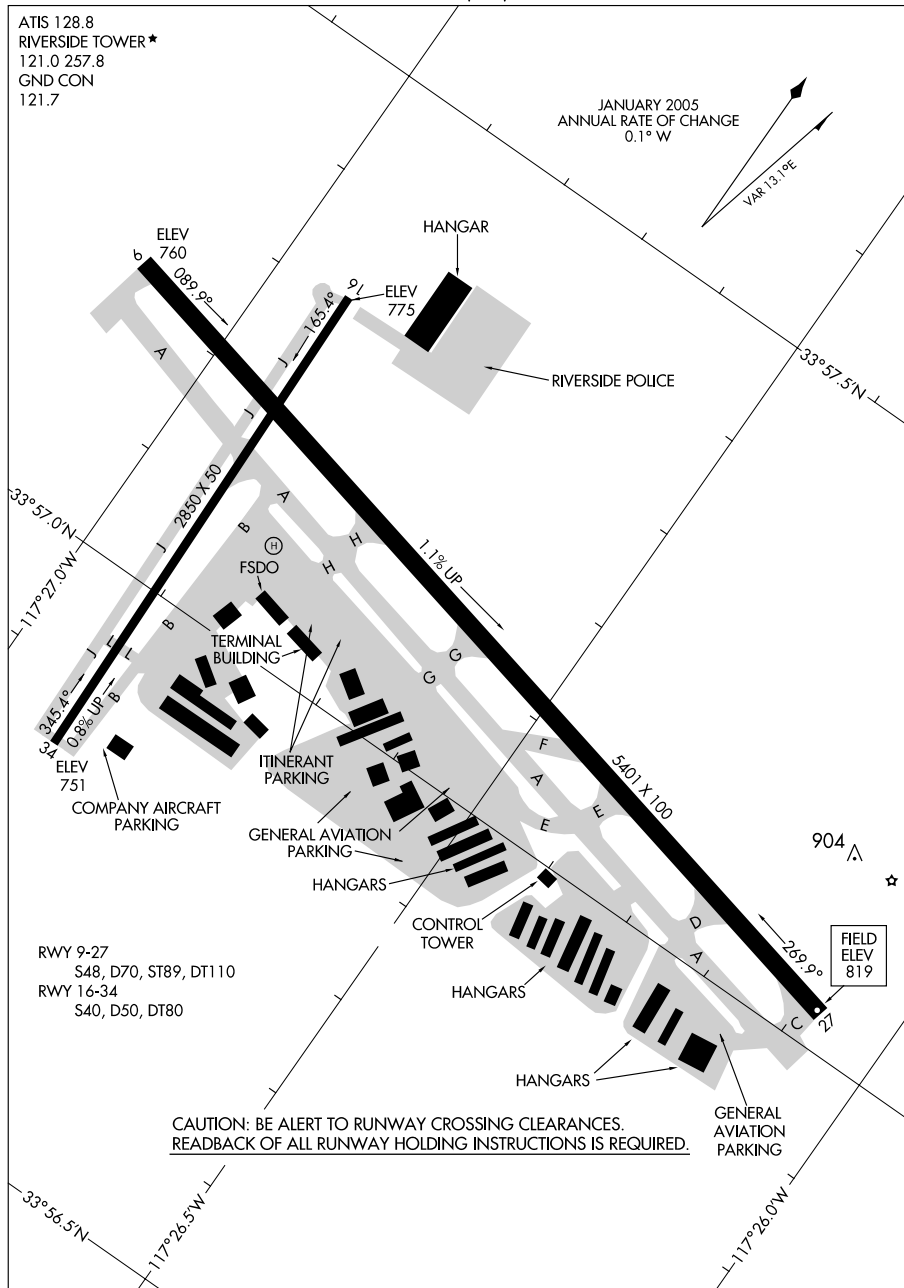

AIRPORT DIAGRAM

07354


RIVERSIDE, CALIFORNIA
RIVERSIDE MUNI (RAL)

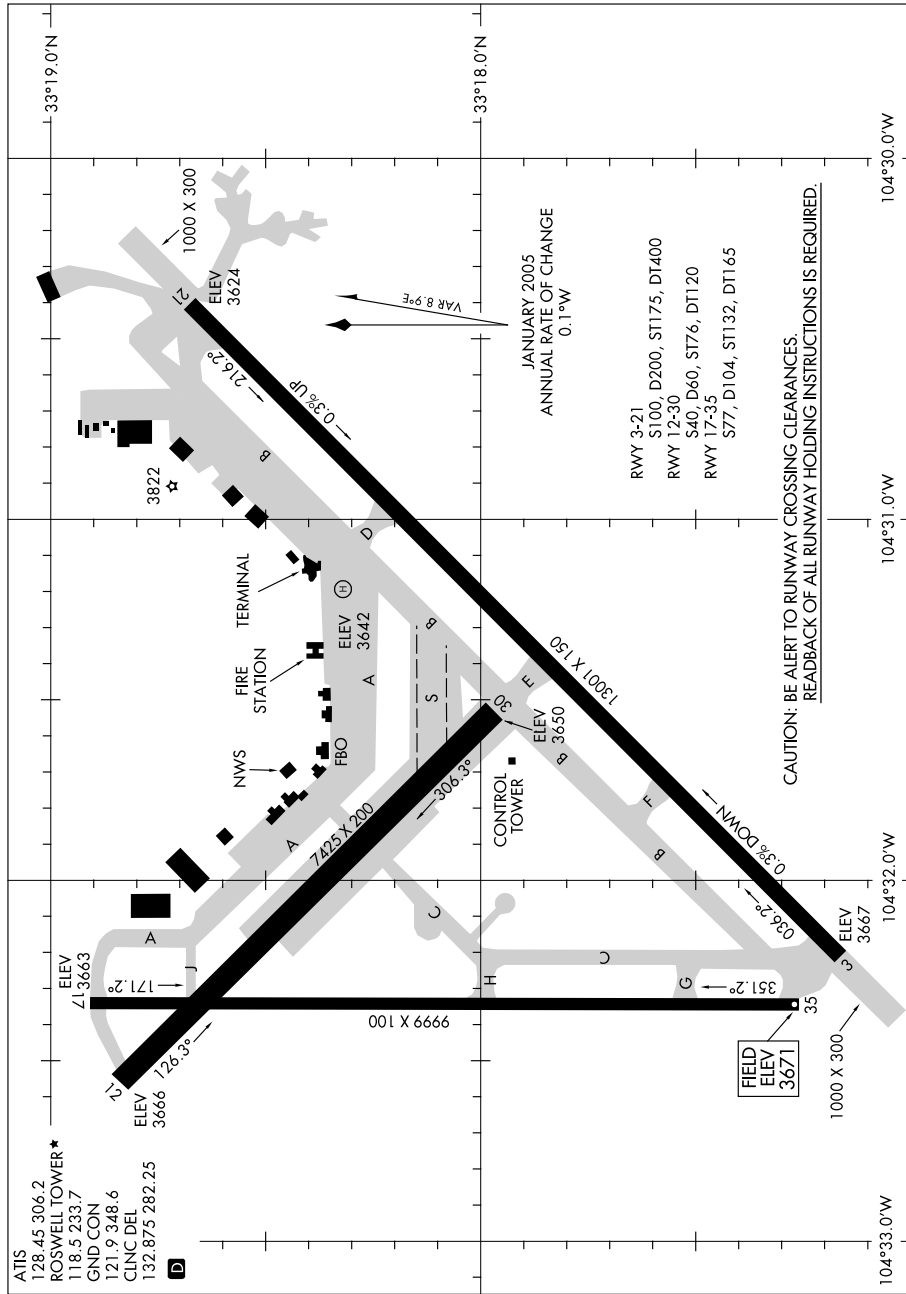

09239

AIRPORT DIAGRAM

SACRAMENTO/ MC CLELLAN AIRFIELD (MCC)
SACRAMENTO, CALIFORNIA

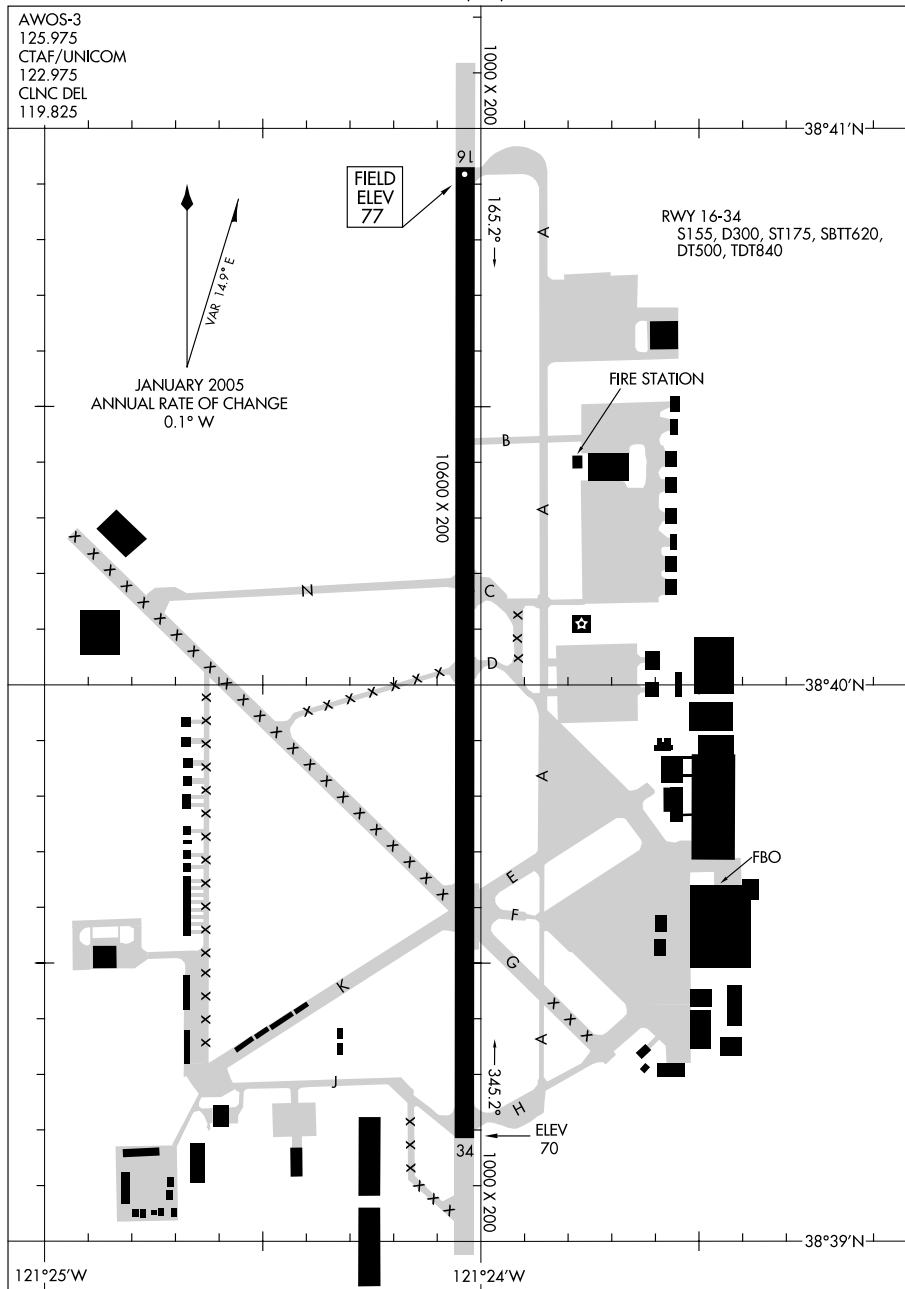

AIRPORT DIAGRAM


09239

SACRAMENTO, CALIFORNIA
SACRAMENTO/MC CLELLAN AIRFIELD (MCC)

09351

AIRPORT DIAGRAM

AL-5490 (FAA)

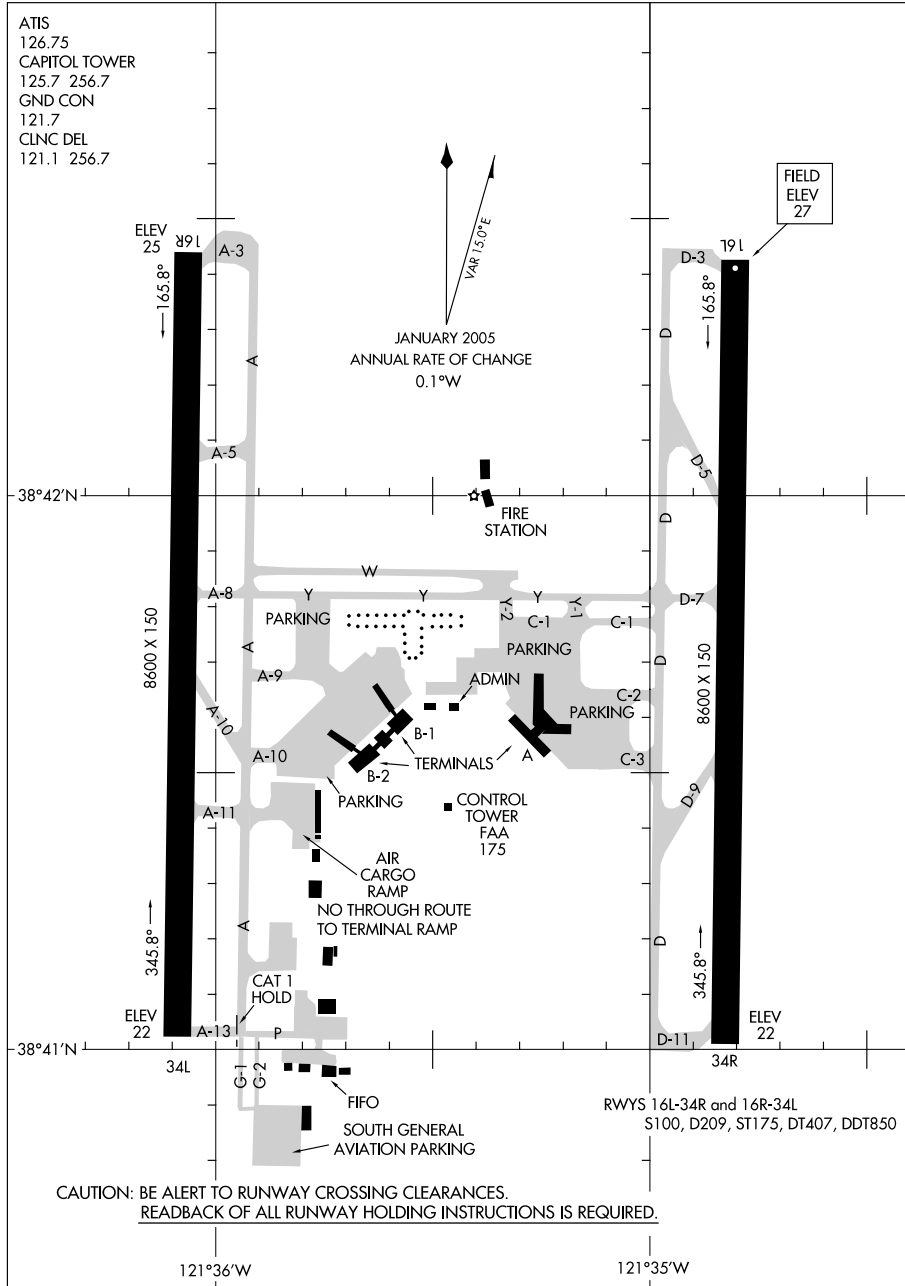SACRAMENTO INTL (SMF)
SACRAMENTO, CALIFORNIA

AIRPORT DIAGRAM


09351

SACRAMENTO, CALIFORNIA
SACRAMENTO INTL (SMF)

08213

AIRPORT DIAGRAM

AL-356 (FAA)

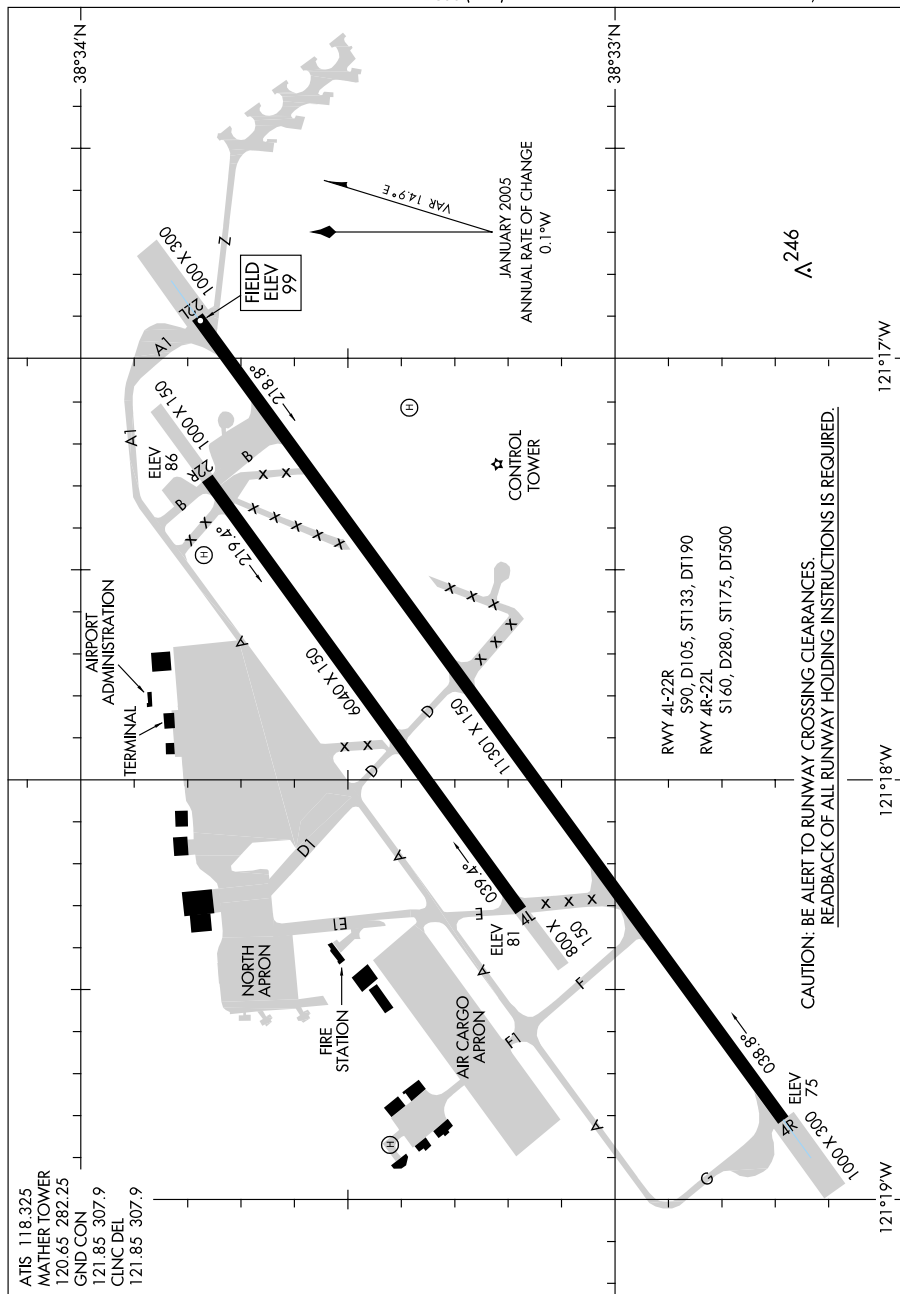SACRAMENTO MATHER (MHR)
SACRAMENTO, CALIFORNIA

AIRPORT DIAGRAM


08213

SACRAMENTO, CALIFORNIA
SACRAMENTO MATHER (MHR)

09295

AIRPORT DIAGRAM

AL-363 (FAA)

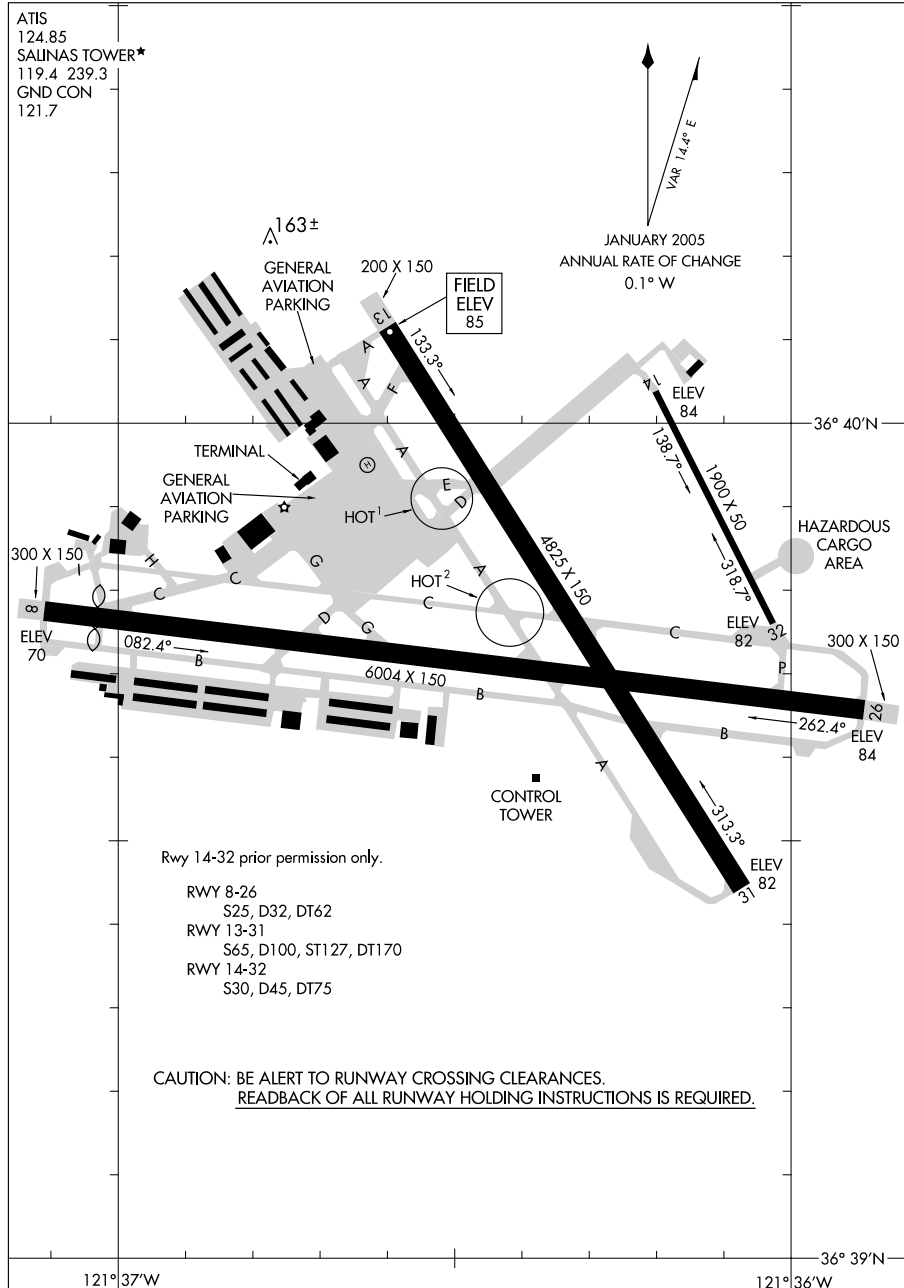SALINAS MUNI (SNS)
SALINAS, CALIFORNIA

AIRPORT DIAGRAM

09295

SALINAS, CALIFORNIA
SALINAS MUNI (SNS)


09351

AIRPORT DIAGRAM

AL-365 (FAA)

SALT LAKE CITY INTL (SLC)

SALT LAKE CITY, UTAH

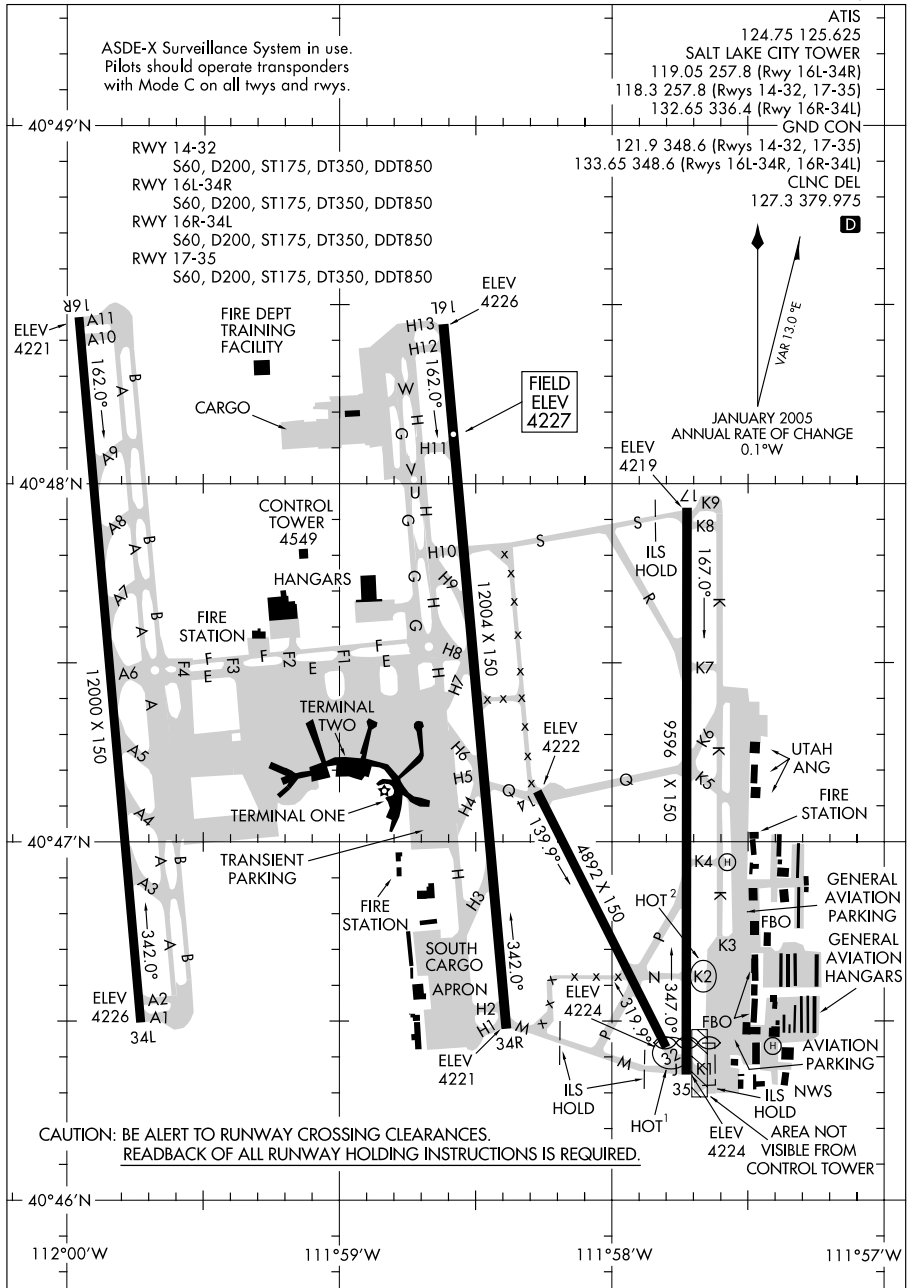

AIRPORT DIAGRAM

09351

SALT LAKE CITY, UTAH


SALT LAKE CITY INTL (SLC)

09071

AIRPORT DIAGRAM

AL-547 (FAA)

SAN BERNARDINO INTL (SBD)
SAN BERNARDINO, CALIFORNIA

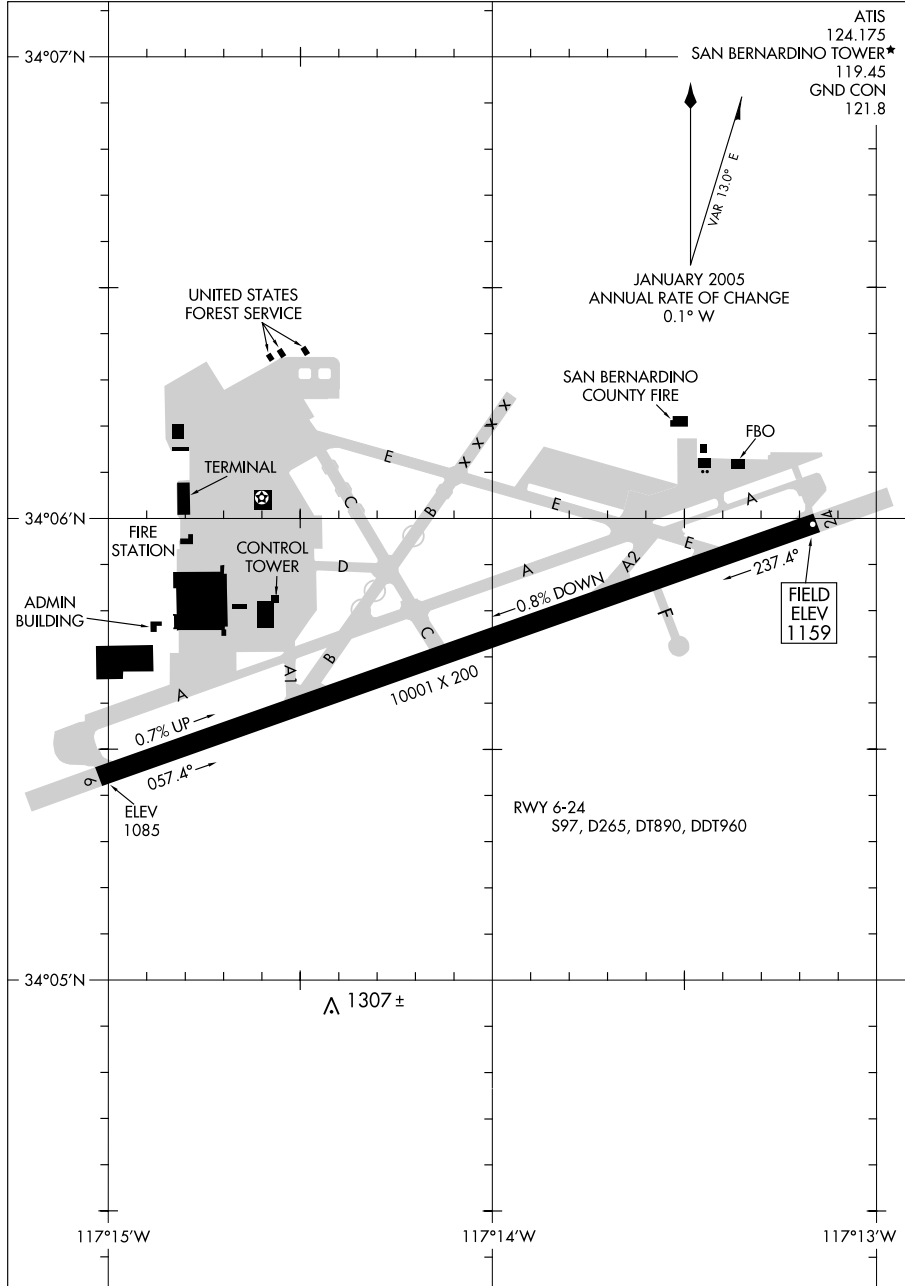

AIRPORT DIAGRAM


09071

SAN BERNARDINO, CALIFORNIA
SAN BERNARDINO INTL (SBD)

08157

AIRPORT DIAGRAM

AL-9219 (FAA)

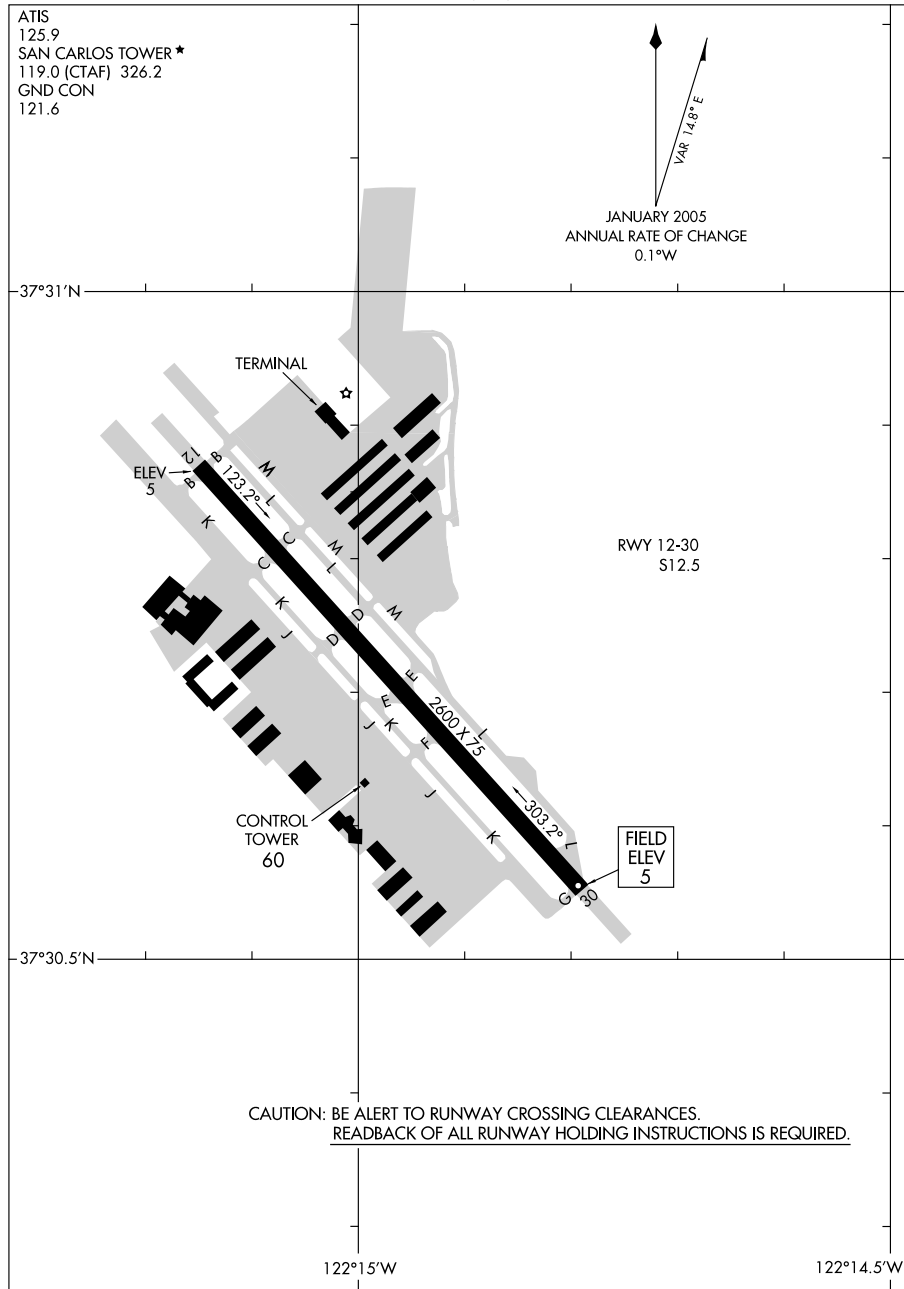SAN CARLOS (SQL)
SAN CARLOS, CALIFORNIA

AIRPORT DIAGRAM

08157

SAN CARLOS, CALIFORNIA
SAN CARLOS (SQL)

05300


AIRPORT DIAGRAM

SAN CLEMENTE ISLAND NALF (FREDERICK SHERMAN FLD) (NUC)

AFD-5126 [USN]

SAN CLEMENTE ISLAND, CALIFORNIA

ATIS ★ 268.8
SAN CLEMENTE ISLAND TOWER ★
126.75 278.8
GND CON
119.55 352.4

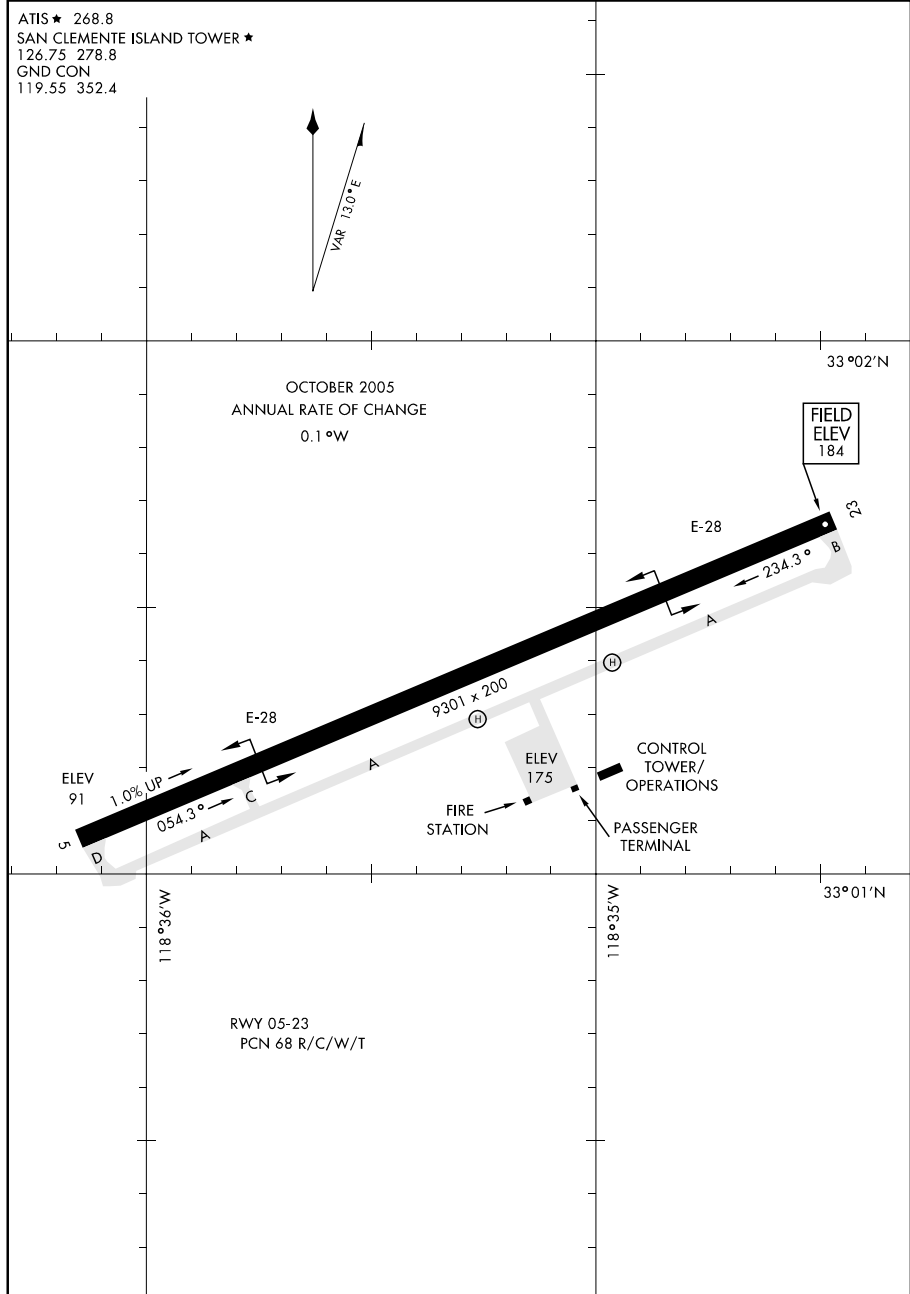

AIRPORT DIAGRAM

SAN CLEMENTE ISLAND, CALIFORNIA


SAN CLEMENTE ISLAND NALF (FREDERICK SHERMAN FLD) (NUC)

09071

AIRPORT DIAGRAM

SAN DIEGO/MONTGOMERY FIELD (MYF)
SAN DIEGO, CALIFORNIA

AL-5401 (FAA)

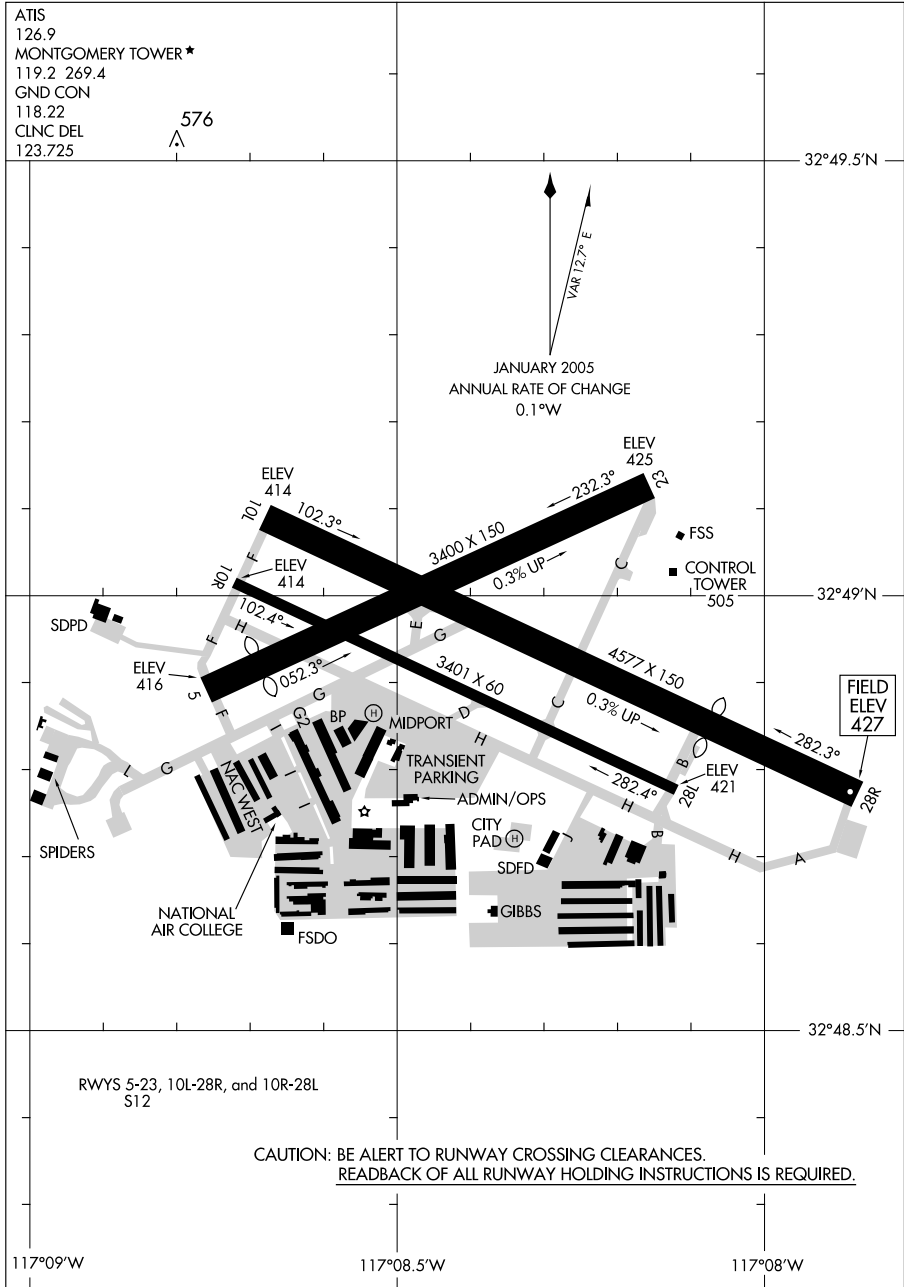

AIRPORT DIAGRAM

09071


SAN DIEGO, CALIFORNIA
SAN DIEGO/MONTGOMERY FIELD (MYF)

09071

AIRPORT DIAGRAM

AL-5402 (FAA)

SAN DIEGO/GILLESPIE FIELD (SEE)
SAN DIEGO (EL CAJON), CALIFORNIA

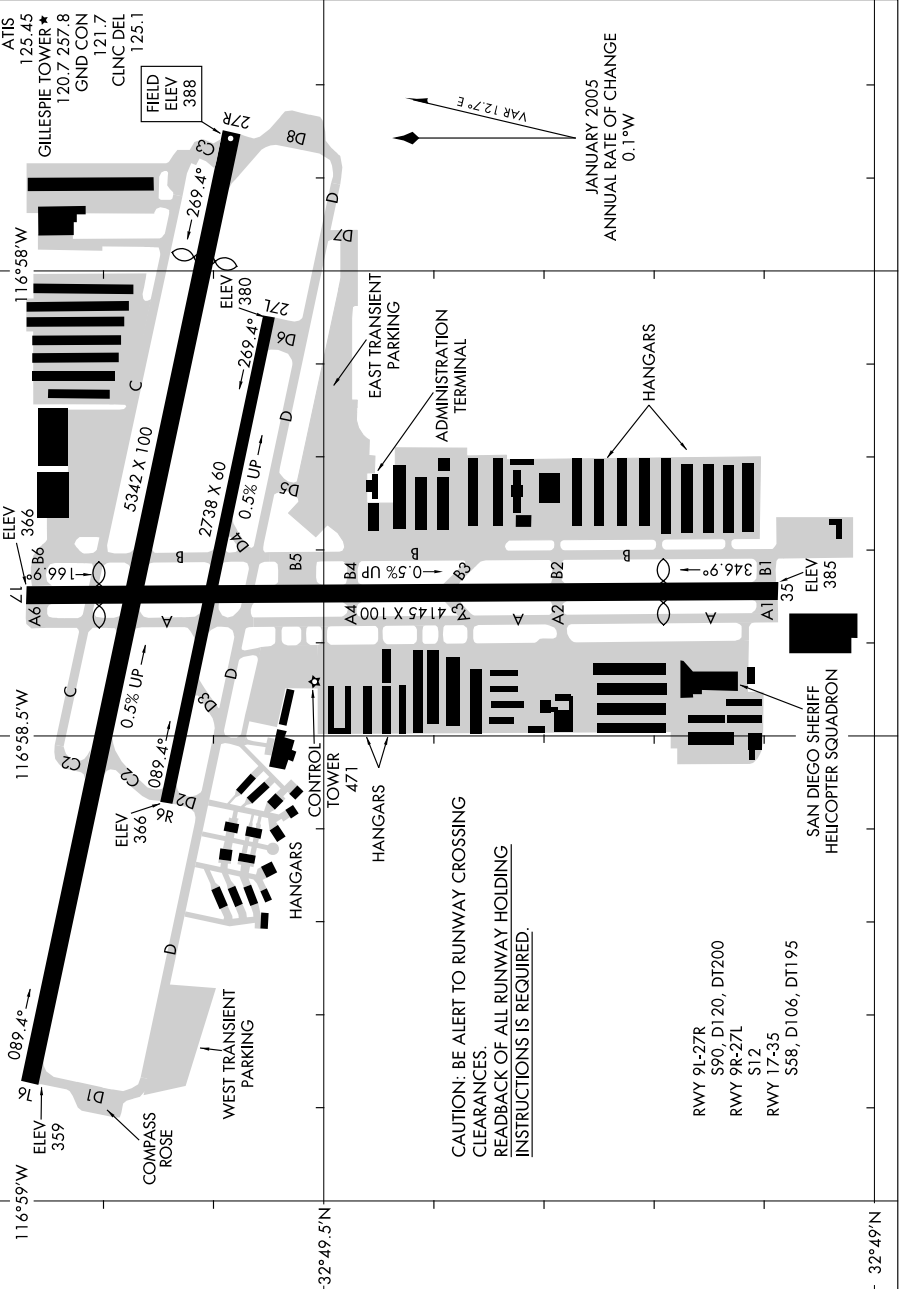

AIRPORT DIAGRAM


09071

SAN DIEGO (EL CAJON), CALIFORNIA
SAN DIEGO/GILLESPIE FIELD (SEE)

09295

AIRPORT DIAGRAM

SAN JOSE/NORMAN Y. MINETA SAN JOSE INTL (SJC)
AL-693 (FAA) SAN JOSE, CALIFORNIA

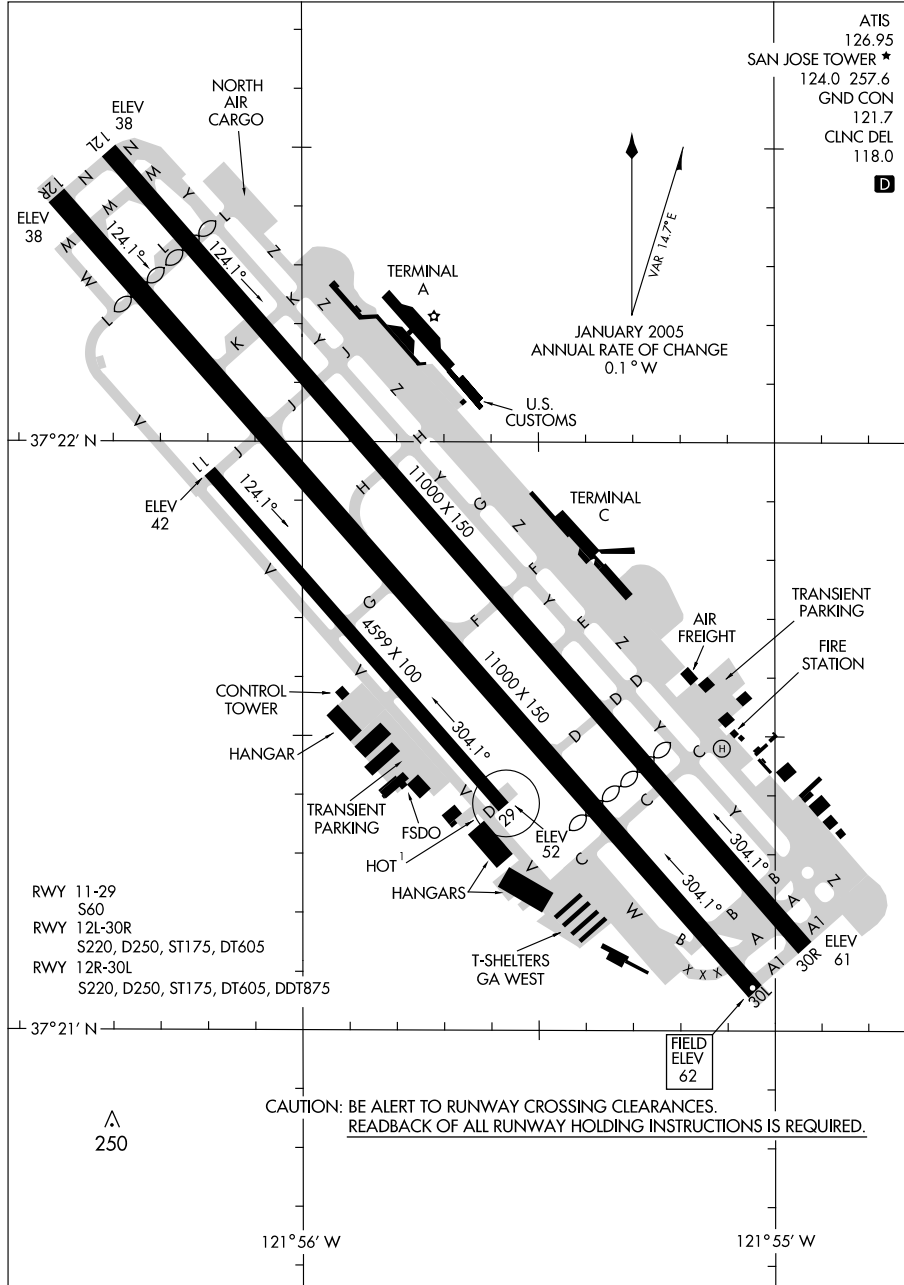

AIRPORT DIAGRAM


09295

SAN JOSE, CALIFORNIA
SAN JOSE/NORMAN Y. MINETA SAN JOSE INTL (SJC)

09071

AIRPORT DIAGRAM

SAN JOSE/REID-HILLVIEW OF SANTA CLARA COUNTY (R.H.V)
AL-5591 (FAA)
SAN JOSE, CALIFORNIA

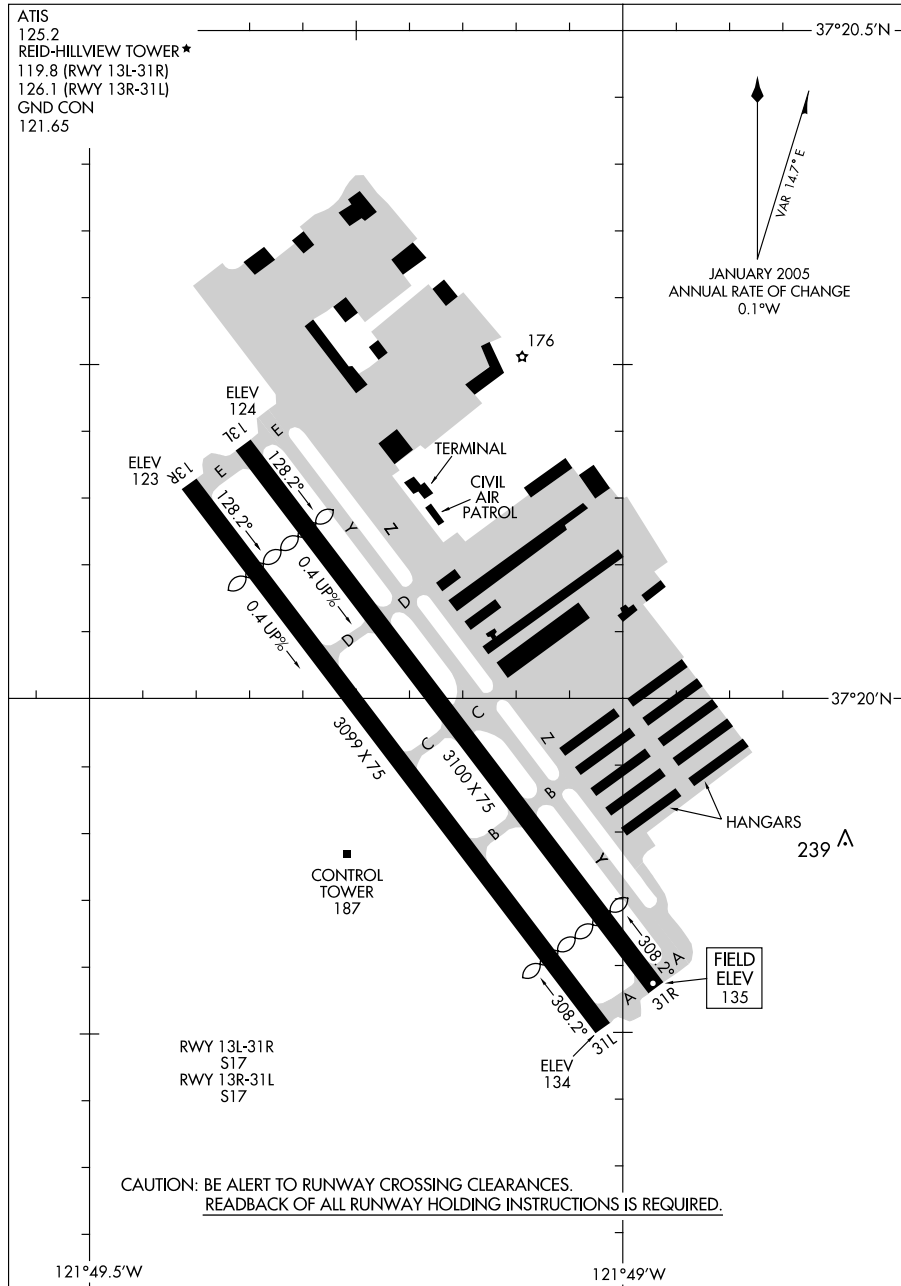

AIRPORT DIAGRAM

09071


SAN JOSE, CALIFORNIA
SAN JOSE/REID-HILLVIEW OF SANTA CLARA COUNTY (R.H.V)

09071

AIRPORT DIAGRAM

AL-989 (FAA)

SAN LUIS COUNTY RGNL (SBP)
SAN LUIS OBISPO, CALIFORNIA

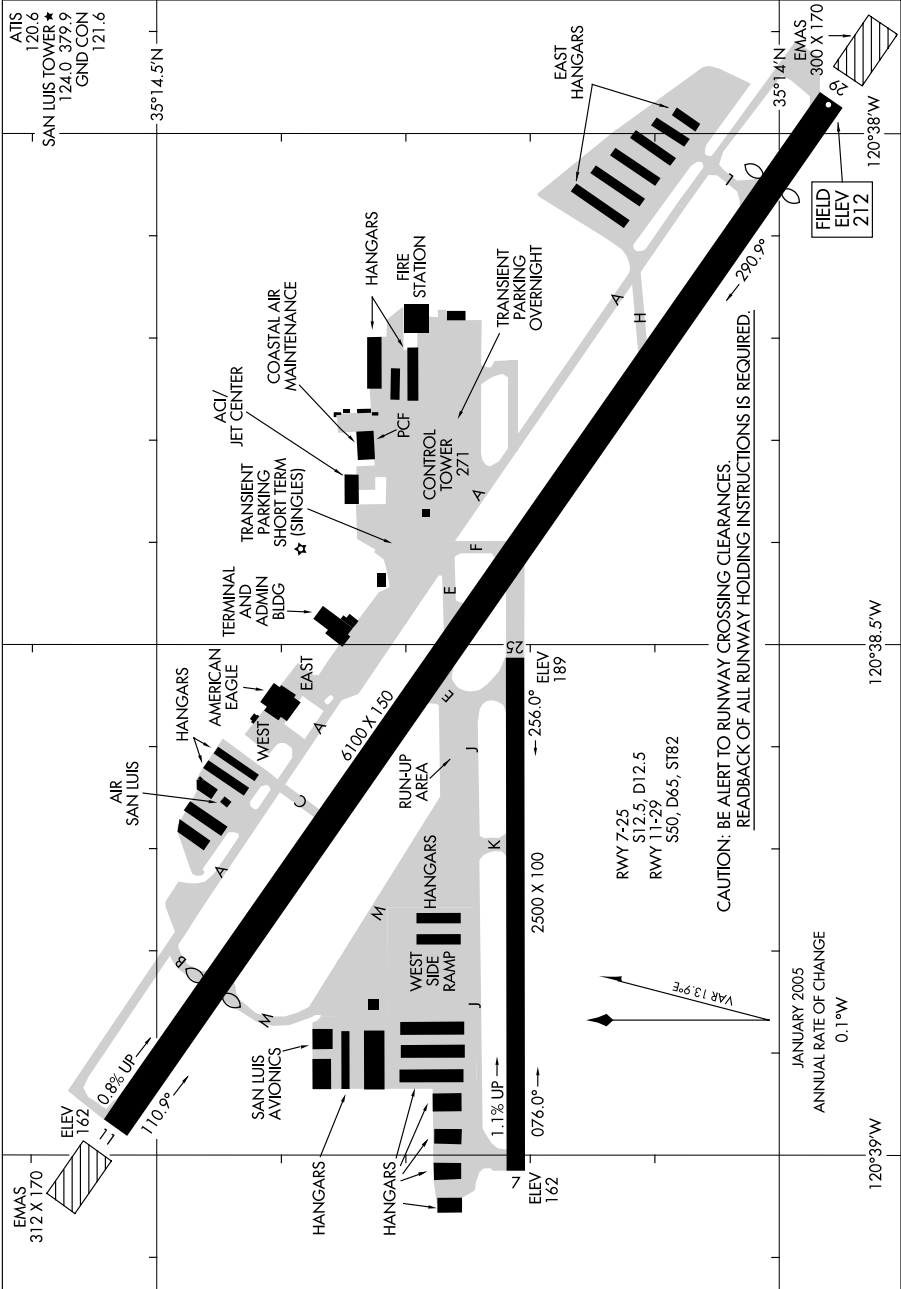

AIRPORT DIAGRAM

SAN LUIS OBISPO, CALIFORNIA
SAN LUIS COUNTY RGNL (SBP)

09071

09239


AIRPORT DIAGRAM

AFD-5162 [USN]

SAN NICOLAS ISLAND NOLF (KNSI)

SAN NICOLAS ISLAND, CALIFORNIA

SAN NICOLAS TOWER ★
126.85 379.3

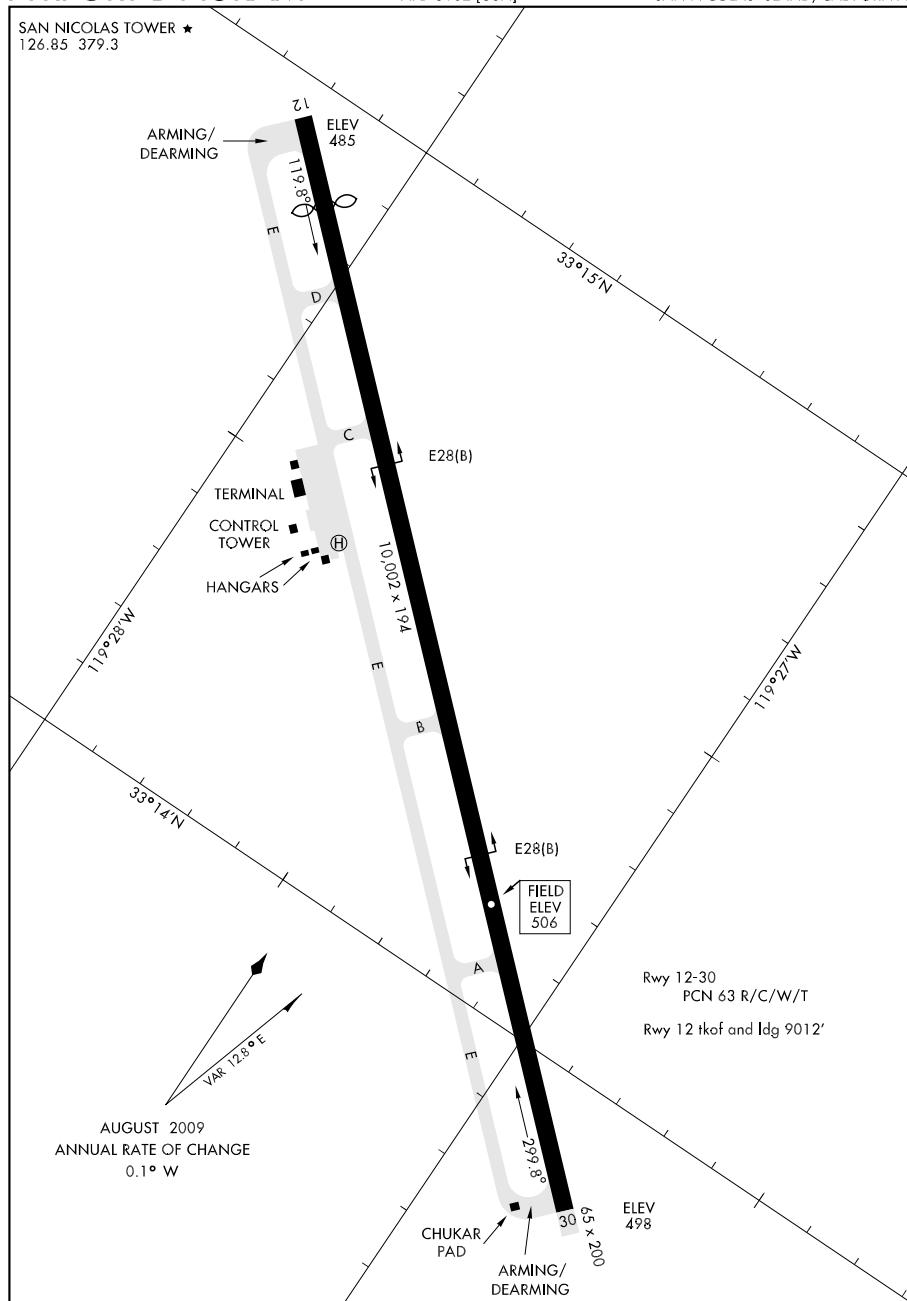


AIRPORT DIAGRAM

SAN NICOLAS ISLAND, CALIFORNIA
SAN NICOLAS ISLAND NOLF (KNSI)

AIRPORT DIAGRAM

SANTA ANA/JOHN WAYNE ARPT-ORANGE COUNTY (SNA)
AL-377 (FAA) SANTA ANA, CALIFORNIA

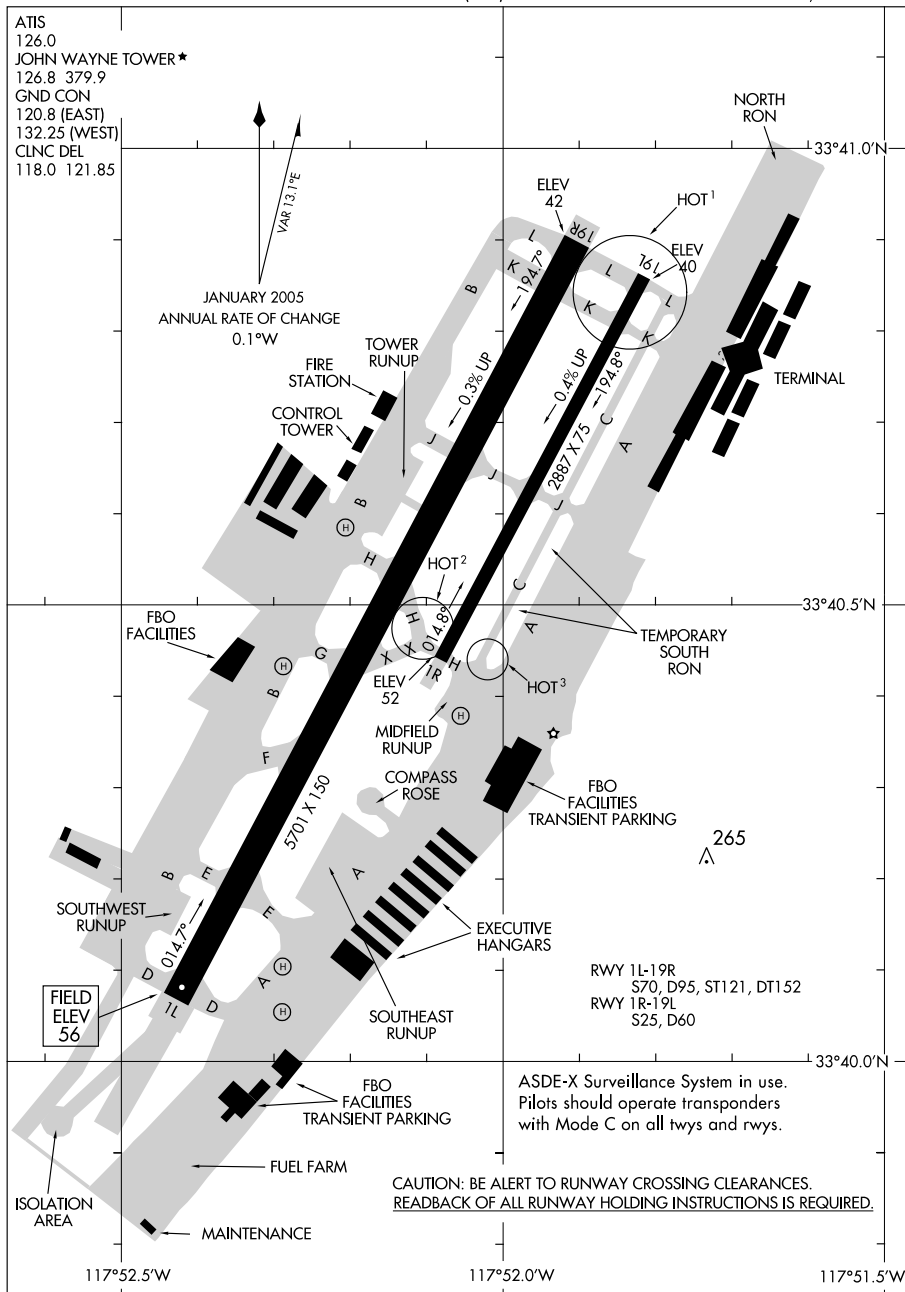

AIRPORT DIAGRAM


SANTA ANA, CALIFORNIA
SANTA ANA/JOHN WAYNE ARPT-ORANGE COUNTY (SNA)

09295

AIRPORT DIAGRAM

AL-378 (FAA)

SANTA BARBARA MUNI (SBA)
SANTA BARBARA, CALIFORNIA

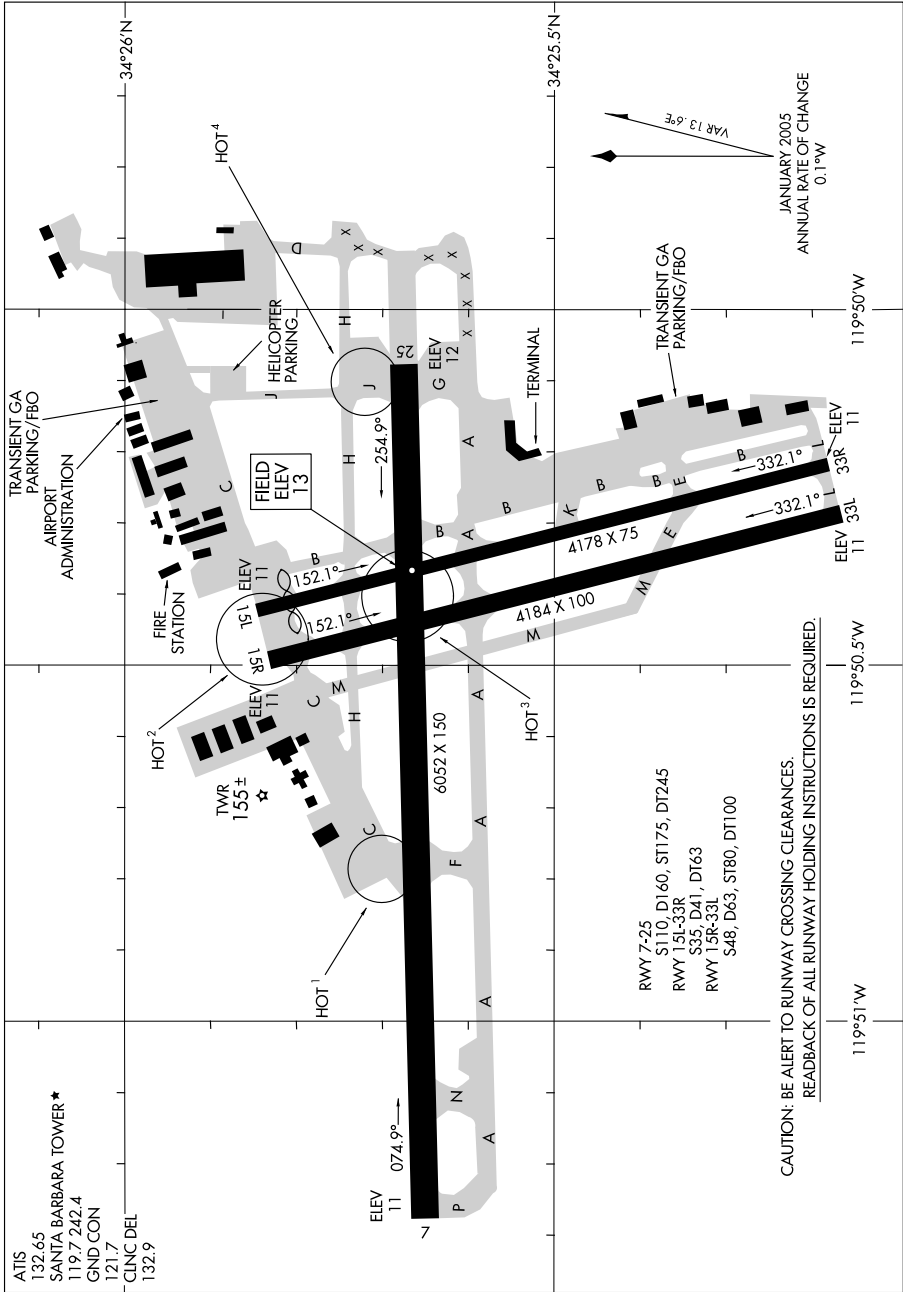

AIRPORT DIAGRAM


09295

SANTA BARBARA, CALIFORNIA
SANTA BARBARA MUNI (SBA)

08101

AIRPORT DIAGRAM

AL-548 (FAA)

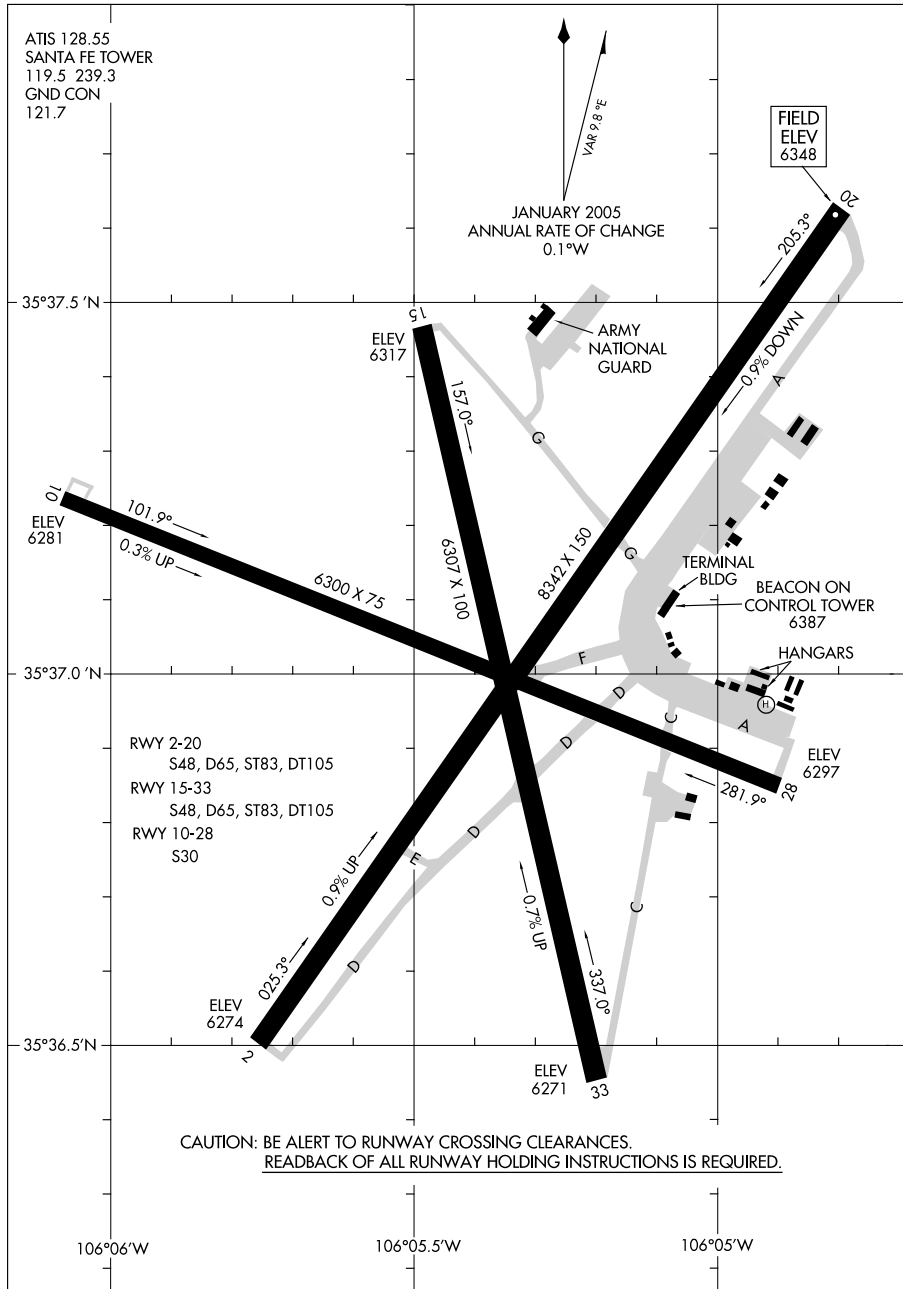SANTA FE MUNI (SAF)
SANTA FE, NEW MEXICO

AIRPORT DIAGRAM

08101

SANTA FE, NEW MEXICO
SANTA FE MUNI (SAF)


07074

AIRPORT DIAGRAM

SANTA MARIA PUBLIC/CAPTAIN G. ALLAN HANCOCK FIELD (SMX)

AL-379 (FAA)

SANTA MARIA, CALIFORNIA

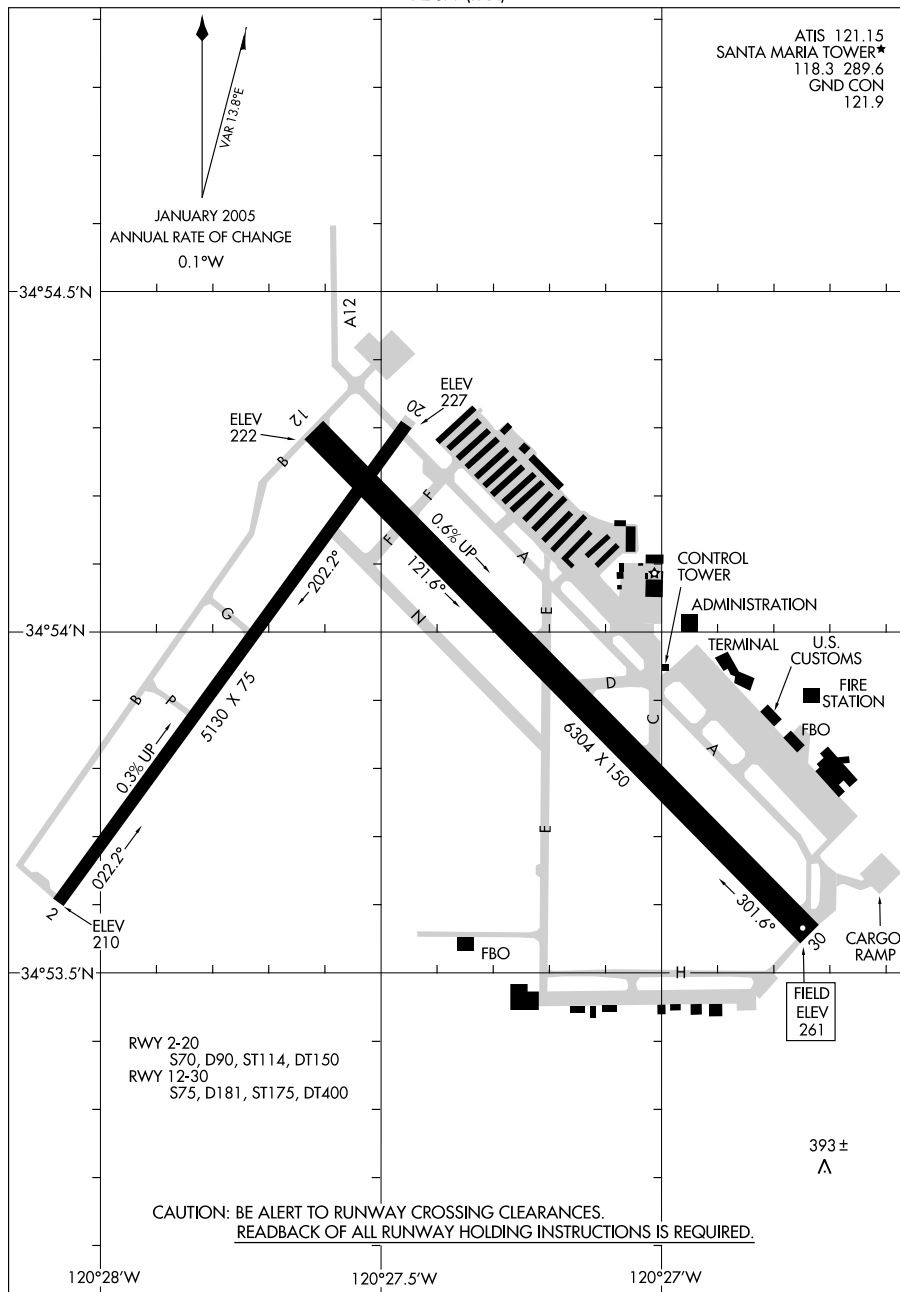

AIRPORT DIAGRAM


07074

SANTA MARIA PUBLIC/CAPTAIN G. ALLAN HANCOCK FIELD (SMX)
SANTA MARIA, CALIFORNIA

06327

AIRPORT DIAGRAM

AL-5023 (FAA)

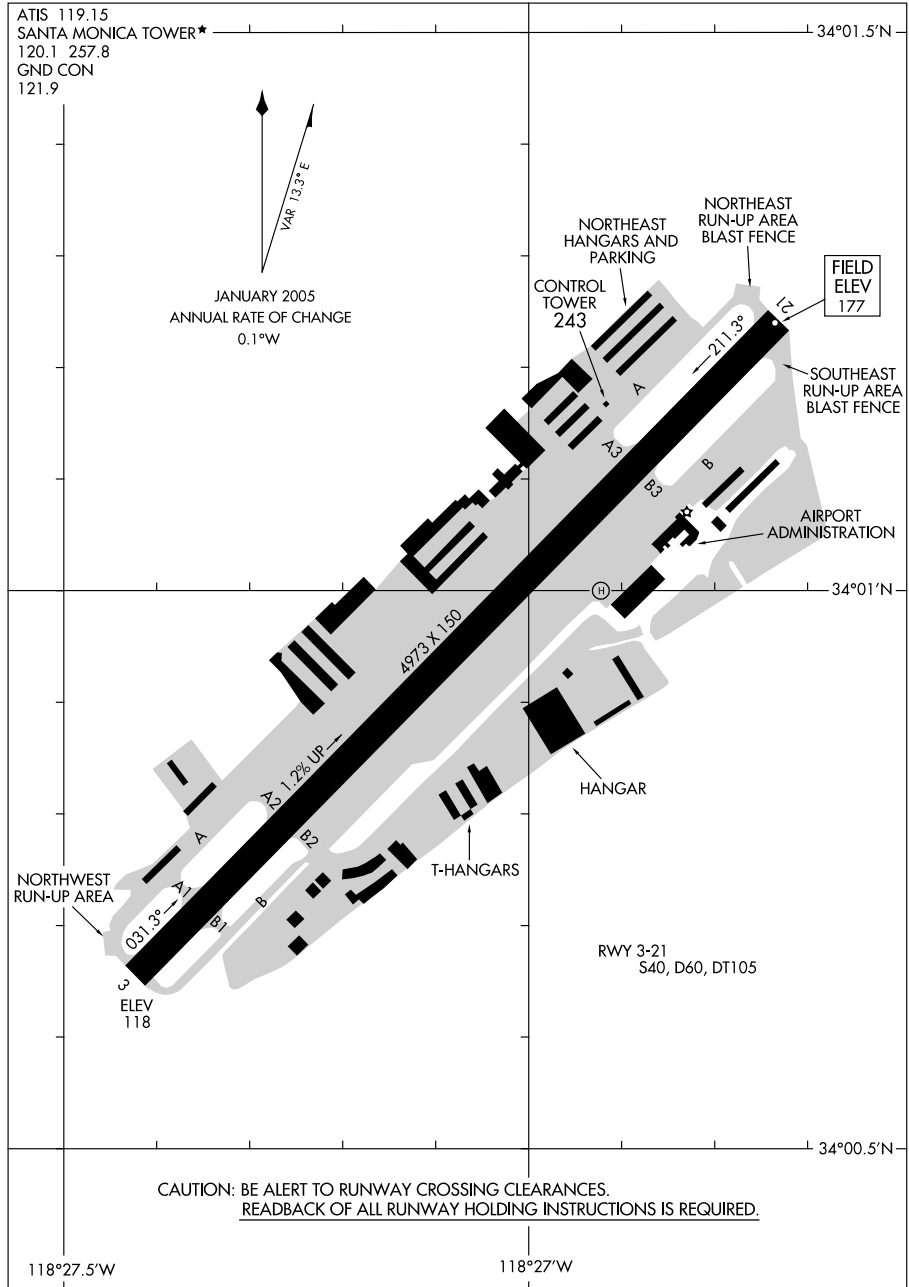SANTA MONICA MUNI (SMO)
SANTA MONICA, CALIFORNIA

AIRPORT DIAGRAM

06327

SANTA MONICA, CALIFORNIA
SANTA MONICA MUNI (SMO)


09015

AIRPORT DIAGRAM

SANTA ROSA/ CHARLES M. SCHULZ-SONOMA COUNTY (STS)

AL-696 (FAA)

SANTA ROSA, CALIFORNIA

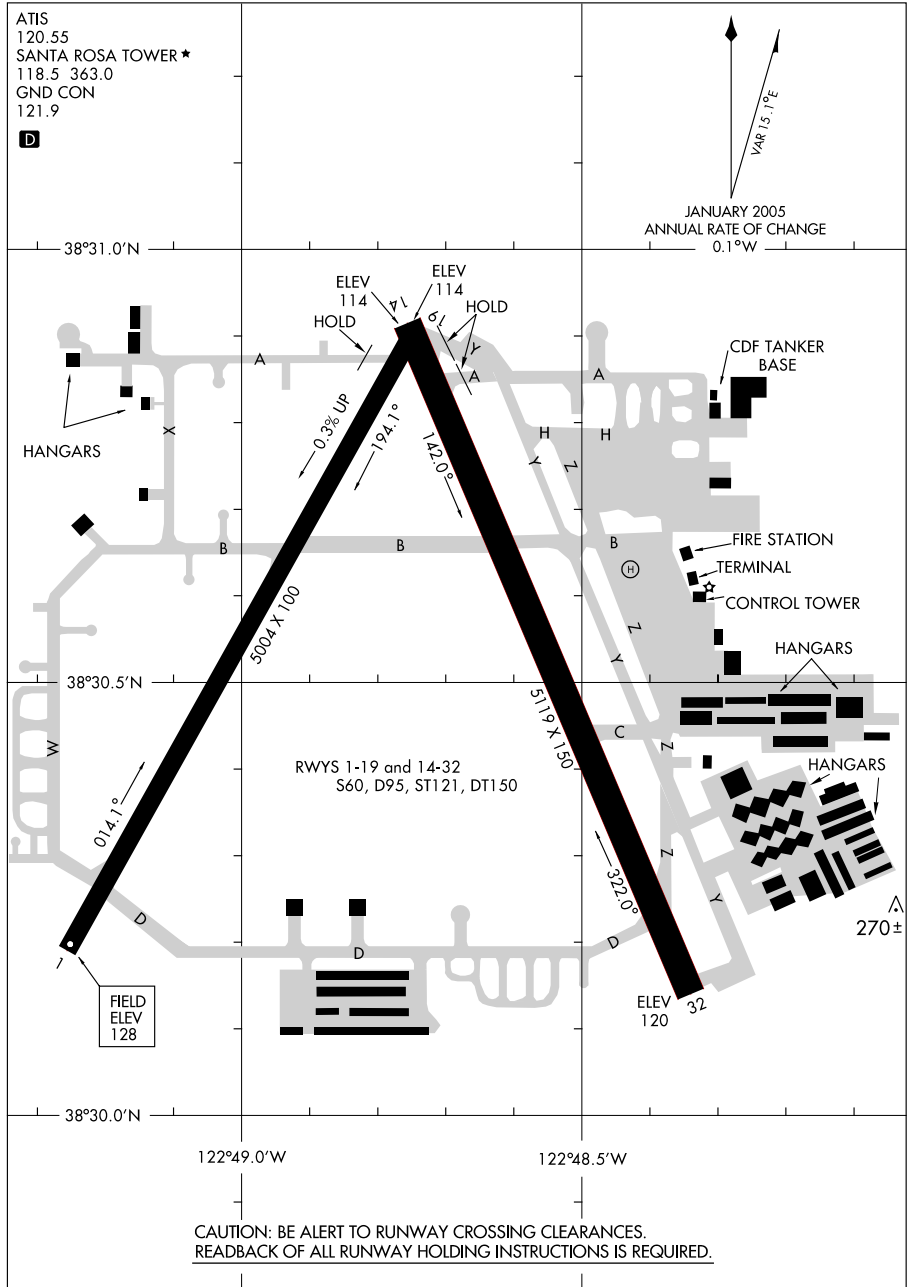


09071

AIRPORT DIAGRAM

AL-5651 (FAA)


SCOTTSDALE (SDL)
SCOTTSDALE, ARIZONA

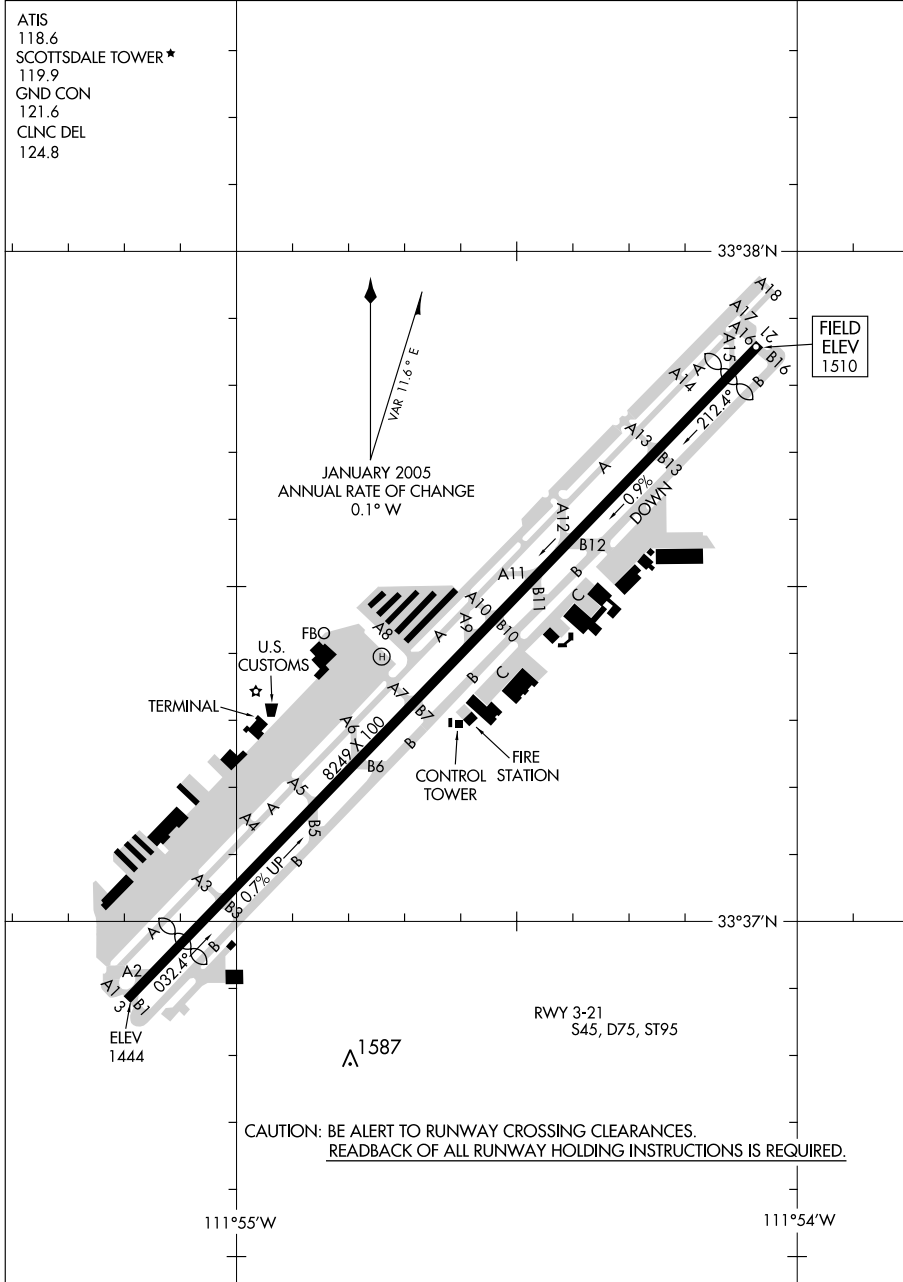

AIRPORT DIAGRAM

09071

SCOTTSDALE, ARIZONA
SCOTTSDALE (SDL)

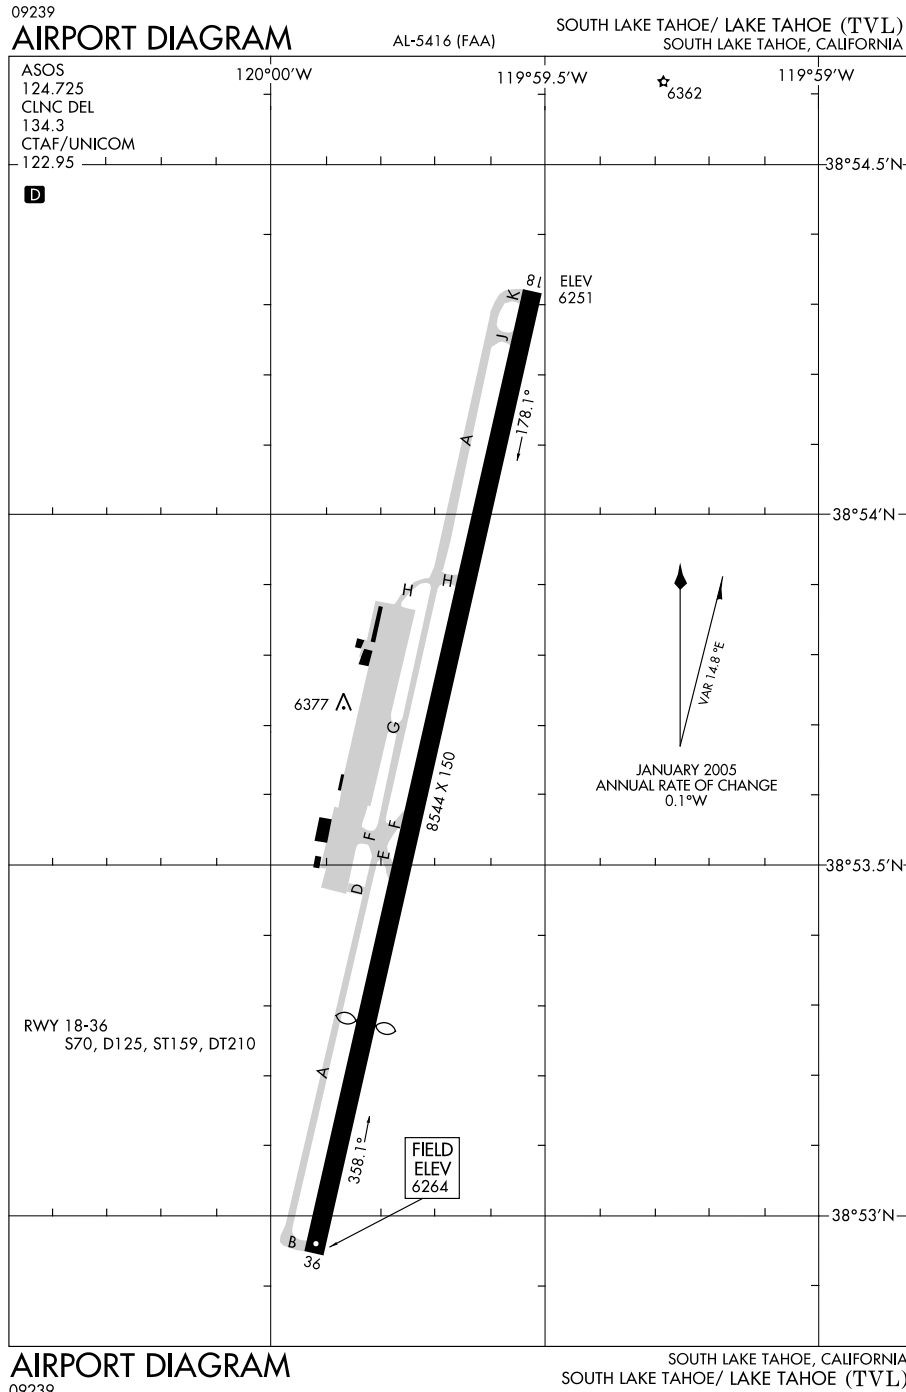


09127

AIRPORT DIAGRAM

AL-407 (FAA)

STOCKTON METROPOLITAN (SCK)
STOCKTON, CALIFORNIA

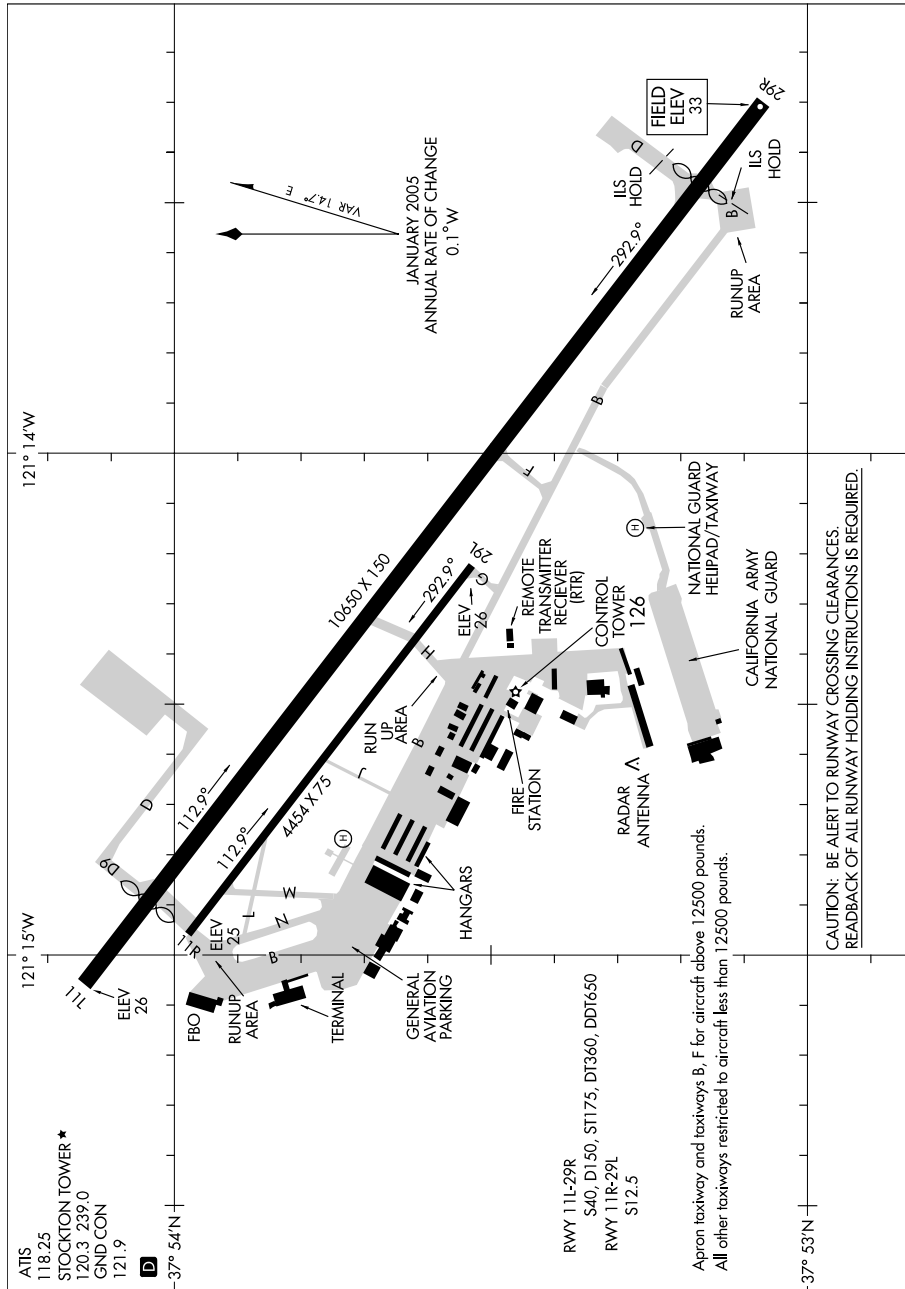

AIRPORT DIAGRAM

09127


STOCKTON, CALIFORNIA
STOCKTON METROPOLITAN (SCK)

09239

AIRPORT DIAGRAM

AL-423 (FAA)

TONOPAH (TPH)
TONOPAH, NEVADA

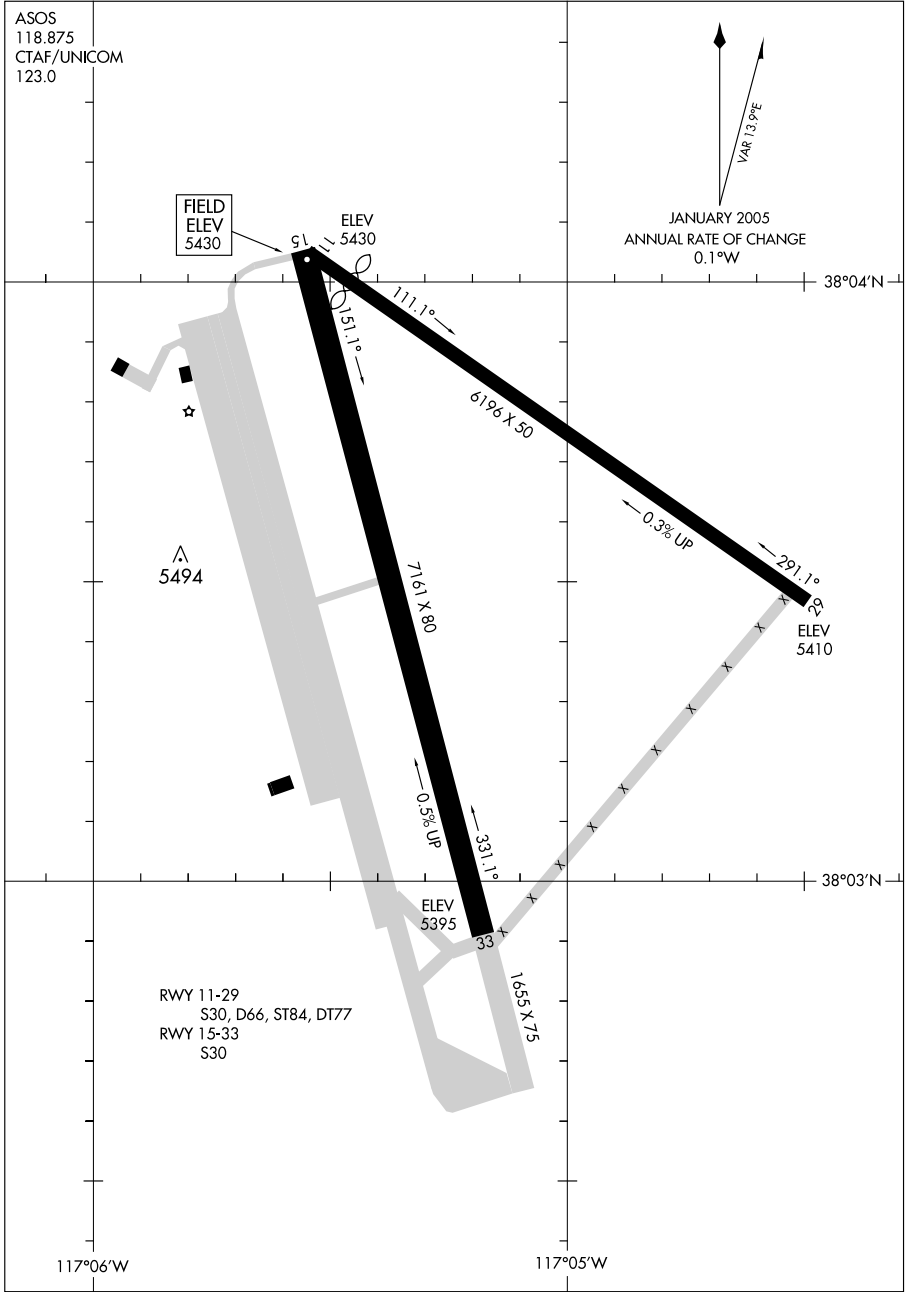

AIRPORT DIAGRAM

09239


TONOPAH, NEVADA
TONOPAH (TPH)

09071

AIRPORT DIAGRAM

AL-5179 (FAA)

TORRANCE/ZAMPERINI FIELD (TOA)
TORRANCE, CALIFORNIA

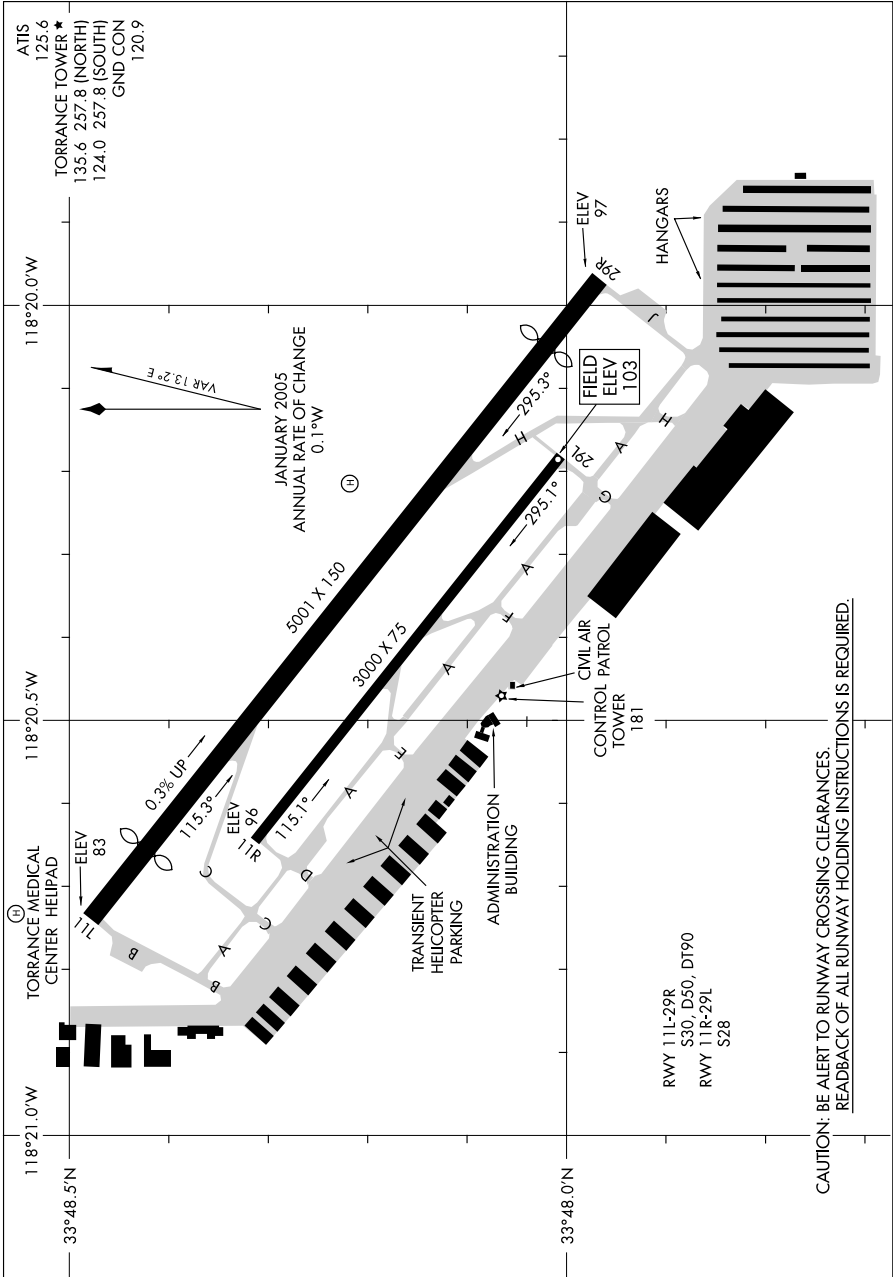

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM

TORRANCE, CALIFORNIA
TORRANCE/ZAMPERINI FIELD (TOA)

09071


09351

AIRPORT DIAGRAM

[USAF] AFD-488

TRAVIS AFB (KSUU)

FAIRFIELD, CALIFORNIA

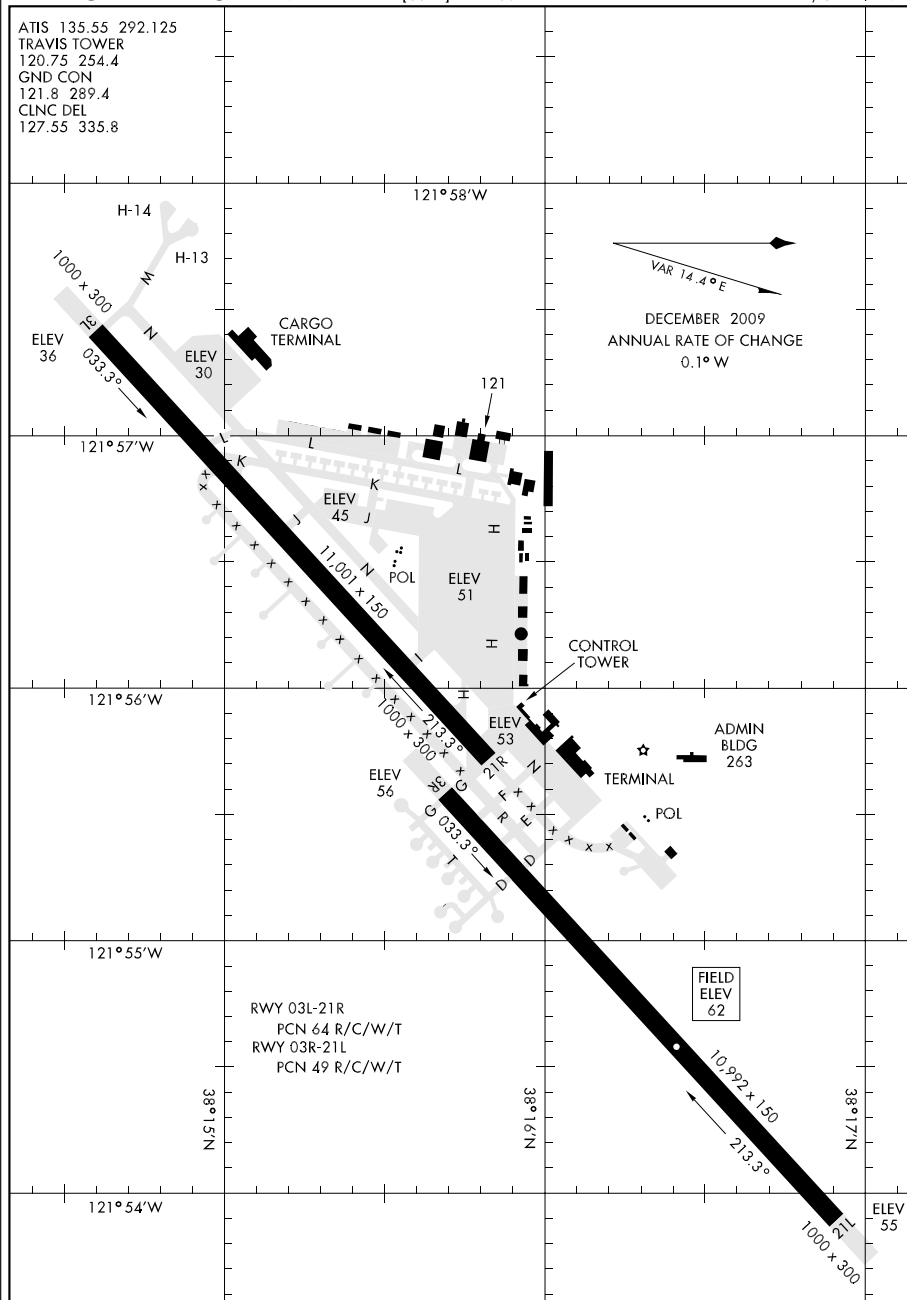

AIRPORT DIAGRAM

FAIRFIELD, CALIFORNIA


TRAVIS AFB (KSUU)

09351

AIRPORT DIAGRAM

AL-6513 (FAA)

TUCSON/RYAN FIELD (RYN)
TUCSON, ARIZONA

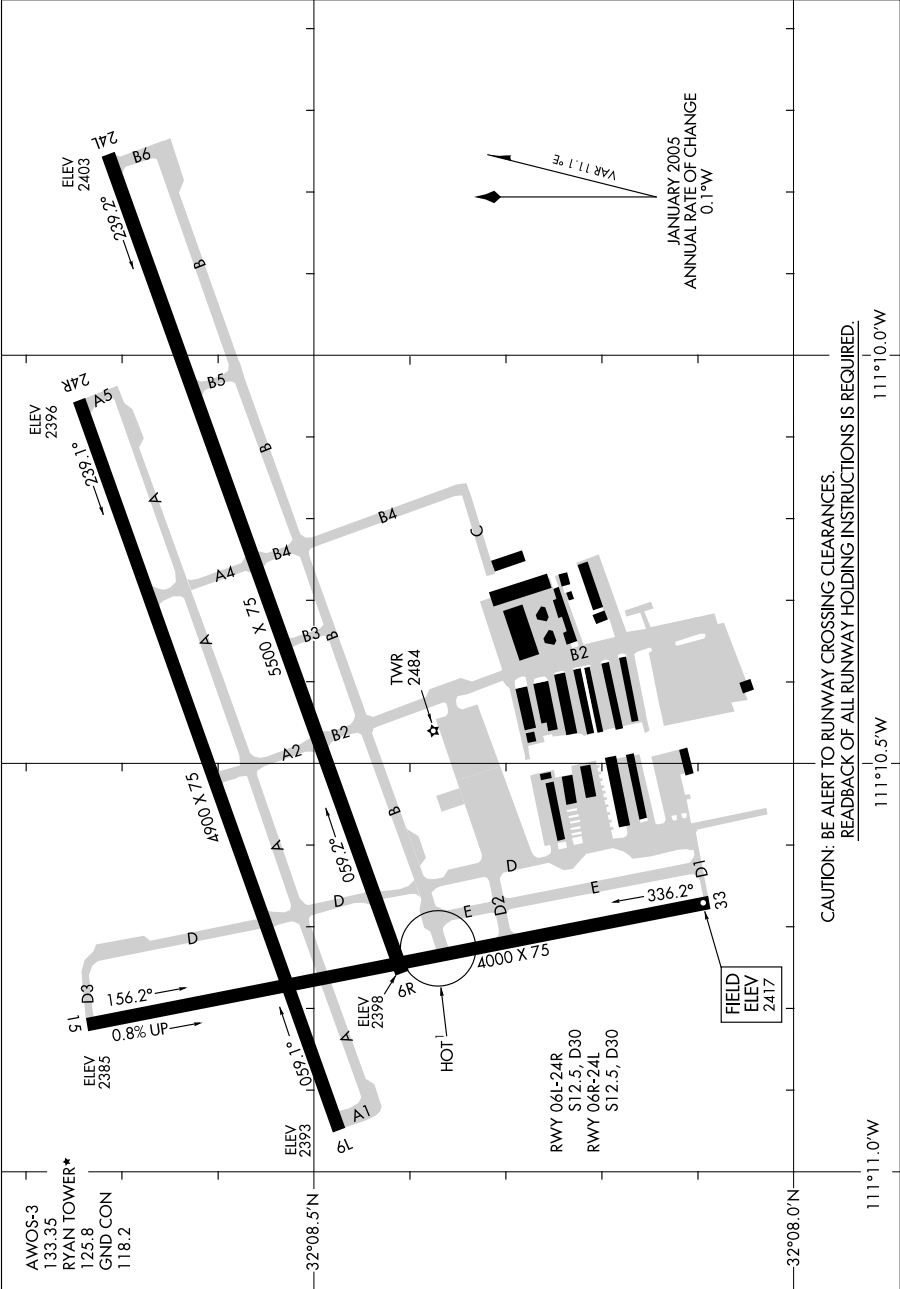

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
REARBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

AIRPORT DIAGRAM

09351

TUCSON, ARIZONA
TUCSON/RYAN FIELD (RYN)

09015


AIRPORT DIAGRAM

AFD-3160 [USN]

TWENTYNINE PALMS SELF (KNXP)

TWENTYNINE PALMS, CALIFORNIA

ATIS 386.35
TWENTYNINE PALMS TOWER
135.525 340.2
GND CON
363.35 41.7

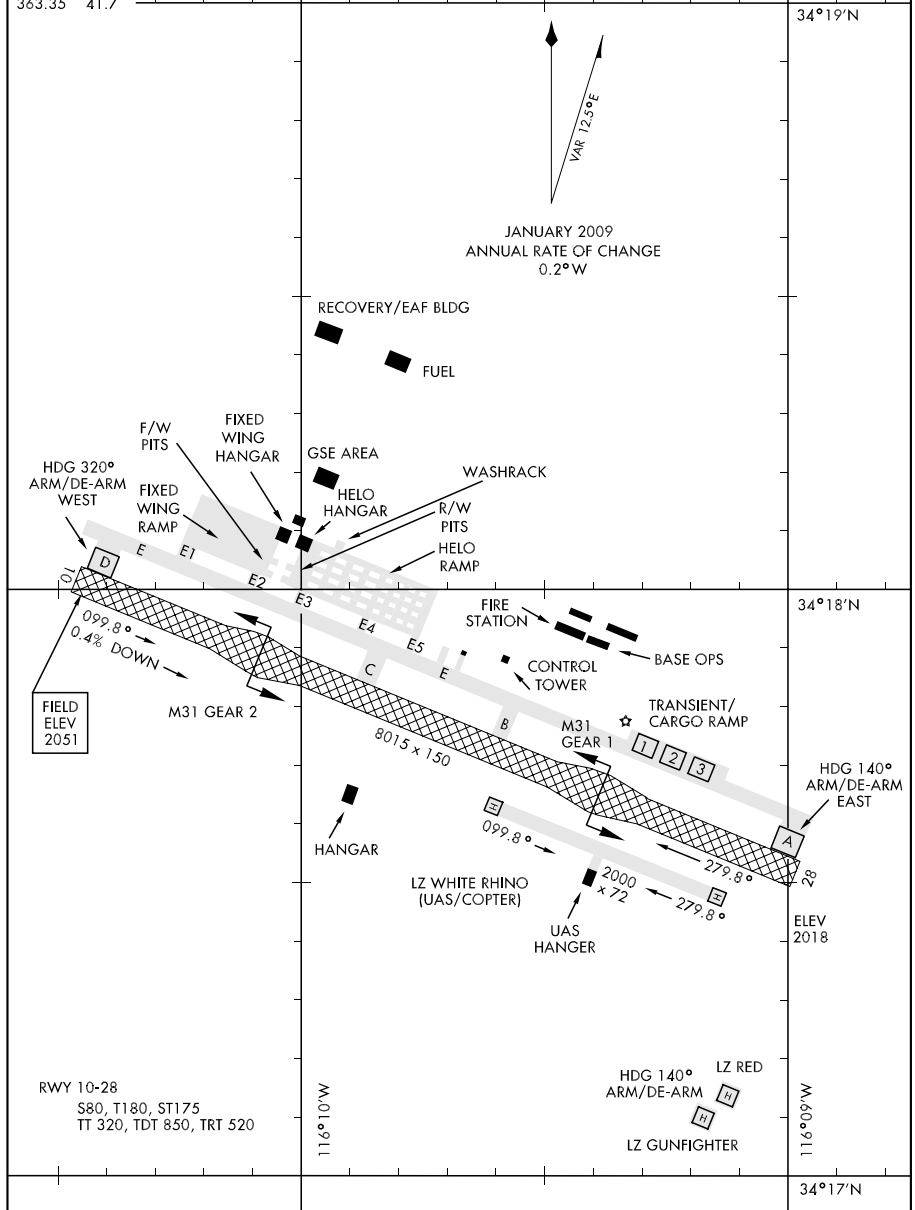


AIRPORT DIAGRAM

TWENTYNINE PALMS, CALIFORNIA
TWENTYNINE PALMS SELF (KNXP)

09183

AIRPORT DIAGRAM

AL-552 (FAA)

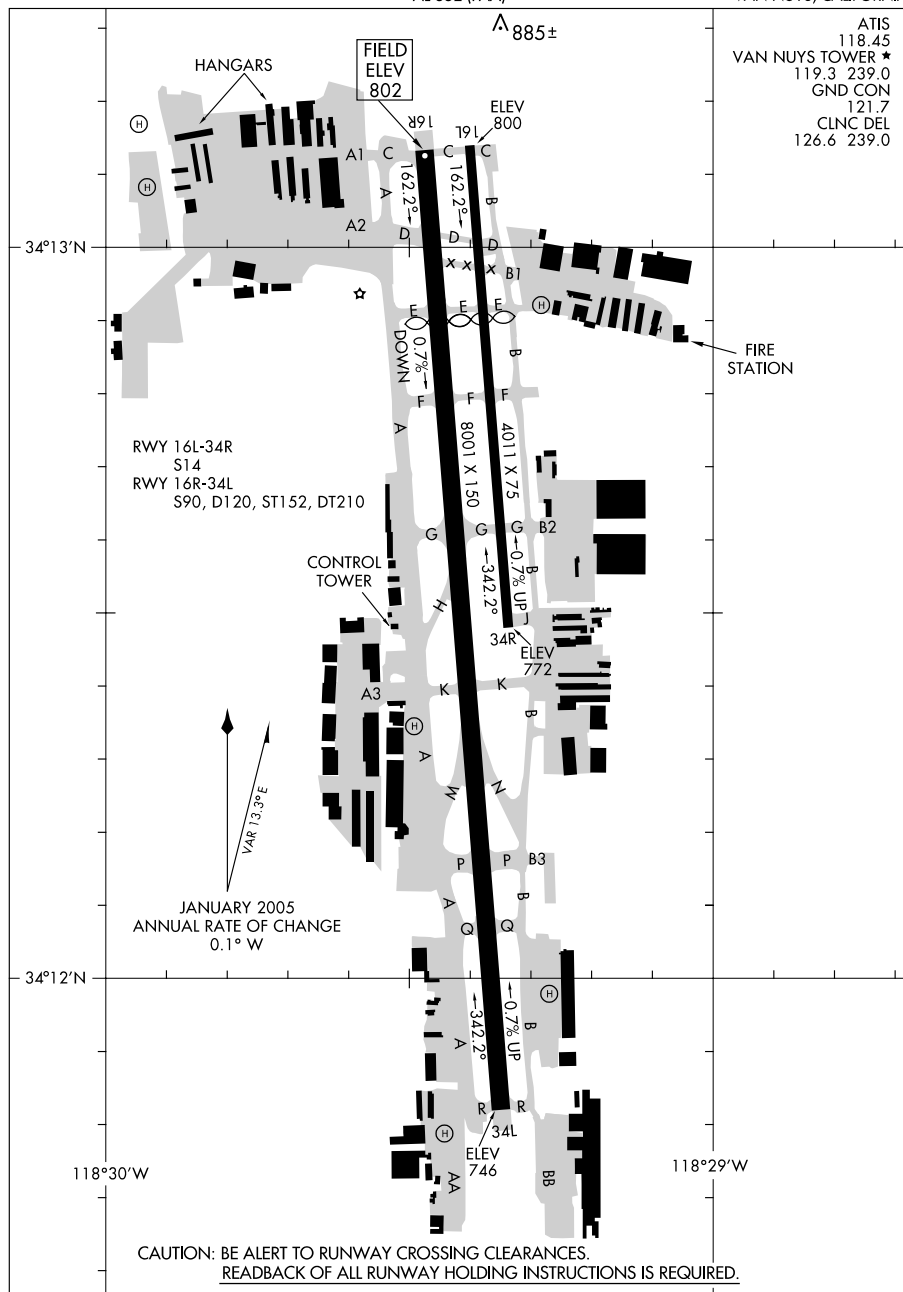VAN NUYS (VNY)
VAN NUYS, CALIFORNIA

AIRPORT DIAGRAM

09183

VAN NUYS, CALIFORNIA
VAN NUYS (VNY)


07242

AIRPORT DIAGRAM

AFD-770 [USAF]

VANDENBERG AFB (KVBG)

LOMPOC, CALIFORNIA

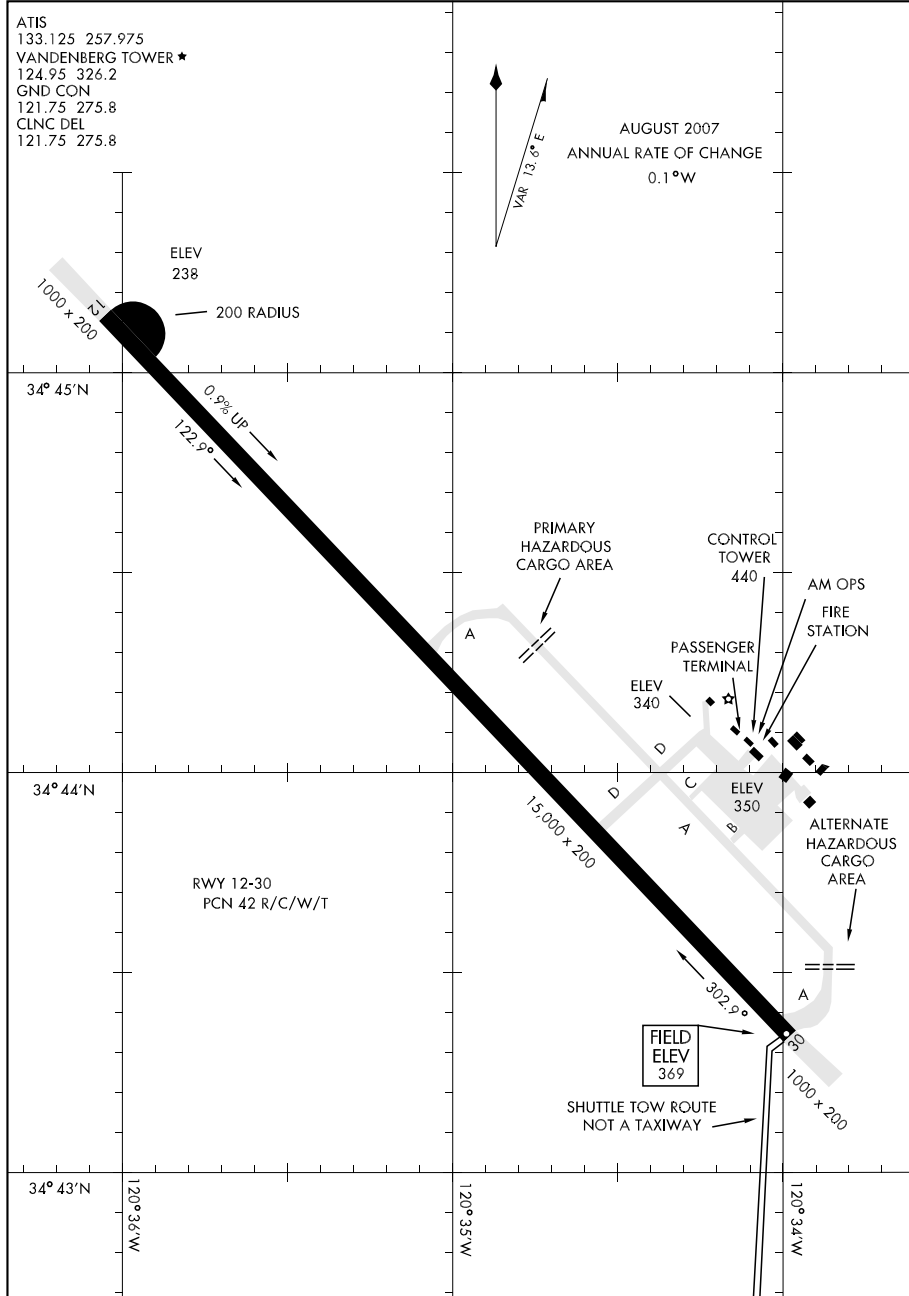

AIRPORT DIAGRAM

LOMPOC, CALIFORNIA


VANDENBERG AFB (KVBG)

YUMA, ARIZONA

YUMA MCAS/YUMA INTL (KNYL)

SW, 17 DEC 2009 to 11 FEB 2010

NATIONAL WEATHER SERVICE (NWS) UPPER AIR OBSERVING STATIONS (UAOS) AND WEATHER RADAR NETWORK

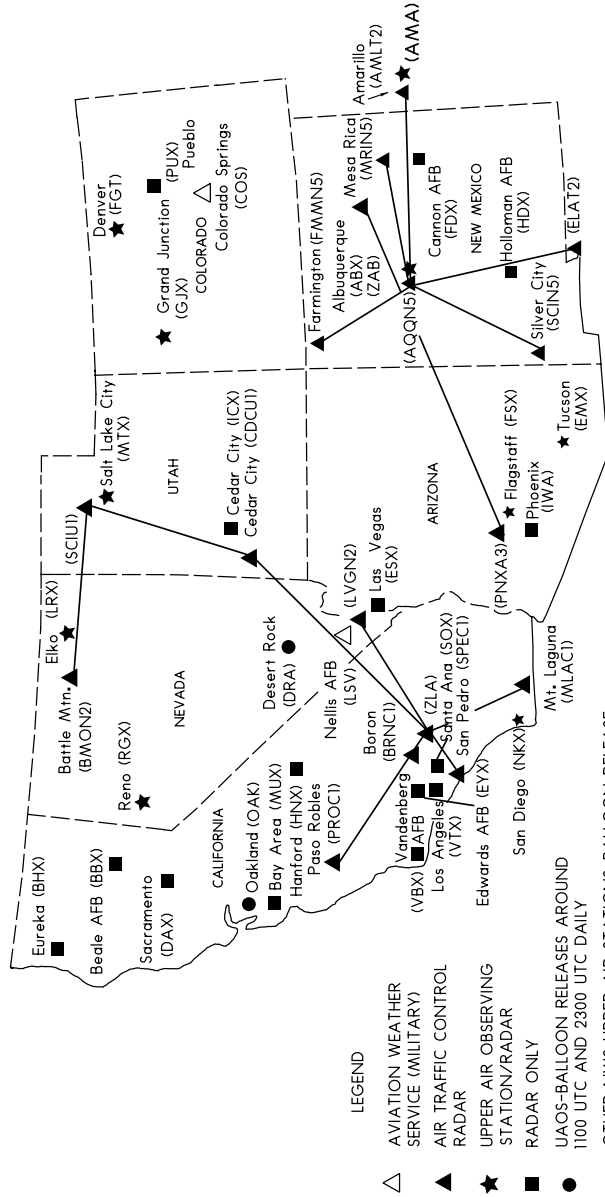

- LEGEND
- △ AVIATION WEATHER SERVICE (MILITARY)
 - ★ AIR TRAFFIC CONTROL RADAR
 - UPPER AIR OBSERVING STATION/RADAR
 - RADAR ONLY
 - UAOS-BALLOON RELEASES AROUND 1100 UTC AND 2300 UTC DAILY
 - OTHER NWS UPPER AIR STATIONS-BALLOON RELEASE TIMES ARE FLEXIBLE BUT GENERALLY AROUND SUNRISE AND/OR EARLY AFTERNOON

NOTE: FOR RELEASE LATER THAN 1130 UTC AND 2330 UTC, AND FOR SPECIAL RELEASES AT OTHER THAN THE SCHEDULED HOURS, AN AERONAUTICAL INFORMATION MESSAGE WILL BE FILED.